
TAPES, SEALANTS AND MEMBRANES

AIRTIGHTNESS, WIND TIGHTNESS

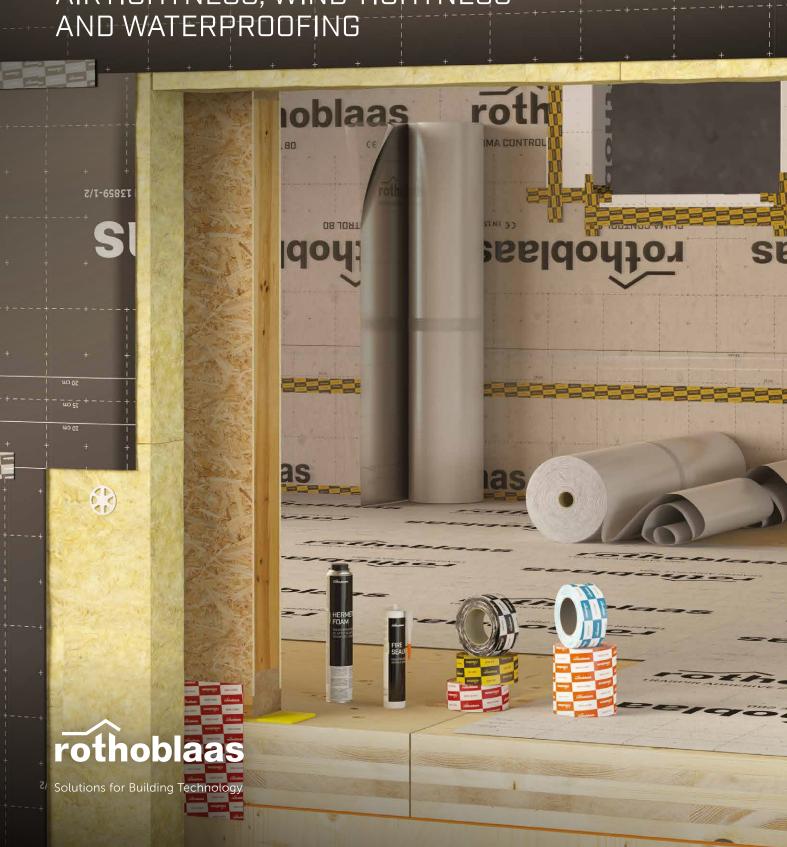

I TAPES AND SEALANTS

CONNECTION TO	THE GROUND	28
	START BAND	30
	CONNECT BAND	32
0	LEVEL BAND	
	GROUND BAND	
	RADON FLOOR	
	TERMI FLOOR	
	BYTUM BAND	
	PROTECT	
	BYTUM SPRAY	
	BYTUM LIQUID REINFORCEMENT	
	·	
	FLUID MEMBRANE	
•	CONSTRUCTION SEALING	
	TIE-BEAM STRIPE	54
ACRYLIC TAPES		56
	ALU BAND	61
	DOUBLE BAND	62
	SEAL BAND SEAL SQUARE	64
	EASY BAND	
	SPEEDY BAND	
	FLEXI BAND	
	FLEXI BAND UV	
\cup \cup	FACADE BAND UV	
	SOLID BAND	
	SMART BAND	
	PLASTER BAND LITE	
	PLASTER BAND LITE	
	FRONT BAND UV 210	
	TERRA BAND UV	
	PRIMER SPRAY	
	PRIMER	103
EXPANDING TAP	PES	104
	EXPAND BAND	108
	WINDOW BAND	110
	FRAME BAND	112
SEALANTS		114
OLALANI D	5.07.50.77	
	EASY FOAM	
	HERMETIC FOAM	
	FIRE FOAM	118
	MS SEAL	
	FIRE SEALING ACRYLIC	122
	FIRE SEALING SILICONE	124
	NAIL PLASTER GEMINI	126
	NAIL BAND	128
	BUTYL BAND	129
	FIRE STRIPE	130
	SUPRA BAND	132
	ALU BUTYL BAND	134
	BLACK BAND	136
	MANICA PLASTER	138
	MANICA FLEX	140
	MANICA POST	142
	MANICA LEAD	142
	TUBE STOPPER	
~	AI PHA	143

FASTENE	ERS		144
0	***************************************	DGZTHERMOWASHERISULFIX	144
GLUES			146
		MEMBRANE GLUE	149 150

ROOF AND VENTILATION 163 ELEMENTS

RIDGE		168
	NET ROLL	168
	STANDARD ROLL	169
	METAL ROLL	170
	BRUSH VENT	171
	PEAK VENT AISI 430	172
	PEAK ONE	173
	PEAK EASY	174
	PEAK HOOK	175
	SUPPORT BATTEN	176
CHIMNEY CONN	FCTION	178
OTHINITE T OOTH		
	ALU FLASH CONNECT	
	SOFT FLASH CONNECT	
	MANICA ROLL	
	GUTTER	1/9
EAVES GUTTER		180
	VALLEY ALU	180
	GASKET	180
	FIGN	
SNOW PROTECT	ΓΙΟΝ	181
SNOW PROTECT	FION SNOW STOP	
		181
	SNOW STOP	181
	SNOW STOP	
	TILE STOP S	
	TILE STOP S TILE STOP L	
	TILE STOP S	
CLIPS	TILE STOP S TILE STOP L	
CLIPS	TILE STOP S TILE STOP L TILE STOP WIND TILE STOP WIND COPPO	181 182 182 183 184 185
CLIPS	TILE STOP S TILE STOP L TILE STOP WIND TILE STOP WIND COPPO ND PROTECTION VENT MESH	181 182 182 183 184 185 186
CLIPS	TILE STOP S TILE STOP L TILE STOP WIND TILE STOP WIND COPPO	181 182 182 183 184 185 186 186
CLIPS	TILE STOP S TILE STOP L TILE STOP WIND TILE STOP WIND COPPO ND PROTECTION VENT MESH VENT GRILLE	181 182 182 183 184 185 186 186 186
CLIPS	TILE STOP S TILE STOP L TILE STOP WIND TILE STOP WIND COPPO ND PROTECTION VENT MESH VENT GRILLE VENT FOLD	181 182 182 183 184 185 186 186 186 187
CLIPS	TILE STOP S TILE STOP L TILE STOP WIND TILE STOP WIND COPPO ND PROTECTION VENT MESH VENT GRILLE VENT FOLD BIRD SPIKE	181 182 183 184 185 186 186 187 187
CLIPS	TILE STOP S TILE STOP L TILE STOP WIND TILE STOP WIND COPPO ND PROTECTION VENT MESH VENT GRILLE VENT FOLD BIRD SPIKE BIRD COMB	181 182 182 183 184 185 186 186 186 187 187
CLIPS	TILE STOP S TILE STOP L TILE STOP WIND TILE STOP WIND COPPO ND PROTECTION VENT MESH VENT GRILLE VENT FOLD BIRD SPIKE BIRD COMB BIRD COMB EVO	181 182 182 183 184 185 186 186 187 187 188 189

MEMBRANES

197 | TOOLS

BARRIE	RS AND	STOPS	205
		BARRIER NET SD40	206
		BARRIER SD150	208
		BARRIER NET ADHESIVE 200	210
		BARRIER ALU NET SD150	213
		BARRIER ALU NET SD1500	214
		BARRIER ALU FIRE A2 SD2500	216
		VAPOR IN 120	218
		VAPOR IN NET 140	219
_		VAPOR IN GREEN 200	221
		CLIMA CONTROL 80	228
		CLIMA CONTROL NET 145	
		CLIMA CONTROL NET 160	
		VAPOR NET 110	
		VAPOR 140	
		VAPOR 150	
		VAPOR NET 180	
		VAPOR EVO 190	
		VAPOR 225	
		VAPOR ADHESIVE 260	
		V/II GI(/IB/1231V2 200	
BREATH	IABLE		247
		TRASPIR 95	252
		TRASPIR 110	
	_	TRASPIR EVO UV 115	254
		TRASPIR ALU 120	. 256
		TRASPIR 135	
		TRASPIR 150	
		TRASPIR NET 160	
		TRASPIR EVO 160	
		TRASPIR 200	264
		TRASPIR ALU 200	
		TRASPIR EVO SEAL 200	
		TRASPIR FELT EVO UV 210	
		TRASPIR EVO UV 210	
		TRASPIR EVO 220	
		TRASPIR ADHESIVE 260	
		TRASPIR DOUBLE NET 270	
		TRASPIR EVO 300	
		TRASPIR DOUBLE EVO 340	
V.		TRASPIR WELD EVO 360	
		TRASPIR ALU FIRE A2 430	
		TRASPIR METAL	
BITUMIN	NOUS		301
		BYTUM 400	302
		BYTUM 750	
		BYTUM 1100	
		BYTUM 1500	
		BYTUM 2000	
		BYTUM BASE 2500	
1 1		BYTUM SLATE 3500	
		SHINGLE	314

TARPAULINS FO	R ROOFS	322
	CAP SUPER	
INSTALLATION		325
	ROLLER	
CUTTING TOOLS		328
400	MARLIN CUTTER LAMA KOMPRI CLAMP	328
STAPLERS		330
	HAMMER STAPLER 47. HAMMER STAPLER 22. HAND STAPLERSTAPLES	330
GUNS		332
	FLY SOFTFLY FOAMFOAM CLEANER	332

I RESEARCH & DEVELOPMENT

LABORATORY TESTING AND EXPERIMENTAL CAMPAIGNS

ROTHOBLAAS LABORATORY

Our innovative laboratory is located within our headquarters and it allows us to test our products.

We have all the necessary equipment to test our solutions under the most extreme conditions: high-temperature test ovens, UV-accelerated ageing test chambers, low-temperature test chambers, abrasimeters and outdoor spaces for weathering.






With the Martindale test we investigate our membranes wear, tear and pilling resistance. With ovens and low-temperature chambers we test the behaviour of our products when exposed to extreme temperatures.






Exposure to outdoor environments makes it possible to test weathering resistance, under the synergistic effect of UV, humidity, heat and rain.



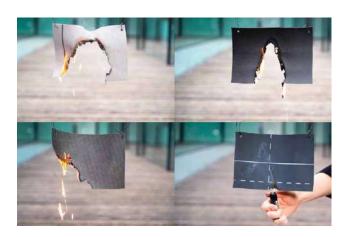

Experimental tests to investigate the water penetration resistance and fire behaviour of the membranes.



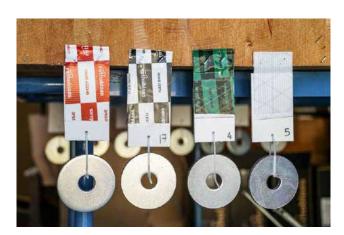


Test campaign on the cohesion and adhesion performance of acrylic adhesive tapes on different substrates.



Performance analysis of polyurethane sealing foams.



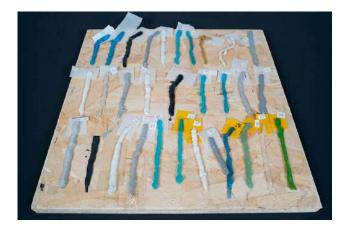



Test campaign to evaluate the adhesion, cohesion and elasticity of different glues and sealants.

QUALITY BUILDING

Modern construction is increasingly based on the use of quality materials and state-of-the-art building techniques that reduce the energy impact of the building without disregarding housing comfort and aesthetics.

REDUCING ENERGY CONSUMPTION

Numerous studies show that energy consumption in buildings causes over 40% of global CO₂ emissions. Greater attention paid to a more conscious use of energy during design is essential for both the environment and for economic savings.



MATERIALS

Each material influences the acoustic performance, thermal inertia and thermo-hygrometric regulation of the building



QUALITY OF **ENVIRONMENTS**

A healthy place to live has good air quality and protects against humidity, noise, radon gas and pollutants in general



VENTILATION

If there is no adequate ventilation, indoor air quality tends to deteriorate, as a consequence of the presence and accumulation of pollutants



THERMAL PERFORMANCE OF THE BUILDING CASING

To avoid energy wastage, the building must be insulated, thermal bridges must be minimised and air and wind tightness must be guaranteed



LOCATION

The design must be adapted to the climate and location to take into account minimum and maximum temperature, humidity, amount of natural lighting, etc.



RENEWABLE SOURCES

Give preference to the consumption of primary energy from renewable sources, limiting the use of energy from fossil fuels

■ INSPECTION TOOLS

In order to verify and document the real performance of the building, it is possible to carry out some non-destructive analyses that allow the identification and consequently the correction of possible installation errors.

With the Blower Door-Test a building is subjected to positive pressure of 50 Pa, while the quantity of air that filters from the surfaces which enclose the casing is measured. The lower the value of n_{50} , the better the energy performance, because there will be less uncontrolled air leakage that worsens the thermal performance of the building.

The thermal imaging camera, on the other hand, uses infrared radiation to detect, in real time, points with different temperatures and therefore heat losses due to insulation errors, thermal bridges, air leaks and dampness in the walls.


ATTENTION TO DETAILS

The durability of timber structures is closely linked to their correct design and construction.



■ THERMAL PERFORMANCE OF THE BUILDING CASING

To ensure excellent housing comfort and superior performance, a building must meet very strict energy criteria, which can only be achieved through careful design of all construction details.

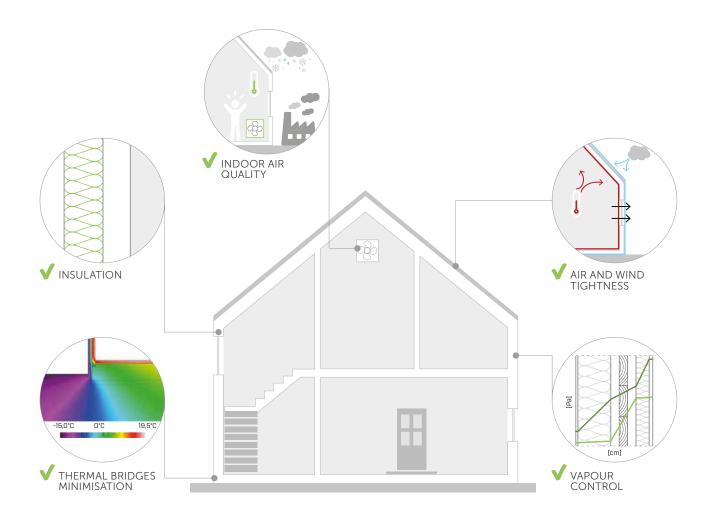

I AIR AND WIND TIGHTNESS

The airtight casing guarantees that in the winter warm air and humidity inside the building are not lost to the outside, preventing the formation of interstitial condensation. The hermetic nature of the casing offers energy savings and comfortable living.


The wind tightness layer does not replace the airtightness layer, but its purpose is to protect the insulation layer from wind, rain and weather, preventing cold air and water from reducing the performance of the insulation layer.

AIRTIGHTNESS

- ✓ Prevents heat loss in winter
- ✔ Prevents the entry of hot, humid air in summer
- ✔ Optimises the operation of controlled mechanical ventilation
- **✓** Prevents the uncontrolled passage of warm, moist air and the consequent risk of interstitial condensation
- ✔ Avoids discomfort due to draughts
- ▼ Improves acoustic comfort

WIND TIGHTNESS


- **✓** Ensures the thermal efficiency of the insulation layer
- ✔ Protects the casing and improves the durability of materials
- ✔ Avoids the formation of currents and convective motions within the casing
- ✓ Serves as a temporary protective layer during construction phases
- ✔ Acts as a temporary protective layer in the event of cracks and dislocation of the roof layer or façade cladding

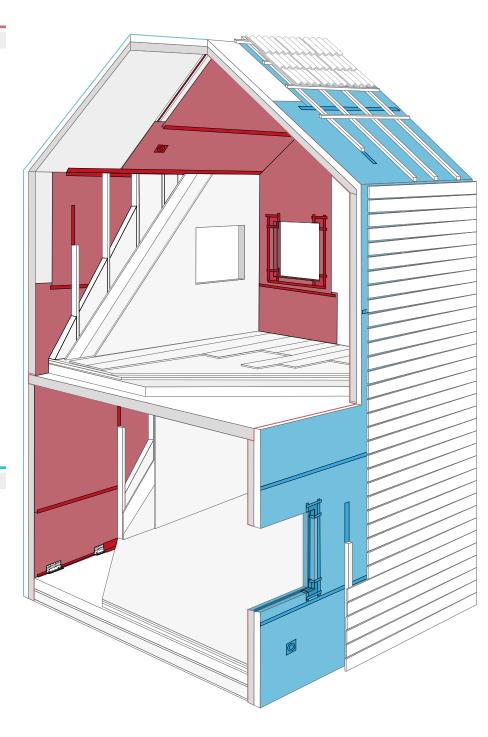

CLIMATE AND CONSTRUCTION SYSTEMS


In order to ensure optimal performance of the building casing, the processes of heat, vapour, air and wind transport that occur within the different components must be studied and controlled. Usually, in cold climates and during the winter months there are problems with excessive humidity inside buildings due to poor ventilation. The vapour produced in closed rooms penetrates the walls and may condense in contact with cold interstitial layers, beams or cladding. In contrast, in hot and humid climates the source of vapour that leads to mould growth is the outside air. Humidity that is drawn in with the outside air may condense near the interior surfaces, which are cooler with air conditioning.

Rothoblaas, in cooperation with other research institutes, has sponsored several projects aimed at studying the behaviour of building solutions exposed to different climatic conditions through laboratory tests and dynamic simulations.

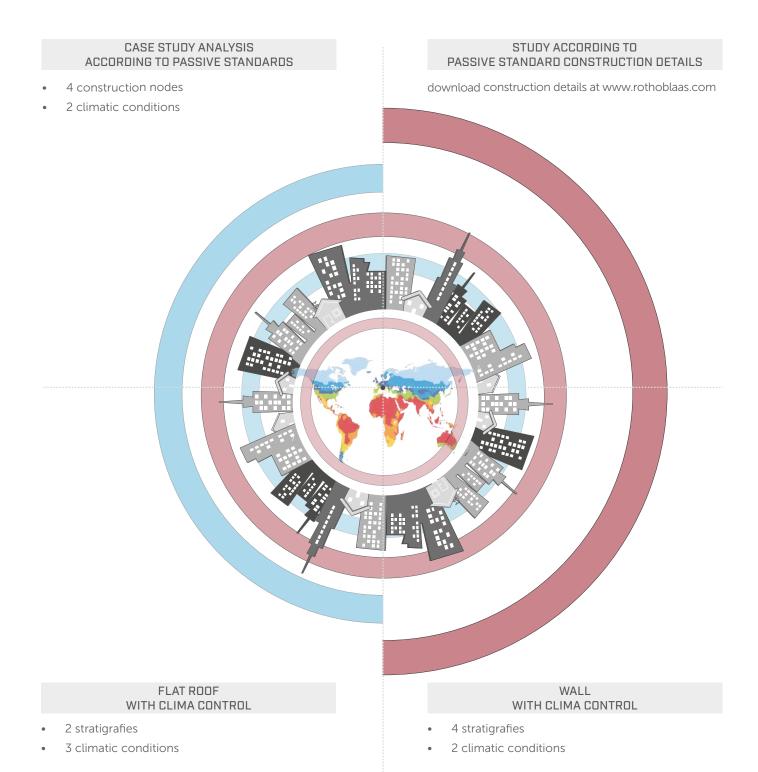

I CLIMATE REGIONS AND SOLUTIONS


Visit our website www.rothoblaas.com and find the ideal membrane for your climate region and building system! The choice of membranes to be placed inside the building casing is highly dependent on climatic conditions, for example: the vapour flow inside a layers placed in a tropical or torrid climate is the reverse of layers in an arctic or cold climate. With regard to climate regions identified by energy efficiency institutes, the following solutions are recommended. These can vary depending on the building system and the type of technical installations used. Recommended solutions must always be verified by a designer.

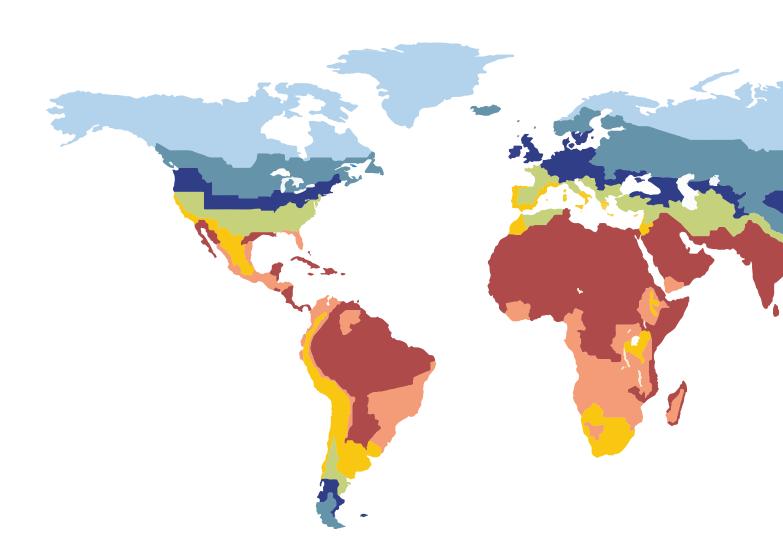



OUR KEY PRODUCTS IN THE WUFI® SOFTWARE

The WUFI® software is used to conduct thermo-hygrometric simulations in a dynamic state. Designers who use it regularly now have the option of including top-of-the-range Rothoblaas products in the simulation, obtaining highly accurate and reliable results as they are calculated on the real product that will be used to build the structure.

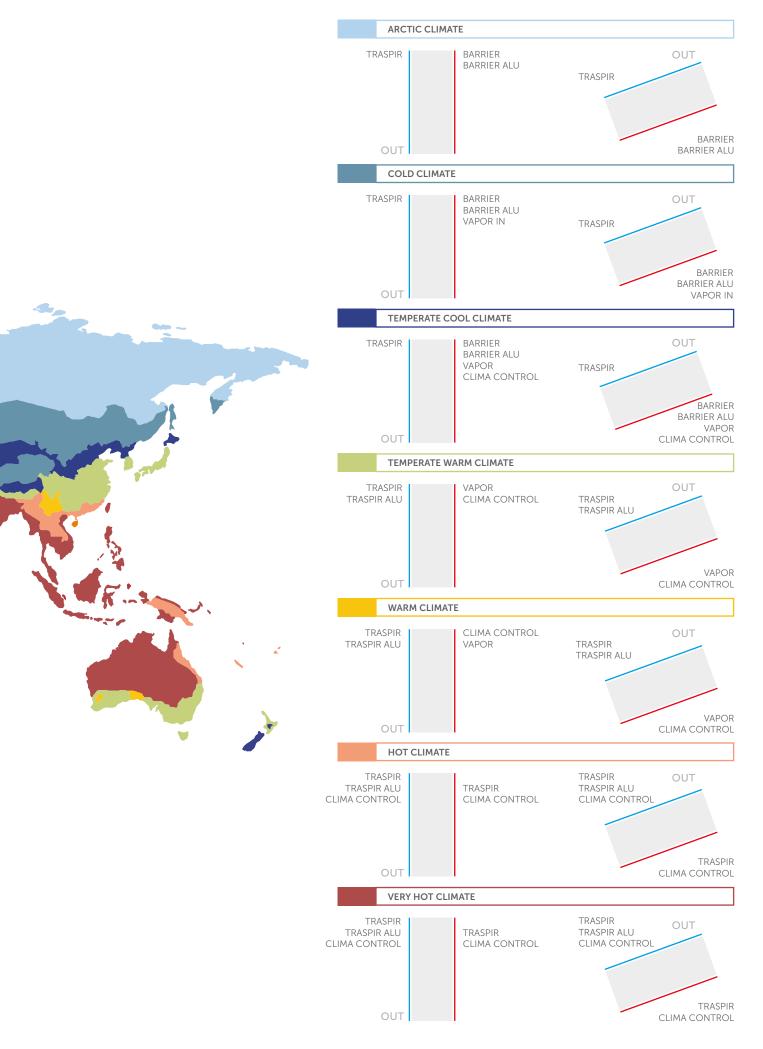

STRUCTURES AND FIRE BEHAVIOUR

All building typologies have to consider fire safety issues, depending on the regulations in force and the intended use. This was done in order to minimise the causes of fire, ensure the stability of the structure and limit the spread of flames both inwards and towards neighbouring buildings, guaranteeing the safety of the occupants and access for rescue teams.

WHAT IS FIRE PREVENTION

Fire prevention is the discipline that studies and puts into practice all measures aimed at preventing, reporting and reducing the probability of fire, or in any case limiting its negative effects on people and the environment. There are two types of fire prevention measures: active and passive protection.

PREVENTIVE MEASURES

Fire prevention measures range from the professional installation of electrical systems to the ventilation of rooms with vapours and gases, and extend to common sense measures such as respect for order and cleanliness.

It is also important to keep the level of training and information of emergency teams high at all times.

PROTECTIVE MEASURES

ACTIVE PROTECTION

Active protection consists of all measures that require human intervention or the automatic activation of a system or plant.







PASSIVE PROTECTION

Passive protection measures consist of measures that do not require human intervention or the operation of equipment. These measures must be planned in the design phase.








THE FIRE DESIGN STEPS



RISK CATEGORY

Depends on type, size and intended use of the building

STRUCTURES



FIRE RESISTANCE

Prevents the spread of fire to other areas

MATERIALS



REACTION TO FIRE

It limits the spread of flame

REACTION TO FIRE


The reaction to fire class is an indicator that provides an assessment of whether or not the material contributes to fire. Different material behaviours correspond to different classes, ranging from non-combustible products to extremely flammable materials.

European classification according to EN 13501-1

(b)	class A1	non-combustible products
•	classes A2, B, C, D, E	combustible products, as their participation in the fire increases
Ò	class F	indicates materials with Non-Determined Performance (NDP) or that do not reach Class E
	s1, s2, s3	are the three values indicating the optical density of smoke
4,4	d0, d1, d2	are the three values indicating the danger of dripping

FIRE RESISTANCE

Fire resistance indicates the ability of a building element to maintain structural stability during a fire condition for a given period of time, while retaining the ability to compartmentalise smoke and hot gases generated by combustion. The primary purpose of fire resistance is to ensure the load-bearing capacity of the structure under fire conditions. The characteristics that must be maintained during the action of fire are indicated by three letters:

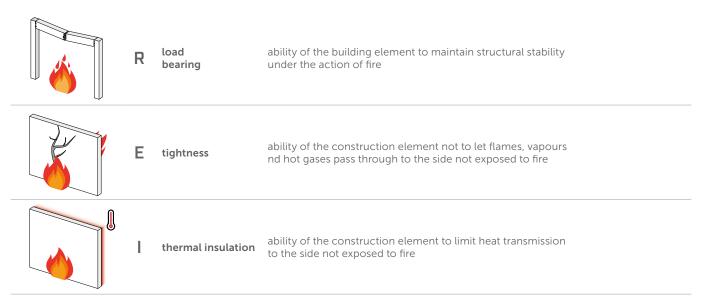

The fire resistance rating is expressed in minutes, during which resistance under the action of flames must be ensured:15, 20, 30, 45, 60, 90, 120, 180, 240 and 360 minutes. The indication of minutes follows the abbreviation REI (e.g. REI120). In the case of non-load-bearing structures, where the load-bearing capacity is not significant, the R factor can be omitted and the minutes can be expressed as El (e.g. El90).





Discover the different flame reactions of our products! Watch the video on our YouTube channel





I FIRE TEST


Awareness of fire design is increasingly growing. We have carried out many tests over the years to increase our know-how in this area and will continue to do so in the future.

■ SOME INVESTIGATIONS CARRIED OUT

XYLOFON AND FIRE

We tested different setups using XYLOFON and FIRE SEALING to understand how the behaviour of certain joints changes when subjected to the action of flames and to obtain El values related to the joints.



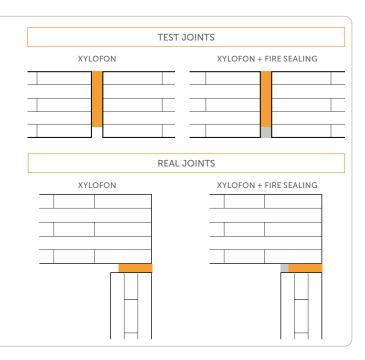

FRONT BAND UV 210

We have tested many of our products and assigned each of them a fire class according to EU and non-EU standards.



FULL-SCALE TESTING

In cooperation with RISE - Research Institutes of Sweden, we carried out full-scale tests to determine the EI value of some of the most common joints in timber construction.



■ FUTURE PROJECTS

Our next research projects will focus on studying the fire behaviour of the most common nodes in the world of timber construction in order to determine their REI value. Our aim is to study them from every point of view, taking into account both the static aspects and the airtightness, to understand how the response of the joint changes during a fire in relation to the elements present.

Keep following us on our channels to keep up to date with developments.

I FIRE SOLUTIONS

PRODUCT	DESCRIPTION	PAGE
FRONT BAND UV 210	UNIVERSAL SINGLE-SIDED TAPE, HIGHLY RESISTANT TO UV RAYS	EN 13501-1 B-51,60
FIRE FOAM	HIGH FIRE-RESISTANT SEALING FOAM	EN 13501-2 EI 240 EN 13501-1 B-s1,d0
FIRE SEALING ACRYLIC	HIGH FIRE-RESISTANT ACRYLIC SEALANT	EN 13501-2 EN 13501-1 B-51,d0 122
FIRE SEALING SILICONE	HIGH FIRE-RESISTANT SILICONE SEALANT	EN 13501-2 EN 13501-1 B-s1,d0
FIRE STRIPE	INTUMESCENT THERMO-INFLATABLE FLEXIBLE GASKET	NF P92-501 130
BARRIER ALU NET SD1500	REFLECTIVE VAPOUR BARRIER Sd > 1500 m	EN 13501-1 B-st,d0
BARRIER ALU FIRE A2 SD2500	REFLECTIVE AIR VAPOUR BARRIER FIRE REACTION CLASS A2-s1,d0	EN 13501-1 A2-s1,d0
TRASPIR EVO UV 115	HIGHLY BREATHABLE MONOLITHIC MEMBRANE RESISTANT TO UV RAYS	EN 13501-1 B-st,d0
TRASPIR EVO 160	HIGHLY BREATHABLE MONOLITHIC MEMBRANE	AS1530.2 EN 13501-1 B-st,d2
TRASPIR FELT EVO UV 210	BREATHABLE MONOLITHIC MEMBRANE RESISTANT TO UV RAYS	EN 13501-1 B-st,d2
TRASPIR EVO UV 210	HIGHLY BREATHABLE MONOLITHIC MEMBRANE RESISTANT TO UV RAYS	ASTM E84 class 1 class A EN 13501-1 B-st,d0 270
TRASPIR EVO 300	HIGHLY BREATHABLE MONOLITHIC MEMBRANE	EN 13501-1 B-st,d0
TRASPIR ALU FIRE A2 430	REFLECTIVE HIGHLY BREATHABLE MEMBRANE	EN 13501-1 A2-s1,d0

SEALANTS AND

I TAPES AND SEALANTS

START BAND WATERPROOFING PROFILE WITH HIGH
MECHANICAL RESISTANCE
CONNECT BAND SEALING WALL BARRIER FOR IRREGULAR SUBSTRATES
LEVEL BAND SEALING WALL BARRIER FOR FOUNDATIONS
GROUND BAND SELF-ADHESIVE BITUMINOUS MEMBRANE
RADON FLOOR WATERPROOFING RADON GAS BARRIER FOR FOUNDATIONS
TERMI FLOOR WATERPROOFING ANTI-TERMITE BARRIER FOR FOUNDATIONS
BYTUM BAND SELF-ADHESIVE BITUMINOUS BAND, CAN BE PLASTERED42
PROTECT SELF-ADHESIVE BUTYL BAND, IT CAN BE PLASTERED44
BYTUM SPRAY BITUMINOUS MEMBRANE SEALANT SPRAY
BYTUM LIQUID REINFORCEMENT SPREADABLE WATERPROOFING SHEATH REINFORCING LAYER
FLUID MEMBRANE SYNTHETIC SEALING MEMBRANE FOR BRUSH AND SPRAY APPLICATION
CONSTRUCTION SEALING COMPRESSIBLE SEALING GASKET FOR REGULAR JOINTS 52
TIE-BEAM STRIPE TIE BEAM SEALING PROFILE
ALU BAND REFLECTIVE SINGLE-SIDED ADHESIVE TAPE FOR INDOOR USE
DOUBLE BAND UNIVERSAL DOUBLE-SIDED TAPE
SEAL BAND SEAL SQUARE SINGLE-SIDED TAPE FOR INDOOR USE
EASY BAND UNIVERSAL SINGLE-SIDED TAPE
SPEEDY BAND UNIVERSAL SINGLE-SIDED TAPE WITHOUT RELEASE LINER
FLEXI BAND UNIVERSAL SINGLE-SIDED HIGH-ADHESIVE TAPE
FLEXI BAND UV UNIVERSAL SINGLE-SIDED ADHESIVE TAPE WITH HIGH UV STABILITY AND HEAT RESISTANCE
FACADE BAND UV UNIVERSAL SINGLE-SIDED TAPE, RESISTANT TO UV RAYS 76

SOLID BAND ROBUST SINGLE-SIDED ADHESIVE TAPE SUITABLE FOR LOW TEMPERATURES	SUPRA BAND UNIVERSAL DOUBLE-SIDED BUTYL TAPE WITH HIGH ADHESIVENESS
SMART BAND UNIVERSAL SINGLE-SIDED TAPE WITH SEPARABLE LINER80	ALU BUTYL BAND REFLECTING BUTYL ADHESIVE TAPE
PLASTER BAND SPECIAL HIGH-ADHESION TAPE, CAN BE ALSO PLASTERED	BLACK BAND UNIVERSAL SINGLE-SIDED BUTYL TAPE
PLASTER BAND LITE TAPE WITH ADHESIVE MOUNTING STRIP,	MANICA PLASTER ADHESIVE SEALING SLEEVE THAT CAN BE PLASTERED
FRONT BAND UV 210	MANICA FLEX SEALING SLEEVE FOR CONDUIT AND CABLE PASSAGE
UNIVERSAL SINGLE-SIDED TAPE, HIGHLY RESISTANT TO UV RAYS	MANICA POST ADHESIVE SEALING SLEEVE FOR OUTDOORS142
TERRA BAND UV BUTYL ADHESIVE TAPE	MANICA LEAD LEAD PROFILE WITH EPDM SLEEVE
PRIMER SPRAY UNIVERSAL SPRAY PRIMER FOR ACRYLIC ADHESIVE TAPES	TUBE STOPPER CABLE SEALING PLUGS
PRIMER UNIVERSAL PRIMER FOR ACRYLIC ADHESIVE TAPES	ALPHA PRESHAPED PROFILE FOR SEALING CORNERS
EXPAND BAND SELF-EXPANDING SEALING TAPE	LITE BAND ACRYLIC SINGLE-SIDED ADHESIVE TAPE
WINDOW BAND SELF-EXPANDING SEALING TAPE	DGZ DOUBLE THREADED SCREW FOR INSULATION
FOR WINDOWS/DOORS110	THERMOWASHER WASHER TO FASTEN INSULATION TO TIMBER
FRAME BAND SELF-EXPANDING SEALING TAPE FOR WINDOWS/DOORS	ISULFIX ANCHOR FOR FASTENING INSULATION
EASY FOAM GENERAL PURPOSE FOAM SEALANT	TO BRICKWORK
HERMETIC FOAM HIGH PERFORMING SOUNDPROOFING SEALING FOAM	ECO GLUE ADHESIVE GLUE FOR SEALING MEMBRANES
FIRE FOAM HIGH FIRE-RESISTANT SEALING FOAM	SUPERB GLUE HIGH ELASTICITY ADHESIVE GLUE
MS SEAL MS POLYMER HIGH ELASTICITY SEALANT	FOR SEALING MEMBRANES
FIRE SEALING ACRYLIC HIGH FIRE-RESISTANT ACRYLIC SEALANT	HIGH ELASTICITY UNIVERSAL ADHESIVE GLUE FOR EXTERNAL USE
FIRE SEALING SILICONE HIGH FIRE-RESISTANT SILICONE SEALANT	
NAIL PLASTER GEMINI HIGH-ADHESION NAIL POINT SEALANT TAPE126	
NAIL BAND BUTYL NAIL POINT SEALANT TAPE	
BUTYL BAND DOUBLE-SIDED UNIVERSAL BUTYL TAPE	
FIRE STRIPE INTUMESCENT THERMO-INFLATABLE ELEVIPLE CASKET 130	

I NODES AND FIELD OF APPLICATION

			ALU BAND	DOUBLE BAND	SEAL BAND SEAL SQUARE	EASY BAND	SPEEDY BAND	FLEXI BAND	FLEXI BAND UV	FACADE BAND UV	SOLID BAND	SMART BAND	PLASTER BAND	PLASTER BAND LITE	FRONT BAND UV 210	TERRA BAND	EXPAND BAND	WINDOW BAND	FRAME BAND	MEMBRANE GLUE	ECO GLUE	SUPERB GLUE	OUTSIDE GLUE	
		internal	v	V	v	v	v	v	v	v	v	v	v	~	v	v	v	V	v	v	v	v		
		external		v		v	v	v	v	v	v	v	v	√	v	v	v	√	v				✓	
	<u> </u>	foundation - wall																						
ODES	H	wall - wall			v	v	v	v	v	v	V	v	v		~	v	v	V	v	~	v	~	~	
STRUCTURAL NODES		slab - wall			v	v	v	v	v	v	V	v	v		v	v	v	~	v	~	v	v	~	
STRUC		beam - wall			V	v	~	v	~	v	~	v	V	v	~	v	~	~	~	~	V	v	V	
		girder - beam			~	~	v	v	v	v	✓	✓	✓	✓	~	v	~	✓	✓	✓	✓	√	✓	
SMC		door / wall frame - wall			~	~		~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	
DOORS/WINDOWS		skylight			v	v		v	V		v	v	v	v		v	v	~	v	~	v	v	~	
000		under-girder sealing									~	~	~											
	#	sealing nail point														v								
_	/ /	sealing membranes	v	~	~	~	~	~	~	~	~	~	~		~					~	~	~	~	
NGS		sealing by compression															~	√	✓					
SEALINGS		sealing that can be plastered											v	~										
_		sealing of technical installations and passages	v		~	~		~	~	~		~	~							~	~	~	~	
		chimneys and vents	√		√	✓		√	√	✓	v	√	√			v	✓	✓		√	√	✓	✓	

START BAND	LEVEL BAND	GROUND BAND	RADON FLOOR	TERMI FLOOR	BYTUM BAND	PROTECT	BYTUM SPRAY	BYTUM LIQUID	FLUID MEMBRANE	CONSTRUCTION SEALING	TIE BEAM STRIPE	EASY FOAM	HERMETIC FOAM	FIRE FOAM	MS SEAL	FIRE SEALING A	FIRE SEALING S	NAIL PLASTER GEMINI	NAIL BAND	BUTYL BAND	FIRE STRIPE	SUPRA BAND	ALU BUTYL BAND	BLACK BAND	MANICA PLASTER	MANICA FLEX	MANICA POST	TUBE STOPPER	АГРНА
v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
v	v	v	v	~	v	v	v	v	v	~	v	~	v	v	v	v	~	~	v	v	v	v	v	v	v	v		~	v
v	v	v	v	v	v	v	v	v	v		v												v	v					
✓	√				~	~	√	√	√	~	v	√	v	✓	~	v	~		v	√	~	✓	√	v	√				
~	v	v			~	~	✓	v	✓	~	~	~	~	~	~	~	~		~	✓	~	~	~	~	~				
v	v	v			v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	v	v	v				
v	v	v			v	v	v	v	v	v	v	v	v	v	~	~	~		v	v	v	v	v	v	v				
					~	~	~	~	✓	~		~	~	~	~	~	~			~	~	~	~	~	~				v
					v	~	v	v	v	v		v	v	v	~	~	~			v	v	v	v	v	v				v
v		v				v																			v				
																		~	v				~	~					
																				v		v							
v	v									v	v	v	v	v				~	v	v	v	v							
					~	v																			v				
					v	v	v	v	v			v	v	v	v	v	v				v			v	v	~	~	v	
					v	v	v	v	v			v	v	v	v	√	√				v		v	v	v	v	√		v

I SUPPORTS

	ALU BAND	DOUBLE BAND	SEAL BAND SEAL SQUARE	EASY BAND	SPEEDY BAND	FLEXI BAND	FLEXI BAND UV	FACADE BAND UV	SOLID BAND	SMART BAND	PLASTER BAND	PLASTER BAND LITE	FRONT BAND UV 210	TERRA BAND	EXPAND BAND	WINDOW BAND	FRAME BAND	
membrane with top PP layer		•	•	•	•	•	•	•	•	•	•	•	•	•		•		
membrane with top PE layer	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
membrane with top PA layer	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
membrane with top acrylate layer		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
bituminous membrane		•	•	•	•	•	•	•	•	•	•	•	•	•		•		
membrane with top aluminised layer	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
timber		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
rough OSB		•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	
sanded OSB	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
plaster, concrete and bricks	•	•		•		•	•	•		•	•	•		•		•		
plasterboard and plaster fibre	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
metal	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
timber fibre insulation	•	•		•		•		•		•		•		•	•	•	•	
mineral wool insulation	•	•		•		•	•	•		•		•		•	•	•	•	
polystyrene		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
PVC and plexiglass	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	

- excellent adhesion
- guaranteed adhesion with a few precautions (clean surfaces, pre-treated with primer and/or suitable application temperatures)
- poor adhesion

GROUND BAND	BYTUM BAND	PROTECT	BYTUM SPRAY	BYTUM LIQUID	FLUID MEMBRANE	EASY FOAM	HERMETIC FOAM	• FIRE FOAM	MS SEAL	FIRE SEALING ACRYLIC	FIRE SEALING SILICONE	NAIL PLASTER	NAIL BAND	BUTYL BAND	• FIRE STRIPE	SUPRA BAND	ALU BUTYL BAND	BLACK BAND	MANICA PLASTER	MANICA POST	MEMBRANE GLUE	ECO GLUE	SUPERB GLUE	OUTSIDE GLUE
•		•	•		•		•		•		•					•				•	•			•
																	_							
•	•	•	•		•		•		•		•	•	•		•	•	•	•	•	•	•	•	•	•
•	•	•	•		•		•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•		•		•		•	•	•		•	•	•	•	•		•		•	
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•		•	•
•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•	•	•		•		•		•	•	•		•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•
	•		•	•	•		•		•	•	•		•		•	•	•		•	•	•	•	•	•
	•		•	•	•		•		•	•	•		•		•	•	•		•	•	•	•	•	•
	•	•	•		•	•	•	•	•	•	•	•	•	•	•		•		•	•	•	•	•	•
•		•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	

BUTYL PRODUCTS


WHAT THEY ARE MADE OF AND WHERE THEY COME FROM

Butyl products are made from compounds of butyl rubber, a high-quality synthetic material with excellent elastic, thermal and durability properties.

The butyl product is a synthetic material obtained through a polymerisation reaction of molecules (monomers) from oil refining.

Rothoblaas offers: BUTYL BAND, SUPRA BAND, PROTECT, BLACK BAND, TERRA BAND UV, ALU BUTYL BAND, NAIL BAND, MANICA PLASTER, OUTSIDE GLUE, ALU FLASH CONNECT, SOFT FLASH CONNECT, MANICA ROLL.

REFINING TOWER












MONOMERS + CHEMICAL REACTION



Polymerisation is a chemical reaction which, starting from small simple molecules (monomers), produces a much longer so-called "polymer chain" consisting of identical molecules repeated in sequence. In this way it is possible to create materials with the desired properties.

PROPERTIES

Butyl is a material specially synthesised to achieve specific properties. It is particularly suitable for many applications in the construction industry, where adhesion, ageing resistance, stability at high temperatures and flexibility at low temperatures are key requirements. For these reasons, a butyl product is preferable to a bituminous product.



FLEXIBILITY

the chemical structure of these products makes them very flexible




HARDNESS

butyl products are specially designed for the desired application and do not require the addition of mineral fillers




RESISTANCE TO UV

this type of product is scarcely affected by ultraviolet radiation



AGEING

butyl compounds are very stable over time



ELASTICITY

butyl compounds are intrinsically elastic



THERMAL STABILITY

butyl products are stable over a very wide temperature range: -30 +90°C

BITUMINOUS PRODUCTS


WHAT THEY ARE MADE OF AND WHERE THEY COME FROM

Bitumen is a mixture of different substances, which is particularly suitable for combining with other materials to improve their mechanical and thermal properties.

Bitumen itself is a solid black mass which, in the case of tapes and membranes, is mixed with inorganic fillers (calcium carbonate and silica) and polymers to obtain a mix, possibly also adhesive, with the desired properties. Bitumen has two origins: a natural and an artificial one. What is used industrially is artificial bitumen.

Rothoblaas offers: BYTUM 400, BYTUM 750, BYTUM 1100, BYTUM 1500, BYTUM 2000, BYTUM BASE 2500, BYTUM SLATE 3500, SHINGLE, GROUND BAND, BYTUM BAND, BYTUM LIQUID, BYTUM SPRAY.

REFINING TOWER



NATURAL ASPHALT LAKE







BITUMEN + OILS + POLYMERS + MINERAL FILLERS




BITUMINOUS COMPOUND

Bituminous products are a mixture of different ingredients. Although bitumen is the major component, the final properties are more similar to those of the polymer (present in smaller quantities in the bituminous compound). A bit like mayonnaise, which is mostly made of oil but whose consistency is more like that of eggs, which are present in a smaller proportion. This is possible thanks to a special production process.


PROPERTIES

The properties of bituminous products depend on the presence of each "ingredient". The complex composition of bitumen influences its stability over time.



FLEXIBILITY

bitumen is very flexible; however, the presence of the mineral filler reduces its flexibility




HARDNESS

the hardness of the product is mainly due to the mineral fillers




UV RESISTANCE

the mineral part of the mixture protects it from ultraviolet radiation. Stone chips can cover the surface, protecting it




AGEING

bituminous products are more prone to ageing, which reduces its properties, and over time the oils in the bitumen tend to migrate



ELASTICITY

bitumen is a material with poor mechanical properties. For this reason it is modified by adding polymers such as SBS (styrene-butadiene-styrene)



THERMAL STABILITY

bitumen appears as a solid over a very narrow temperature range. The thermal stability range may vary depending on the ingredients added

I RADON, AN UNWANTED HOUSE GUEST



Radon is a noble radioactive gas that occurs in nature. It is highly volatile and tends to rise. It is odourless, making it difficult to perceive when concentrated inside of residences, and can have dangerous consequences if inhaled.

AN INSIDIOUS GAS



low high

CONCENTRATION

Map provided for illustrative purposes only. Always check for updates.

Radon is found throughout the Earth's crust, in varying quantities. Since it is a gas, it moves through openings in the ground, dispersing into the air or water. In the open it never reaches dangerous concentrations but, in closed areas (houses, offices, schools, etc.), it can arrive at values that create serious health risks. Threshold values are defined under international rules, which are then implemented by the relative national bodies.


WHERE IS IT FOUND?








A VERY DANGEROUS SUBSTANCE



This gas is found in the subsoil, in rock and in water. In the same way that it moves through the ground, it can pass through construction materials and enter the house. Proper airing out of rooms can be useful to fight accumulation, but is often insufficient.


As early as 1988, the World Health Organisation (WHO), through the International Agency for Research on Cancer (IARC), listed radon as a human carcinogen. Inhalation of radon gas increases the risk of health damage, in particular the risk of lung cancer.

HOW IT SPREADS



Radon becomes dangerous when it accumulates inside of the home. Today, with increased awareness of low energy consumption buildings (which increase airtightness) and the relative decrease in natural ventilation, the risk of radon is greater than ever.

THE IMPORTANCE OF GOOD DESIGN




It is possible to minimise the presence of radon in homes through the use of specific sheaths and materials designed to reduce the permeability of the outer structures and foundation of the building. The market offers a number of solutions. There are many solutions on the market, such as RADON FLOOR and GROUND BAND, foundation barriers that prevent radon from reaching indoor environments, eliminating health risks.


CONNECTION TO THE GROUND

The connection to the ground is undoubtedly one of the most delicate points in a timber construction, which is why it is essential to design and implement this construction detail carefully.


The proposed recommendations refer to the different national standards (DIN 68800-2, ÖNORM B 2320 and FLA guide) that promote passive node protection by ensuring the absence of water and moisture at the base of the building.

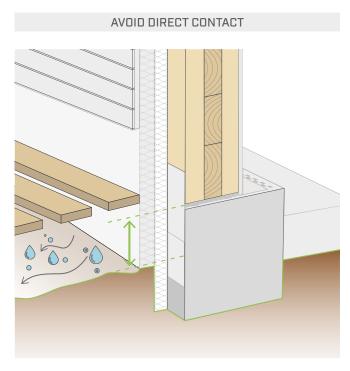

In order to avoid the contact of the base of the building with wet soil, the timber structure must be installed at a higher level than the water drainage.

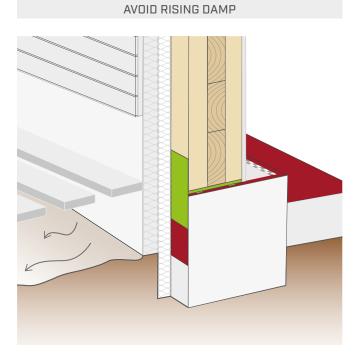

In order to prevent the migration of moisture from the concrete to the timber wall, an impermeable barrier must be placed between the concrete and the timber structure.

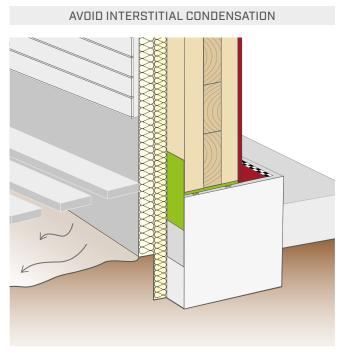

It is often one of the coldest points in the building, so it is important to solve the thermal bridge and ensure air tightness.

THE LAW OF THE 4 D

DEFLECTION

Rain deflection through design choices that tend to minimise the impact of rainwater on the casing (sloping roofs, eaves, flashings, etc.).

DRAINAGE

Design a drainage path with the aim of removing water from the building as quickly as possible (draining soil, slope layers, etc.).

DRYING

In properly designed buildings, water has a chance to evaporate and moisture can escape from the layers.

DURABLE MATERIALS

At those nodes that are not in line with the other 3 principles, the use of durable materials should be considered in the design.


GROUND CONNECTION WITH ALU START


CALCULATION OF THE THERMAL BRIDGE OF THE GROUND NODE WITH ALU START

With this study, several construction details involving the use of ALU START in the ground node were analysed.

	INTERNAL
CLIMATIC AND	T= 20°C
ENVIRONMENTAL	R.H.= 50%
CONDITIONS	R _{si} = 0.13 m ² W K ⁻¹

The analysis was carried out using a finite element node calculation programme in accordance with ISO 13788:2012.

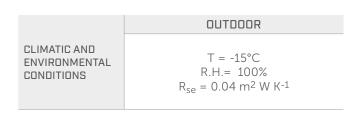

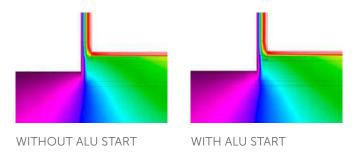


In this project, different configurations were studied and it was found that the temperature distribution is not significantly affected by the presence of ALU START.


INTERIOR WALL WITH ALU START

CLT (CROSS LAMINATED TIMBER) WITHOUT FOUNDATION **AERATION**

PERIMETER WALL WITH ALU START

CLT (CROSS LAMINATED TIMBER) WITHOUT FOUNDATION **AERATION**

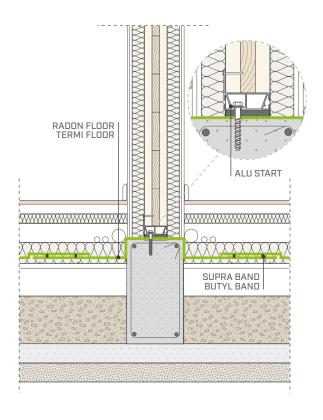

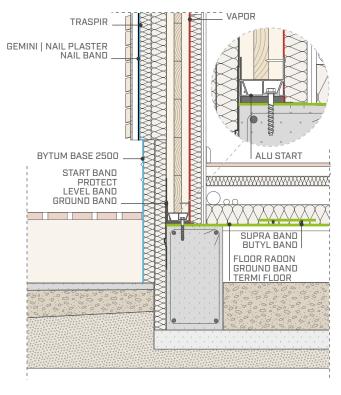

SEPARATING ELEMENTS TO MAKE THEM LIVE A LIFE TOGETHER



The ALU START profile eliminates contact between the timber panels and the concrete substructure, providing protection against rising damp and ensuring excellent durability of the building's ground connection. It is the first ground connection system that eliminates hold-downs and shear angles. Made of aluminium alloy, the ALU START system can be used with CLT or timber frame walls.



Scan the QR code and discover the technical features of ALU START







I START BAND

WATERPROOFING PROFILE WITH HIGH MECHANICAL RESISTANCE

ELASTICITY

Thanks to its elasticity, it is extremely easy to install even around corners and it is resistant to perforations or mechanical fastening.

DURABILITY

It is compatible with bitumen, it does not degrade and it is UV-resistant. It is resistant to walking wear and cold temperatures.

COMPOSITION

support EPDM-based synthetic rubber



START BAND ADHESIVE

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Tensile strength	DIN 53504	≥ 6,5 MPa	-
Resistance to tearing	DIN 53504	≥ 25 kN/m	≥ 2.86 lbf/in
Elongation	DIN 53504	≥ 300%	-
Dimensional tolerance	DIN 7715-5	conforming (class P3)	-
Reaction to fire	EN 13501-1	class E	-
Resistance to UV and resistance to ozone	DIN 7864-1	conforming	-
Water vapour resistance factor (μ)	EN 1931	32000	128 MN·s/g
Temperature resistance	-	-30 / +100 °C	-22 / +212 °F

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 17 02 03.

CODES AND DIMENSIONS

	CODE	В	s	L	В	S	L	
		[mm]	[mm]	[m]	[in]	[mil]	[ft]	
	START100	100	0,8	25	3.9	32	82	6
1	START150	150	0,8	25	5.9	32	82	4
ı	START200	200	0,8	25	7.9	32	82	3
	START250	250	0,8	25	9.8	32	82	2
2	STARTA120	120	0,6	20	4.7	24	66	6
	STARTA160	160	0,6	20	6.3	24	66	6

■ FIELDS OF APPLICATION









■ RELATED PRODUCTS



CUTTER page 328



PRIMER SPRAY page 102



HAMMER STAPLER 22 page 330



WIDE RANGE, INCLUDING ADHESIVE

Also available in an adhesive version (STAR-TA120 and STARTA160), ideal when applied in combination with ALU START, for an infallible connection to the ground.

SAFETY

It protects walls and foundation walls against rising damp over time, even at extreme temperatures. Also suitable as a general sealing wall barrier.

CONNECT BAND

SEALING WALL BARRIER FOR IRREGULAR **SUBSTRATES**

DOUBLE PROTECTION

It protects timber from rising damp and ensures excellent airtightness.

ADJUSTABLE

Adhesive PU foam profiles make it possible to compensate for any irregularities in the foundation.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Tensile strength	DIN 53504	≥ 6,5 MPa	-
Resistance to tearing	DIN 53504	\geq 25 kN/m ²	1713.04 lbf/ft
Elongation	DIN 53504	≥ 300%	-
Air permeability	EN 12114	α < 0,1 m ³ /(h·m·(daPa) ⁿ	-
Thermal conductivity (λ)	DIN 52612	0,042 W/m·K	0.02 BTU/h·ft·°F
Reaction to fire	EN 13501-1	class E	-
Resistance to UV and ozone	-	permanent	-
Water vapour resistance factor (μ)	EN 1931	approx. 32000	-
Watertightness	EN 13984	permanent	-
Temperature resistance	-	-30 / +100 °C	-22 / +212 °F
Application temperature	-	+5 / +35 °C	+41 / +95 °F
Storage temperature (1)	-	+1 / +25 °C	+33.8 / +77 °F
Solvents	-	no	-
VOC emissions	-	< 1 µg/m³	-

⁽¹⁾ Store the product in a dry, covered location.

CODES AND DIMENSIONS

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
CONNECT100	100	0,8	25	3.9	32	82	1
CONNECT250	250	0,8	25	9.8	32	82	1



WIDE RANGE

Available in two versions for use with different wall thickness values.

DURABLE TIGHTNESS

Extremely thermostable and flexible even at low temperatures. Compatible with bitumen and major building materials.

LEVEL BAND



SEALING WALL BARRIER FOR FOUNDATIONS

WATERPROOF

It effectively resists humidity due to capillary action, while offering excellent resistance to water, air and wind.

VERSATILE

Available in three versions: ideal both as a wall barrier and to seal vertical wall - wall joints.



1	Ø10 15 55 15	2	75	25
3	25 75	250		

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Maximum tensile force MD/CD	EN 12311-2	≥ 20 / ≥ 20 N/mm ²	≥ 2.9 / ≥ 2.9 lbf/mil ²
Elongation MD/CD	EN 12311-2	≥ 550 / ≥ 600 %	-
Resistance to nail tearing MD/CD	EN 12310-1	≥ 120 / ≥ 120 N/mm ²	≥ 17.4 / ≥ 17.4 lbf/mil ²
Watertightness	EN 1928	conforming	-
Reaction to fire	EN 13501-1	class E	-
Watertightness after artificial ageing	EN 1296 - EN 1931	conforming	-
Alkaline water vapour resistance	EN 1847 - EN 1931	conforming	-
Impact resistance	EN 12691	> 500 mm	-
Bendability at low temperatures	EN 495-5	-30 °C	-22 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 17 02 03.

CODES AND DIMENSIONS

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
1 LEVEL085	85	0,17	25	3.4	7	82	10
2 LEVEL125	125	0,17	25	4.9	7	82	2
3 LEVEL350	350	0,17	25	13.8	7	82	2



ADJUSTABLE

The soft and elastic polyethylene profile allows it to be installed even in complex shapes and angles.

COST-PERFORMANCE

The choice of materials and optimisation in production results in a solution that offers a good balance between performance and cost.

I GROUND BAND

SELF-ADHESIVE BITUMINOUS MEMBRANE







LOW TEMPERATURES

Can be installed at temperatures from +5 °C to +30 °C thanks to the special elastoplastomeric bituminous mixture. It remains flexible down to -30 °C.

SELF-SEALING AND SELF-ADHESIVE

Practical and fast installation, no flames are required, minimising risks for the wood.



COMPOSITION

release liner silicone coated paper

black adhesive bituminous compound

high density cross-laminated PE film

CODES AND DIMENSIONS

CODE	liner	В	s	L	liner	В	S	L	
	[mm]	[mm]	[mm]	[m]	[in]	[in]	[mil]	[ft]	
GROUND200	30 / 170	200	1,5	20	1.2 / 6.7	7.9	59	66	2
GROUND500	30 / 470	500	1,5	20	1.2 / 18.5	19.7	59	66	1
GROUND1000	500 / 500	1000	1,5	20	19.7 / 19.7	39.4	59	66	1



PROTECTION AGAINST RADON AND METHANE

The product is tested for protection against radon and methane gas, which are harmful to health in the case of high concentrations in indoor environments.

PRE-CUT LINER

All versions are supplied with the liner pre-cut to facilitate installation in corners or complex locations, but also over large areas to avoid excessive misalignment of the layers.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Maximum tensile force MD/CD	EN 12311-1	215 / 220 N/50 mm	-
Elongation at break point MD/CD	EN 12311-1 EN 12311-1	310 / 240%	
Impact resistance Met.A/Met.B	EN 12691	500 / 1000 mm	- 19.69 / 39.37 in
Static load resistance Met.A/Met.B	EN 12730	10 / 15 kg	350 / 530 oz
Resistance to tearing MD/CD	EN 12310-1	135 / 135 N	30.35 / 30.35 lbf
Joint separation resistance MD/CD	EN 12316-1	100 N/50 mm	11.42 lbf/in
Maximum tensile force MD/CD	EN 12317-1	300 / 250 N/50 mm	36.54 / 28.55 lbf/in
Initial Tack	ASTM D 2979	3,5 N	0.79 lbf
Adhesion on timber	ASTM D 1000	233 N/50 mm	26.61 lbf/in
Adhesiveness on concrete	ASTM D 1000	165 N/50 mm	18.84 lbf/in
Watertightness	EN 1928	≥ 60 KPa	-
Watertightness after ageing Met.A	EN 1296 / EN 1928	conforming	-
Water vapour resistance factor (μ)	EN 1931	approx. 110000	approx. 825 MN·s/g
Water absorption	ASTM D 570	0,09%	-
Resistance to hydrostatic pressure	DIN 52123	> 6 bar (24 h)	-
Reaction to fire	EN 13501-1	class E	-
Radon permeability	SP Swedish Nat. Testing & Research Institute	5,7·10 ⁻¹² m ² /s	-
Methane permeability	CSI test method	< 5 cc/m ² ·24·atm	-
Flexibility at low temperatures	EN 1109	-30 °C	-22 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Application temperature	-	-4 / +30 °C	+24.8 / +86 °F
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / +104 °F
Solvents	-	no	-
VOC emissions	ISO 16000	8 μg/m ³	-

(1) Store the product in a cool, dry place for no more than 12 months. The rolls must be transported and stored in a vertical position. It is recommended to store the product at room temperature until application, as it is sensitive to temperature changes. We recommend applying it during the cooler hours in summer and the warmer hours in winter, possibly with the help of a hot air gun. Waste classification (2014/955/EU): 17 03 02.

RELATED PRODUCTS



BYTUM LIQUID page 48



BLACK BAND page 136



ROLLER page 326



HAMMER STAPLER 47 page 330



SAFETY

The special elastoplastomeric bituminous compound and the cross-laminated high-density polyethylene backing film make the product completely waterproof and resistant to punching shear.

■ RECOMMENDATIONS FOR INSTALLATION

WATERPROOFING CLT WALL ON CONCRETE KERB

















- 1 HERON, HERON XL, HERON DGT, COSMOS, CHAMELEON, POWDER
- **3a** BYTUM LIQUID, BYTUM SPRAY, BRUSH
- **5** HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES





8 ROLLER

WATERPROOFING AND RADON PROTECTION OF FOUNDATIONS













I RADON FLOOR



WATERPROOFING RADON GAS BARRIER FOR **FOUNDATIONS**



COMPOSITION

top layer low density PE film

reinforcing layer polyester reinforcing grid

middle layer low density PE film

bottom layer low density PE film



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	350 g/m ²	1.15 oz/ft ²
Thickness	EN 1849-1	0.4 mm	16 mil
Water vapour transmission (Sd)	EN 1931	232 m	0.015 US perm
Maximum tensile force MD/CD	EN 12311-1	> 450 / 420 N/50mm	51 / 48 lb/in
Elongation MD/CD	EN 12311-1	> 12 / 12 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 300 / 300 N	> 67 / 67 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class F	-
Resistance to penetration of air	EN 12114	0 m ³ /(m ² h50Pa)	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,4 W/(m·K)	0.23 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 875 kg/m ³	approx. 0.51 oz/in ³
Water vapour resistance factor (μ)	-	approx. 580000	approx. 1160 MN·s/g
Joint strength	EN 12317-2	> 50 N/50mm	> 5.71 lb/in
Impact resistance	EN 12691	> 200 mm	> 7.87 in
Flexibility at low temperatures	EN 1109	-20 °C	-4 °F
Resistance to static load	-	200 N	44.96 lbf
Radon permeability	SP Swedish Nat. Testing & Research Institute	< 1x10 ⁻¹¹ m ² /s	-
Radon transmittance	SP Swedish Nat. Testing & Research Institute	< 2x10 ⁻⁸ m/s	-

Waste classification (2014/955/EU): 17 02 03.

CODE	Н	L	А	Н	L	А	
	[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
RADON350	2	25	50	7	82	538	42

■ RECOMMENDATIONS FOR INSTALLATION













- 1 SUPRA BAND, BUTYL BAND
- **3a** SUPRA BAND, BUTYL BAND, OUTSIDE GLUE ROLLER
- 4 MARLIN, CUTTER
- 5 GROUND BAND


I TERMI FLOOR



WATERPROOFING ANTI-TERMITE BARRIER FOR FOUNDATIONS



single layer low density PE film

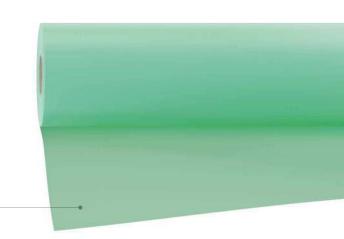

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	150 g/m ²	0.49 oz/ft ²
Thickness	EN 1849-1	0,15 mm	6 mil
Maximum tensile force MD/CD	EN 12311-1	15 / 15 N/50mm	2 / 2 lb/in
Elongation MD/CD	EN 12311-1	350 / 450 %	-
Resistance to nail tearing MD/CD	EN 12310-1	40 / 40 N	9 / 9 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class F	-
Resistance to penetration of air	EN 12114	$> 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	> 0.001 cfm/ft² at 50Pa
Thermal conductivity (λ)	-	0,4 W/(m·K)	0.23 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 1000 kg/m ³	approx. 0.58 oz/in ³
Impact resistance	EN 12691	200 mm	7.87 in
Resistance to static load	-	5 N	1.12 lbf
Water vapour resistance:			
- in the presence of alkalis	EN 1847 / EN 12311-2	conforming	-
- after artificial ageing	EN 1296 / EN 1931	conforming	-
Action against termites	FCBA (401/10/222F/d)	> 20 years	-

Waste classification (2014/955/EU): 17 02 04.

CODE	roll	Н	L	Α	Н	L	Α	
	[m]	[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
TERMI150	1,0 x 12,5	3	25	75	10	82	807	12

■ RECOMMENDATIONS FOR INSTALLATION

















- **3a** SUPRA BAND, BUTYL BAND, OUTSIDE GLUE
- 3b EASY BAND, SPEEDY BAND, FLEXY BAND, FLEXI BAND UV, PLASTER BAND, MANICA PLASTER
- OUTSIDE GLUE, SUPRA BAND, BUTYL BAND FLY, FLY SOFT
- 4b PRIMER, PRIMER SPRAY ROLLER

BYTUM BAND

SELF-ADHESIVE BITUMINOUS BAND, CAN BE PLASTERED



CAN BE PLASTERED

Polypropylene means the fabric can be plastered, offering greater versatility.

COST - PERFORMANCE

The bituminous mixture guarantees good adhesiveness, even on concrete.

COMPOSITION

release liner silicone coated paper

glue

black adhesive bituminous compound

support

non-woven PP fabric

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Maximum tensile force MD/CD	EN 12311-1	140 / 105 N	31.47 / 23.6 lbf
Elongation at break point MD/CD	EN 12311-1	100 / 100 %	-
Adhesion on concrete	ASTM D 1000	2,9 N/mm	16.56 lbf/in
Adhesion of class C2E cementitious glue on TNT	EN 12004 / EN 1348	0,9 N/mm ²	130.53 lbf/in ²
Reaction to fire	DIN 4102	class B2	-
Temperature resistance	-	-20 / +80 °C	-4 / +176 °F
Application temperature	-	+5 / +40 °C	+41 / +104 °F
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / +104 °F
VOC emissions	ISO 16000	8 μg/m ³	-

 $^{^{(1)}}$ Store the product in a cool, dry place for no more than 12 months.

It is recommended to store the product at room temperature until application, as it is sensitive to temperature changes. We recommend applying it during the cooler hours in summer and the warmer hours in winter, possibly with the help of a hot air gun. Waste classification (2014/955/EU): 17 03 02.

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
BYTBAND240	240	1	15	9.5	39	49	2
BYTBAND370	370	1	15	14.6	39	49	1







■ RELATED PRODUCTS



BYTUM LIQUID page 48



BYTUM SPRAY page 46



HAMMER STAPLER 22 page 330



VERY LOW EMISSIONS

Thanks to the special formulation of the bituminous compound, it guarantees health safety with regard to emissions.

SAFETY

It protects walls and foundation walls against rising damp over time. Also suitable as a general sealing wall barrier or window/door node waterproofing product.

I PROTECT









BUTYL MIX

The special mix guarantees excellent adhesion and deformation capacities, compensating for the natural movement of the timber.

LOW TEMPERATURES

The butyl guarantees excellent adhesion to the supports also under difficult environmental conditions.

COMPOSITION

release liner PP film

glue

grey adhesive butyl compound

support

non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Maximum tensile force MD/CD	EN 12311-1	115 / 100 N	25.85 / 22.48 lbf
Elongation at break point MD/CD	EN 12311-1	100 / 100 %	-
Peel adhesion at 180°	ASTM D 1000	20 N/cm	11.42 lbf/in
Initial Tack	ASTM D 2979	8 N	-
Resistance to tearing MD/CD	EN 12310	≥ 130 / ≥ 125 N	≥ 29.23 / ≥ 28.10 lbf
Joint separation resistance MD/CD	EN 12316-1	≥ 20 N/50 mm	≥ 2.28 lbf/in
Maximum tensile force MD/CD	EN 12317-1	≥ 100 / ≥ 75 N/50 mm	n ≥ 11.42 / ≥ 8.57 lbf/in
Adhesion of class C2E cementitious glue on TNT	EN 12004 / EN 1348	0,9 N/mm ²	130.53 lbf/in ²
Vertical sliding	ISO 7390	0 mm	-
Reaction to fire	EN 13501-1	class E	-
Temperature resistance	-	-30 / +90 °C	-22 / 194 °F
Watertightness	EN 1928	conforming	-
Water vapour resistance factor (μ)	EN 1931	approx. 26176	approx. 130 MN·s/g
Application temperature	-	0 / +40 °C	+32 / 104 °F
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / 104 °F
VOC emissions	ISO 16000	30 μg/m ³	-
French VOC classification	ISO 16000	A+	-

⁽¹⁾ Store the product in a cool, dry place for no more than 12 months.

It is recommended to store the product at room temperature until application, as it is sensitive to temperature changes. We recommend applying it during the cooler hours in summer and the warmer hours in winter, possibly with the help of a hot air gun. Waste classification (2014/955/EU): 08 04 10

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
PROTECT330	330	1	10	13.0	39	33	2
PROTECT500	500	1	10	19.7	39	33	1







■ RELATED PRODUCTS



MANICA PLASTER page 138

CODE	liner	В	s	L	liner	В	S	L	
	[mm]	[mm]	[mm]	[m]	[in]	[in]	[mil]	[ft]	
MANPLA2080	20 / 80	100	1	20	0.8 / 3.2	3.9	39	66	6
MANPLA20180	20 / 180	200	1	20	0.8 / 7.1	7.9	39	66	2



ADHESION

The special butyl mix ensures high adhesion even at low temperatures. Durable and thermally stable.

CAN BE PLASTERED

The non-woven polypropylene fabric means the support can be plastered, offering greater versatility of use.

BYTUM SPRAY

BITUMINOUS MEMBRANE SEALANT SPRAY

DURABLE PROTECTION

The product remains flexible and seals cracks and elements by blocking water and dust infiltration.

WEATHER RESISTANCE

The special elastomer-modified bituminous formula guarantees a product that after drying resists both weathering and salt corrosion.





TECHNICAL DATA

Properties	value	USC conversion
Colour	black	-
Time required for complete drying 23 °C / 50% RH	1 - 2 h	-
Yield	4 m ²	43.06 ft ²
Application temperature	+5 / +35 °C	+41 / +95 °F
Storage temperature ⁽¹⁾	+10 / +30 °C	+50 / +86 °F

⁽¹⁾Store the product in a dry, covered location for no more than 24 months. Check the expiry date on the packaging. Waste classification (2014/955/EU): 16 05 04. Aerosol 1. Skin Irrit. 2. STOT SE 3. Aquatic Chronic 2.

CODES AND DIMENSIONS

CODE	content	content	
	[mL]	[US fl oz]	
BYTS	500	16.90	12



UNIVERSAL

Suitable for all types of support, it adheres to all types of shapes including roofs, gutters, terraces, skylights, PVC or metal drainpipes.

FAST INSTALLATION

The product is supplied in a convenient resealable, ready-to-use spray which can be applied without the need for additional tools.

■ RECOMMENDATIONS FOR INSTALLATION

SEALING OF CRACKS AND CROSSING POINTS









BYTUM REINFORCEMENT

FASTENING SYSTEMS WATERPROOFING









| BYTUM LIQUID | REINFORCEMENT



SPREADABLE WATERPROOFING SHEATH | REINFORCING LAYER







■ TECHNICAL DATA

Properties	standard	value	USC conversion
Apparent volume mass of mix	EN 1015-6	1,5 kg/L	-
Maximum application thickness	-	3 mm	118 mil
Variable water vapour transmission (Sd)	EN 1931	5 / 50 m	0.7 / 0.07 US perm
Watertightness	EN 1928	> 500 kPa	-
Elongation MD/CD	EN 12311-1	240 %	-
Elongation with BYTUM REINFORCEMENT	EN 12311-1	80 %	-
Temperature resistance	-	-30 / 80 °C	-22 / 176 °F
Reaction to fire	EN 13501-1	class E	
Thermal conductivity (λ)	-	0,2 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	1500 J/(kg·K)	-
Flexibility at low temperatures	EN 1109	-10 °C	14 °F
Application temperature	-	5 / 35 °C	41 / 95 °F
Material yield per 1 mm thickness	-	1,5 kg/m ²	-
Crack bridging	EN 1602-7	> 2,5 mm	> 98 mil
Crack bridging with BYTUM REINFORCEMENT	EN 1602-7	> 10 mm	> 393 mil
Waiting time for:			
- complete hardening	-	4 days	-
- application of each layer on the previous one	-	24 hours	-
- covering with ceramics or paint	-	4 days	-
Static punching method A / method B	EN 12730	45 / 25 kg	-
Dynamic punching method A / method B	EN 12691	1000 / 1000 mm	-
Class and type	EN 14891	C PI-MC-IR / DM OP	-
Adhesives range for application of ceramic	EN 1015-6	C2 - S1 / S2	-

Waste classification (2014/955/EU): 08 04 16.

CODES AND DIMENSIONS

BYTUM LIQUID


CODE	content	content	
	[kg]	[lb]	
BYTL	10	22	50


BYTUM REINFORCEMENT

CODE	Н	L	А	Н	L	Α	
	[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
BYTR	1	50	50	3	164	538	24

■ RECOMMENDATIONS FOR INSTALLATION

WATERPROOFING OF WALL-TO-CEILING CORNERS

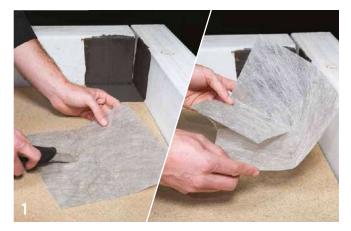

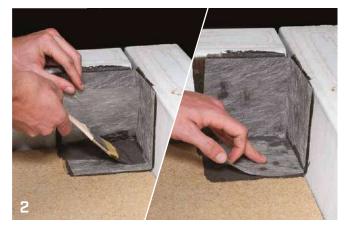











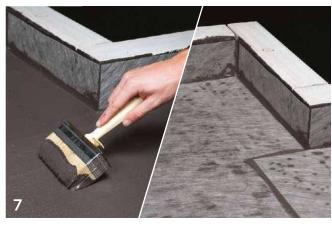

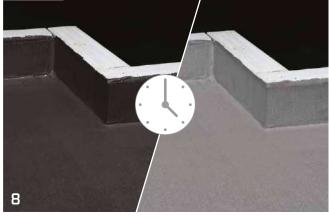

- 1 MARLIN, CUTTER
- 3 BRUSH

I FLUID MEMBRANE



SYNTHETIC SEALING MEMBRANE FOR BRUSH AND SPRAY APPLICATION

FLEXIBLE

The synthetic resin mix is elastic and resistant to any movement of the sealed cracks.

FAST INSTALLATION

It can be applied using a roller, brush or spray with the possibility of inserting a synthetic reinforcing fabric. Removable with hot water.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Colour	-	grey	-
Classification	EN 1504-2	PI-MC-IR ⁽¹⁾	-
Classification	EN 14891	DM 01 ⁽²⁾	-
Density at 20 °C	ISO 2811-1	1.45 kg/L	232,52 oz/gal
Surface cross-linking time 23 °C / 50% RH	-	4 h	-
Time required for complete drying 23 °C / 50% RH	-	24 h	-
Dry residue by mass	ISO 3251	65%	-
Dynamic viscosity	EN ISO 3219	48-72 Pa·s	-
Adhesion on concrete by direct traction	EN 1542	> 1 N/mm ²	145 lbf/in ²
Watertightness	EN 14891	conforming	-
Liquid water permeability (W)	EN 1062-3	$< 0.1 kg/m^2 \cdot h^{0.5}$	-
Water vapour transmission (Sd)	ISO 7783	< 5 m	> 0.7 US perm
Carbon dioxide permeability (C)	EN 1062-6	> 50 m	-
Application temperature	-	+5 / +35 °C	+41 / +95 °F
Storage temperature ⁽³⁾	-	≥ +5 °C	≥ +41 °F
VOC content	Dir. 2004/42/EC	0 g/L	-

⁽¹⁾ Principles. protection against penetration risks (H,I,C); moisture control (H,C); increasing resistivity by limiting moisture content (H,C). Types. H: Hydrophobic impregnation; I: Impregnation; C: Coating.

CODE	content	content	
	[kg]	[lb]	
FLUIDMEM	10	22	1

⁽²⁾Water based waterproofing product for liquid application in dispersion with improved crack bridging capability at -5 °C

⁽³⁾Store the product in a dry, covered location for no more than 24 months. Check the expiry date on the packaging. It is affected by frost. Waste classification (2014/955/EU): 08 04 16.







Airless pump specifications						
Capacity	\geq	3,6 L/min				
Nozzle	\geq	0,5 mm	0.02 in			
Tube length Φ 6,5 mm (0.25 in)	\leq	30 m	16 ft			
Maximum pump pressure	\geq	230 bar				





SAFETY

Resistant to water stagnation on the surface, even when there is no slope. Also suitable for surfaces in industrial areas or in sea areas. Odourless and non-toxic product. Solvent-free.

ADHERENCE

Thanks to its formulation, the product offers perfect adhesion, is suitable for complex construction details and resists micro-cracks.

I CONSTRUCTION SEALING

COMPRESSIBLE SEALING GASKET FOR REGULAR JOINTS

PRACTICAL

It can be applied during construction or during prefabrication for sealing timber-to-timber joints.

STABLE

Thanks to the solid EPDM mix, it endures over time. It is not affected by chemical attacks.

COMPOSITION

Extruded compact EPDM



■ TECHNICAL DATA


Properties	standard	value	USC conversion
Density	-	0,48 g/cm ³	0.28 oz/in ³
Compression deformation 22h +23 °C	EN ISO 815	< 25%	-
Compression deformation 22h +40 °C	EN ISO 815	< 35%	-
Temperature resistance	-	-35 / +100 °C	-31 / +212 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 17 02 03.

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
CONSTRU4625	46	3	25	1.8	118	82	3





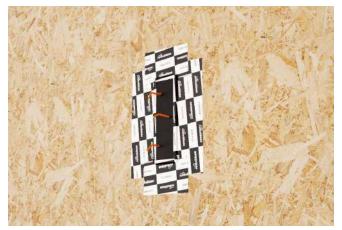

■ RELATED PRODUCTS



DOUBLE BAND page 62



MS SEAL page 120



HAMMER STAPLER 47 page 330



TESTED RESISTANCE

In Rothoblaas' experimental fire protection project it was tested for an El value.

NOISE REDUCTION

The acoustic performance has been tested in the Flanksound Project by Rothoblaas: using it as a wall gasket provides up to 3 dB of noise reduction.

I TIE-BEAM STRIPE

TIE BEAM SEALING PROFILE

ADJUSTABLE

Flexible profile is easy to work, thanks to the soft and shapeable mixture.

WATERPROOFING

Resilient profile to connect tie beam and brickwork/concrete.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
SHORE A hardness	EN ISO 868	50	-
Density	ASTM D 297	1,1 g/cm ³	0.64 oz/in ³
Compression deformation 22h + 100 °C	EN ISO 815	< 50%	-
Breaking load	EN ISO 37	≥ 9 MPa	-
Elongation at failure	EN ISO 37	≥ 500 %	-
Application temperature	-	-40 / +90 °C	-40 / +194 °F
Temperature resistance	-	-40 / +100 °C	-40 / +212 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 17 02 03.

CODES AND DIMENSIONS

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
TIEBEAM71	71	9	50	2.8	354	164	1




SMART

The pre-formed profile adapts well to surfaces, ensuring air and water tightness at all times. It can also be used vertically as a seal between walls.

STRENGTH

Its profile ensures great elasticity and resistance even in the event of perforations and mechanical fastening thanks to the special modified EPDM compound.

MORE ACOUSTIC COMFORT IN YOUR TIMBER HOUSE

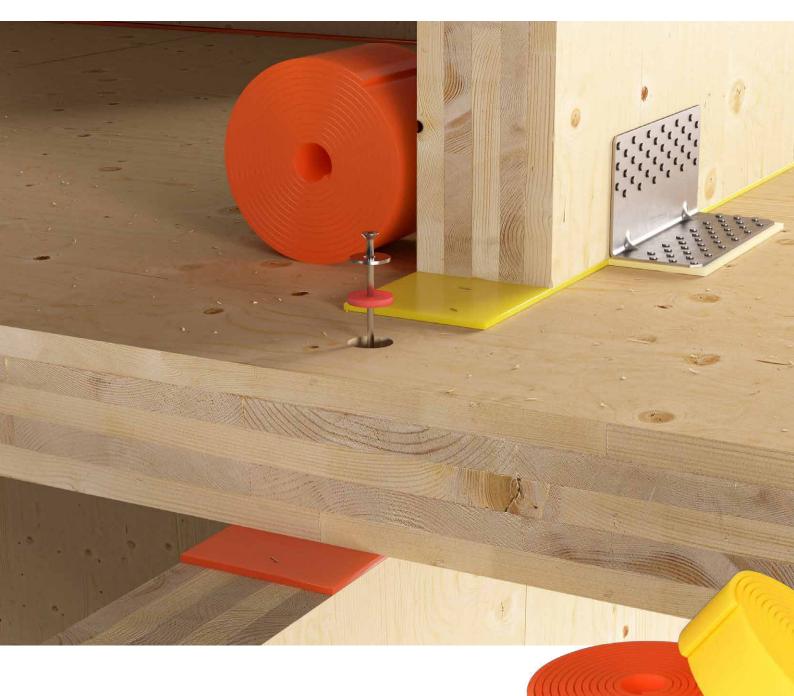

XYLOFON is the very high performance resilient profile that ensures acoustic comfort in timber structures and houses. Made of a polyure-thane compound, it is available in 5 versions from 35 to 90 shore, on the basis of the load it has to support. Tested and certified for use as a desolidarisation and mechanical interruption layer between building materials, it reduces the transmission of airborne and structural noise (up to more than 15 dB). Rely on the best performing acoustic profile on the market.

Scan the QR code and discover the technical features of XYLOFON







TAPES

HOW IS THE TAPE MADE?

RELEASE LINER: removable anti-adhesive layer that makes it possible to unwind the tape ADHESIVE: solvent-free adhesive mass REINFORCING LAYER: polymeric grid that provides strength and stiffness to the final product ADHESIVE: solvent-free adhesive mass PRIMER: layer that serves as a binder between the support and the adhesive **SUPPORT:** film to which the adhesive mix and the other components are applied

FINGERLIFT: part of the liner that sticks out in order to simplify its removal

INTERNAL CORE: cardboard or plastic cylinder around which the tape is wound

CHOOSE A SEALING PRODUCT OR TAPE



Examine the nature of the surfaces and their shape. Very irregular surfaces require more glue in order to activate the adhesion process.



Water, sudden temperature changes and exposure to UV rays may shorten the service life of the products. The best-performing products can remain functional even with a damp support surface.



It is necessary to analyse the mechanical stress to which the product will be subjected once it is working. During the application phase, it is important to reduce tension and elongation down to a minimum.



Prior to application, check to see whether any technical requirements must be complied with.



It is mandatory to comply with the final date, if indicated, within which the product has to be applied.

Keep the tapes in their original packing to avoid any direct exposure to sunlight and prevent any contact with dust and dirt. For storage, it is generally a good idea to ensure certain conditions are met: temperature between 5 and 25 °C, relative humidity below 65% and avoid extreme weather conditions and direct exposure to heat sources.


WHAT TYPE OF OUTE		DESCRIPTION AND SITURGE APPLICATION
WHAT TYPE OF GLUE?		PROPERTIES AND FIELD OF APPLICATION
ACRYLIC MIX IN AQUEOUS DISPERSION OR UV-CROSSLINKED	>	Suitable for smooth surfacesThermally stableUV stableElastic
BUTYL: HIGH PERFORMANCE SYNTHETIC POLYMER	>	 Suitable for very irregular and porous surfaces Deformable UV stable over time Thermally stable Effective at low temperatures
BITUMEN: SOLVENT-FREE OIL REFINING RESIDUE	>	Suitable for irregular surfacesDeformable
WHAT IS THE MOST APPROPRIATE MATERIAL?		PROPERTIES AND FIELD OF APPLICATION
NON-WOVEN PP FABRIC	>	Can be plasteredThermally stableFlexible
POLYETHYLENE FILM	>	WaterproofFlexible
EXPANDED POLYURETHANE FOAM	>	 Suitable to fill in cracks on irregular surfaces Rapid expansion (linked to weather conditions) Elastic over time Waterproof
CLOSED CELL POLYETHYLENE FOAM	>	Thermally stableChemically stableWaterproof
IMPREGNATED PAPER	>	WorkableThermally stable
EPDM	>	 High thermal stability High chemical stability Elasticity remains stable over time High mechanical strength and resistance to wear Waterproof
ALUMINIUM	>	UV-stableThermally stableHighly protective for the glueWaterproofDeformable

TAPE ADHESION

The function of the tape is to mechanically join two non-adhesive products together and to seal discontinuities on the surface (cracks, holes, etc.).

Special acrylic polymers are used in the production of construction tape glue to create pressure sensitive adhesives (PSA): adhesives that are able, when pressure is applied, to exploit the roughness of the surface to ensure adhesion.

The adhesion of a tape is influenced by the material of the surface to which it adheres, with which it establishes a chemical-physical interaction, by the roughness and viscosity of the material itself.

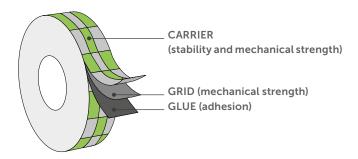


■ FACTORS INFLUENCING ADHERENCE

MATERIAL OF THE SUPPORT

The special chemical composition of the adhesive allows it to establish secondary interactions with the surface, based on a mechanism similar to that which allows a gecko to walk on window glass. This property significantly increases the adhesion of the tape.


SUPPORT ROUGHNESS



The adhesive is able to exploit the roughness of the surface by penetrating into the microporosity to create adhesion.

GLUE VISCOSITY

Another decisive aspect for adhesion is the glue viscosity. A very viscous glue will be less adhesive because it penetrates less into the microporosity of the surface. On the contrary, a less viscous glue will be more adhesive because it makes better use of surface roughness to increase the contact area. If the ambient temperature changes, the viscosity and adhesion of the glue will change.




Example of a very viscous glue. The red lines represent the contact area. Small contact surface.

Example of a low viscosity glue. The red line represents the contact area. Large contact surface.

GLUE

ADHESION




This is the force exerted between the glue and the surface to which the tape is glued. The adhesion required depends on the application. It is influenced by the support material and roughness.



Honey is an example of a very adhesive and not very cohesive material.

COHESION



This is the force acting within the glue, depending on the intensity of the interaction between the glue molecules. It must be high enough to reduce creep.






GLUE PROPERTIES

The adhesive properties of a tape are largely influenced by the glue. A good glue is characterised by:

- ability to quickly penetrate surface microporosities;
- balance of adhesion and cohesion forces;
- ability to maintain properties over time.

A mixture of materials is used to obtain this. Depending on which force prevails, an adhesive or cohesive fracture can be observed.

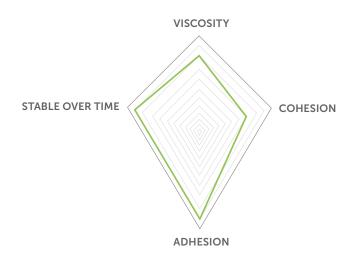

ADHESIVE FRACTURE

COHESIVE FRACTURE

In the case of building tapes, a cohesive fracture in the supports (membranes) is preferable as this exploits the maximum strength of the joint.




There is a separation between the two surfaces: glue cohesion > applied force > adhesion



Membrane fracture: adhesive strength and glue cohesion > applied force

TAPES AND DURABILITY

■ WEATHERING RESISTANCE TEST IN FLORIDA

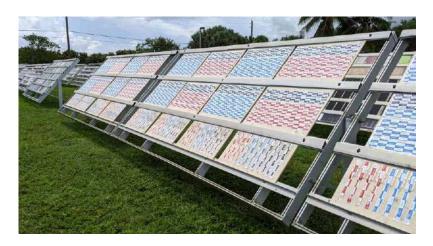

Florida is the only true subtropical region in the United States and is an internationally recognised site for outdoor weather exposure due to the synergistic effect of:

- presence of strong solar radiation
- prolonged exposure to UV radiation
- high temperatures throughout the year
- heavy rainfall
- · high humidity



$\mathbf{1}$ year of exposure in Florida $> \mathbf{1}$ year in the rest of the world

At regular intervals we carry out two tests, according to regulations, to check how much the exposure has changed the mechanical properties of the tapes:




EN ISO 29864

EN ISO 29862

HOW DOES TAPE DEGRADATION OCCUR?

Every material has its own sources of degradation.

UV rays, high temperatures, pollution and mechanical stresses affect the durability of the tapes by acting on polymers that compose them.



Each source of degradation listed above has a negative effect on the performance of the material. However, it is the sum of several degradation factors that represents the critical situation of the products durability.

1 SOURCE OF DEGRADATION



SUM OF SEVERAL SOURCES OF DEGRADATION



In the presence of multiple sources of degradation, performance decline occurs faster and more sharply.

ALU BAND

REFLECTIVE SINGLE-SIDED ADHESIVE TAPE FOR INDOOR USE

HEAT-RESISTANT UP TO 130°C

The combination of glue and aluminium carrier makes it possible to achieve very high thermal stability without compromising the glue adhesion and viscosity.

VERSATILE

Applicable on thermo-hydraulic structures, thanks to the high thermal reflectance and the glue that guarantees excellent adhesion.




■ TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN EN 1942	0,06 mm	2.4 mil
Tear strength	DIN EN 14410	> 25 N/cm	> 14.28 lbf/in
Expansion capacity	DIN EN 14410	> 5%	-
Adhesiveness	DIN EN 1939	> 8 N/cm	> 4.57 lbf/in
Water vapour transmission (Sd)	EN 1931	approx. 100 m	approx. 0.035 US perm
Watertightness	-	conforming	-
Reaction to fire	DIN 4102-1 EN 13501	class B1 class E	-
Temperature resistance	-	-40 / +130 °C	-40 / +266 °F
Application temperature	-	> -10 °C	> +14 °F
Storage temperature ⁽¹⁾	-	+15 / +30 °C	+59 / +86 °F
Solvents	-	no	-

 $^{^{(1)}}$ Store the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 17 09 04.

CODES AND DIMENSIONS

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
ALUBAND50	50	50	2.0	164	24
ALUBAND75	75	50	3.0	164	24

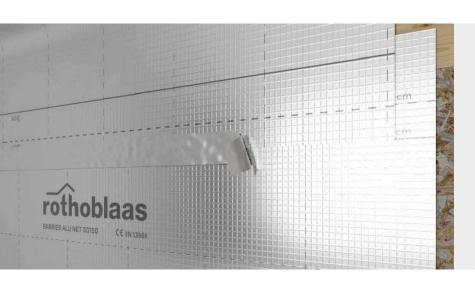

VAPOUR BARRIER

The aluminium carrier offers very high vapour protection and watertightness and is therefore ideal in combination with the BARRIER ALU line and in plant engineering applications.

I DOUBLE BAND

UNIVERSAL DOUBLE-SIDED TAPE

EXCELLENT ADHESION

The solvent-free acrylic glue mix ensures excellent adhesion on most common supports, even at low temperatures.

SECURE

In spite of the low thickness, the sealing will be secure thanks to the reinforcing grid.

COMPOSITION

release liner

silicone coated paper

alue

acrylic dispersion without solvents

reinforcing layer

polyester reinforcing grid

glue

acrylic dispersion without solvents



Properties	standard	value	USC conversion
Total thickness	DIN EN 1942	0,25 mm	10 mil
Adhesiveness	DIN EN 1939	≥ 25 N/25 mm	≥ 5.71 lbf/in
Temperature resistance	-	-30 / +100 °C	-22 / +212 °F
Application temperature	-	$-10 / +40 ^{\circ}\text{C}$ recommended > +5 $^{\circ}\text{C}$	+14 / +104 °F recommended > +41 °F
Watertightness	-	conforming	-
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 08 04 10.

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
DOUBLE40	40	50	1.6	164	8









■ RELATED PRODUCTS




page 132



ROLLER page 326



MARLIN page 328

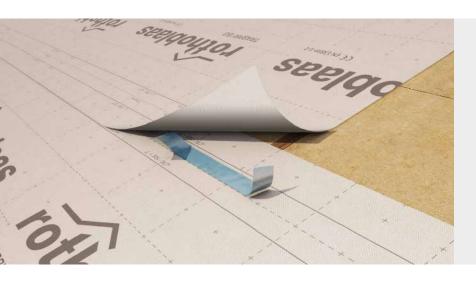

PERFECT INVISIBLE SEALING

DOUBLE BAND provides a perfect concealed seal and offers weather protection and durability.

TEMPERATURE RESISTANCE

Thanks to its special formulation, the acrylic glue ensures excellent stability against temperature ranges.

| SEAL BAND | SEAL SQUARE









SINGLE-SIDED TAPE FOR INDOOR USE

EFFECTIVE

The pre-shapeable carrier allows efficient sealing of concave or convex corners and edges.

SQUARE VERSION

Ideal for small point seals or holes for the blowing technique, where precision is required.

COMPOSITION

support

paper reinforced with protective film

alue

acrylic dispersion without solvents

release liner

silicone coated paper



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	EN 1942	0,33 mm	13 mil
Adhesiveness	EN 1939	35 N/25 mm	8 lbf/in
Water vapour transmission (Sd)	EN ISO 12572	6 m	0.58 US perm
Temperature resistance	-	-40 / +100 °C	-40 / +212 °F
Application temperature	-	-10 / +40 °C	+14 / +104 °F
Storage temperature ⁽¹⁾	-	+15 / +25 °C	+59 / +77 °F
VOC emissions	EN 16516	< 5 μg/m ³	
French VOC classification	ISO 16000	A+	-
Emicode	GEV test procedure	EC1 plus	-

 $[\]ensuremath{^{(1)}}\mbox{Store}$ the product in a dry, covered location.

CODES AND DIMENSIONS


SEAL BAND

CODE	liner	В	L	liner	В	L	
	[mm]	[mm]	[m]	[in]	[in]	[ft]	
SEAL60	60	60	25	2.4	2.4	82	10
SEAL1248	12 / 48	60	25	0.5 / 1.9	2.4	82	10
SEAL3030	30 / 30	60	25	1.2 / 1.2	2.4	82	10

SEAL SQUARE

CODE	В	Н	L	В	Н	L	pcs/roll	
	[mm]	[mm]	[m]	[in]	[in]	[ft]		
SEAL180	180	180	36	7.1	7.1	118	200	1

Waste classification (2014/955/EU): 08 04 10.

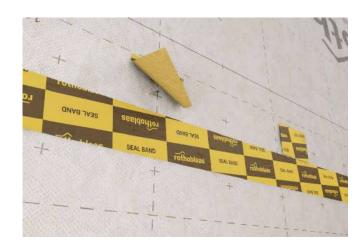







■ PRODUCT RANGE



SEAL60



SEAL1248



SEAL3030



SEAL180



FAST INSTALLATION

Versions with pre-cut liner are available for quick and easy installation.


SECURE

Reinforced paper support, ideal for indoor use; airtightness guaranteed over time.

■ RECOMMENDATIONS FOR INSTALLATION

CORNER DETAIL



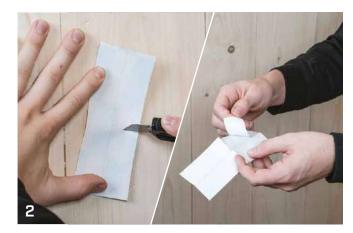













- 2 MARLIN, CUTTER
- ROLLER

BEAM SEAL DETAIL










- 1 MARLIN, CUTTER
- 3 ROLLER

WINDOW HOLE SEALING DETAIL



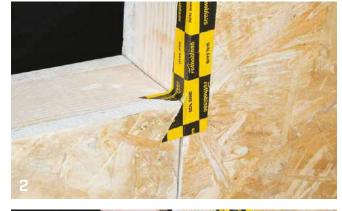



- 1 MARLIN, CUTTER
- 4 ROLLER

EASY BAND





D DIN 4108-11



UNIVERSAL SINGLE-SIDED TAPE

VERSATILE

Progress adhesion, stable over time, for the most common supports.

INDUSTRIAL USE

Adhesive mix and available versions also designed for prefabrication.

COMPOSITION

support PE film

glue

acrylic dispersion without solvents

reinforcing layer

polyester reinforcing grid

acrylic dispersion without solvents

release liner


silicone coated paper


■ TECHNICAL DATA


Properties	standard	value	USC conversion
Total thickness	-	0,28 mm	11 mil
Adhesiveness	EN 1939	> 35 N/25 mm	8 lbf/in
Water vapour transmission (Sd)	EN ISO 12572	40 m	0.09 US perm
UV resistance	-	4 months	-
Application temperature	-	-10 / +100 °C	+14 / +212 °F
Temperature resistance	-	-40 / +100 °C	-40 / +212 °F
Storage temperature ⁽¹⁾	-	+15 / +25 °C	+59 / +77 °F
Solvents	-	no	-
VOC emissions	EN 16516	55 μg/m ³	
French VOC classification	ISO 16000	A+	-
Emicode	GEV test procedure	EC1 plus	-

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 08 04 10.

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
EASY50	50	25	2.0	82	12
EASY60	60	25	2.4	82	10

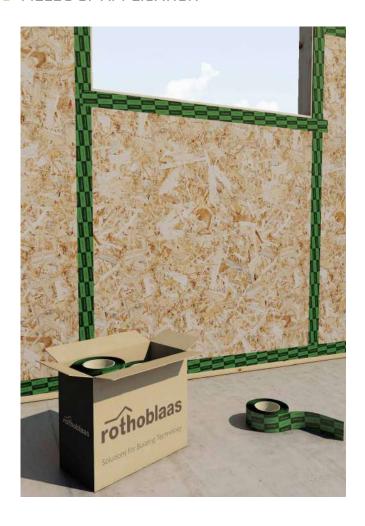

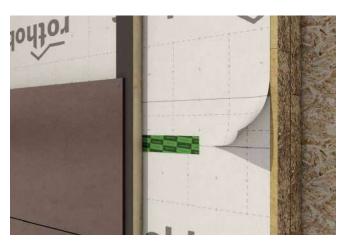

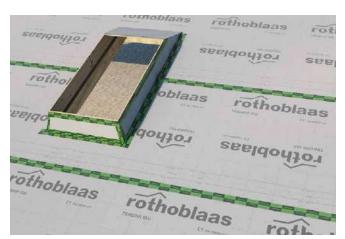

RELATED PRODUCTS




page 102



PRIMER page 103



CUTTER page 328

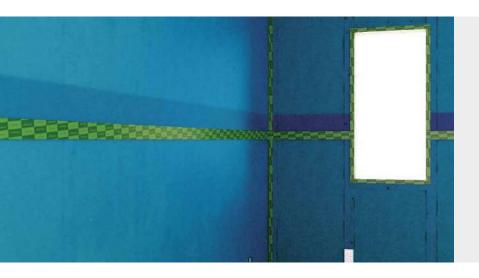

PERFORMANCE COST

The packaging and the mix of glue and carrier made it possible to obtain a very good product at a low cost.

ALSO FOR WARM CLIMATES

The type of glue, its quantity and the choice of carrier make this tape suitable for sealing on smooth surfaces and at high temperatures, preventing the tape from slipping in all those situations where the glue generally tends to soften.

I SPEEDY BAND





UNIVERSAL SINGLE-SIDED TAPE WITHOUT RELEASE LINER

FAST INSTALLATION

Can be used both externally and internally, guarantees fast and secure sealing on the most common supports.

SUSTAINABLE

The lack of a release film means less waste to dispose of.

COMPOSITION

support PE film

glue

solvent-free UV-crosslinked acrylic

reinforcing layer

polyester reinforcing grid

glue

solvent-free UV-crosslinked acrylic

■ TECHNICAL DATA


Properties	standard	value	USC conversion
Total thickness	AFERA 5006	0,245 mm	10 mil
Adhesiveness on steel	AFERA 5001	≥ 25 N/25 mm	≥ 5.71 lbf/in
Adhesiveness on polyethylene	EN 12316-2	≥ 12,5 N/25 mm	≥ 2.86 lbf/in
Tear strength	EN 12317-2	≥ 90 N/50 mm	≥ 10.28 lbf/in
Water vapour transmission (Sd)	EN 1931	40 m	0.09 US perm
UV resistance	-	6 months	-
Watertightness	-	conforming	-
Application temperature	-	-10 / +30 °C	+14 / +86 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +30 °C	+41 / +86 °F
Solvents	-	no	-
French VOC classification	ISO 16000	A+	-

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 08 04 10.

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
SPEEDY60	60	25	2.4	82	10
SPEEDY300	300	25	11.8	82	2





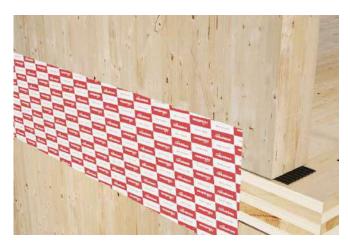



■ RELATED PRODUCTS



RANGE







SPEEDY300



EASY TEAR

It can be easily torn off thanks to the serrated edges that facilitate directional breaking of the tape without the use of scissors or cutters.

UNIVERSAL

Speed and good adhesion strength on most common building materials.

| FLEXI BAND











UNIVERSAL SINGLE-SIDED HIGH-ADHESIVE TAPE

UNIVERSAL

Excellent initial tack and superior adhesion strength on any surface.

HIGH PERFORMANCE

Guaranteed adhesion over time, even on dusty, porous or damp surfaces.

COMPOSITION

support PE film

glue

acrylic dispersion without solvents

reinforcing layer

reinforcing polyester grid

glue

acrylic dispersion without solvents

release liner

silicone coated paper

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN EN 1942	0,34 mm	13 mil
Tear strength	DIN EN 14410	≥ 50 N/25 mm	≥ 11.42 lbf/in
Expansion capacity	DIN EN 14410	20%	-
Adhesiveness	DIN EN 1939	≥ 30 N/25 mm	≥ 6.85 lbf/in
	EN 1931	approx. 45 m	-
Water vapour transmission (Sd)	ACTM FOC (-1	6,27 ng/(m ² ·24h)	-
	ASTM E96 (dry cup)	0.11 US perm	
UV resistance		6 months	-
Application temperature		-10 / +40 °C	+14 / +104 °F
Temperature resistance		-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾		+5 / +25 °C	+41 / +77 °F
VOC content		23 μg/m ³	-
Emicode	GEV test procedure	EC1 plus	-

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 08 04 10.

CODE	liner	В	L	liner	В	L	
	[mm]	[mm]	[m]	[in]	[in]	[ft]	
FLEXI60	60	60	25	2.4	2.4	82	10
FLEXI100	100	100	25	3.9	3.9	82	6
FLEXI5050	50 / 50	100	25	2.0 / 2.0	3.9	82	6
FLEXI7575	75 / 75	150	25	3.0 / 3.0	5.9	82	4







■ PRODUCT RANGE







FLEXI100



FLEXI5050



FLEXI7575 fingerlift



VERY LOW EMISSIONS

Thanks to the special formulation of the acrylic glue, the tape achieves the highest level of safety against harmful emissions.

ALSO AT LOW TEMPERATURES

The combination of carrier and acrylic dispersion glue is designed for good adhesion even in extremely cold temperatures.

I FLEXI BAND UV

UNIVERSAL SINGLE-SIDED ADHESIVE TAPE WITH HIGH UV STABILITY AND HEAT RESISTANCE

UV STABILITY AND AGEING

The special carrier is designed to offer excellent UV stability, while maintaining mechanical and adhesion properties over time due to excellent ageing resistance.

HEAT-RESISTANT UP TO 120°C

The combination of glue and polypropylene carrier makes it possible to achieve very high thermal stability without compromising the glue adhesion and viscosity.

COMPOSITION

support PP film

glue

acrylic dispersion without solvents

reinforcing layer

reinforcing polyester grid

glue

acrylic dispersion without solvents

release liner

silicone coated paper

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	-	0,33 mm	13 mil
Tear strength	EN ISO 527	70 N/10mm	40 lbf/in
Expansion capacity	EN ISO 527	500%	-
Adhesiveness	EN 1939	> 35 N/25 mm	> 8 lbf/in
Water vapour transmission (Sd)	EN 1931	20 m	0.17 US perm
Water vapour resistance factor (μ)	EN 1931	28500	47.03 MN·s/g
UV resistance	-	12 months	-
Application temperature	-	> -10 °C	> +14 °F
Temperature resistance	-	-40 / +120 °C	-40 / +248 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-
VOC emissions	ISO 16000	130 μg/m ³	-


⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
FLEXIUV60	60	25	2.4	82	10





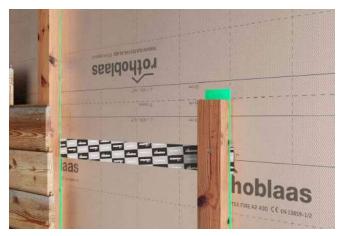

■ RELATED PRODUCTS






ROLLER page 326



CUTTER page 328

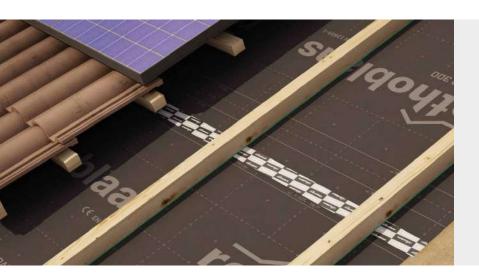

FLEXIBILITY

The carrier is made of a special copolymer mix that ensures high elasticity and deformation capacity for the most difficult details without reducing mechanical strength.

SPECIAL GLUE

The solvent-free acrylic glue mix ensures excellent adhesion on most common supports. In addition, it is extremely stable at high temperatures so that it does not extend at the tape edges and create problems during transport and installation.

I FACADE BAND UV

UNIVERSAL SINGLE-SIDED TAPE, RESISTANT TO UV RAYS

UV STABILITY

Ideal for façade sealing and for overlapping on UV-ray resistant membranes.

INVISIBLE

Developed for application on TRASPIR for façade and TRASPIR EVO 300 for excellent aesthetic performance.

COMPOSITION

support PP film

acrylic dispersion without solvents

reinforcing layer

reinforcing polyester grid

acrylic dispersion without solvents

release liner

silicone coated paper

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	EN 1942	0,32 mm	12.6 mil
Tear strength	EN ISO 527	70 N/10 mm	40 lbf/in
Elongation at failure	EN ISO 527	500%	-
Adhesiveness	EN 1939	35 N/25 mm	8 lbf/in
Water vapour transmission (Sd)	EN 1931	20 m	0.17 US perm
Water vapour resistance factor (µ)	EN 1931	28500	47.03 MN·s/g
Watertightness	-	conforming	-
UV resistance with joints up to 50 mm wide exposing up to 40% of the surface	-	permanent	-
UV resistance	-	12 months	-
Temperature resistance	-	-40 / +120 °C	-40 / +248 °F
Application temperature	-	> -10 °C	> +14 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
VOC emissions	ISO 16000	130 μg/m ³	-


⁽¹⁾ Store the product in a dry, covered location. Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
FACADEUV60	60	25	2.4	82	10





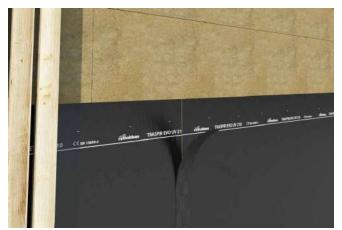

■ RELATED PRODUCTS



TRASPIR EVO UV 115 page 254



THERMOWASHER page 145



DGZ page 144



SAFETY

High adhesion even at high and low temperatures, for a secure, airtight fastening.

HEAT-RESISTANT UP TO 120°C

The combination of glue and polypropylene carrier makes it possible to achieve very high thermal stability without compromising the glue adhesion and viscosity.

SOLID BAND



ROBUST SINGLE-SIDED ADHESIVE TAPE SUITABLE FOR LOW TEMPERATURES

VERSATILE

It can be supplied with either a pre-cut or full liner, making it suitable for sealing concave or convex parts with great precision.

EXTREMELY STRONG

The special modified polymer carrier ensures high resistance to mechanical stress without deformation during use.

COMPOSITION

support PP film

glue

acrylic dispersion without solvents

release liner

silicone coated paper



■ TECHNICAL DATA


Properties	standard	value	USC conversion
Thickness	-	0,24 mm	9.5 mil
Adhesion to OSB	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Adhesion to steel	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Adhesion to vinyl	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Adhesion to plywood	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Adhesion to its cladding material	ASTM D3330	2,6 N/10mm	≥ 1.48 lbf/in
Elongation at failure	ASTM D 1000	≥ 400 %	-
Water vapour transmission (Sd)	-	> 18 m	< 0.19 US perm
UV-resistant	-	3 months	-
Tightness in heavy rain	-	conforming	-
Application temperature	-	-18 / +40°C	-0.4 / +104 °F
Temperature resistance	-	-30 / +80 °C	-22 / +176 °F
Storage temperature	-	+5 / +30 °C	+41 / +86 °F

Waste classification (2014/955/EU): 08 04 10.


CODES AND DIMENSIONS

CODE	liner	В	L	liner	В	L	
	[mm]	[mm]	[m]	[in]	[in]	[ft]	
SOLID60	60	60	25	2.4	2.4	82	10
SOLID3030	30 / 30	60	25	1.2 / 1.2	2.4	82	10



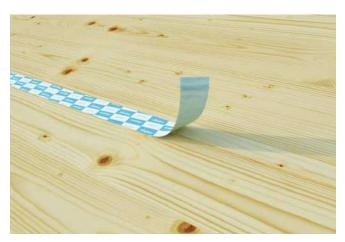



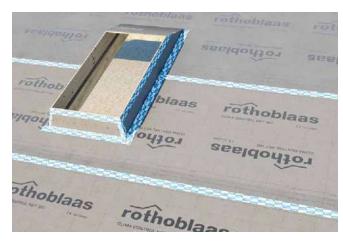

PRODUCT RANGE







LOW TEMPERATURES -18°C

It has excellent adhesion at low temperatures without the need for primer or heating.



PRE-SHAPEABLE

The special mix of the support ensures high workability even in extremely harsh environmental conditions, allowing the pre-cut liner to be pre-bent and removed as desired.

I SMART BAND



UNIVERSAL SINGLE-SIDED TAPE WITH SEPARABLE LINER

SPECIAL LINER

The product has a unique separating film which, thanks to a special treatment, can be divided at any point without pre-cutting, thus adapting to any installation requirement.

FLASHING TAPE

It meets all the requirements to be classified as a tape for sealing external doors or windows, ensuring maximum safety even in case of stagnating water.

COMPOSITION

support

PE special film

support

UV-stabilised PE film

alue

acrylic dispersion without solvents

release liner

PP film with easy splitting

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Thickness	-	0,24 mm	9.5 mil
Adhesion to OSB	ASTM D3330	≥ 5 N/10mm	≥ 2.86 lbf/in
Adhesion to steel	ASTM D3330	≥ 12 N/10mm	≥ 6.85 lbf/in
Adhesion to vinyl	ASTM D3330	≥ 5 N/10mm	≥ 2.86 lbf/in
Adhesion to plywood	ASTM D3330	≥ 5 N/10mm	≥ 2.86 lbf/in
Adhesion to its cladding material	ASTM D3330	≥ 10 N/10mm	≥ 5.71.86 lbf/in
Tensile strength	ASTM D 1000	3000 N/mm	17.13 lbf/mil
Elongation at failure	ASTM D 1000	≥ 400 %	-
Water vapour transmission (Sd)	-	> 18 m	< 0.19 US perm
UV-resistant	-	12 months	-
Tightness in heavy rain	-	conforming	-
Application temperature	-	-10 / +40°C	+14 / +104 °F
Temperature resistance	-	-30 / +80 °C	-22 / +176 °F
Storage temperature	-	+5 / +30 °C	+41 / +86 °F

In order to measure adhesion, it was necessary to avoid stretching by applying another tape to the support. Waste classification (2014/955/EU): 08 04 10.

■ CODES AND DIMENSIONS

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
SMART60	60	25	2.4	82	10
SMART75	75	25	3.0	82	8
SMART100	100	25	3.9	82	6
SMART150	150	25	5.9	82	4







■ PRODUCT RANGE







SMART75



SMART100



SMART150



PUNCTURE RESISTANT

The special composition of the support makes it particularly resistant to tearing and mechanical stress, thanks to its high deformability.

SMART

The tape is unique and extremely versatile. Thanks to the easy-splitting liner, only a few sizes can be stored to meet any construction requirement.

■ RECOMMENDATIONS FOR INSTALLATION

WINDOW HOLE SEALING

















- 3 MARLIN, CUTTER
- 5 HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES

















I PLASTER BAND

SPECIAL HIGH-ADHESION TAPE, CAN BE ALSO PLASTERED

EXCELLENT ADHESIVENESS

Its excellent adhesiveness makes it ideal for application on most surfaces, even at low temperatures.

CAN BE PLASTERED

Thanks to its special composition, it controls the flow of vapour perfectly and also guarantees a perfect airtightness.

COMPOSITION

support


breathable 2-layer PP membrane

adhesive

acrylic dispersion without solvents

release liner

silicone coated paper

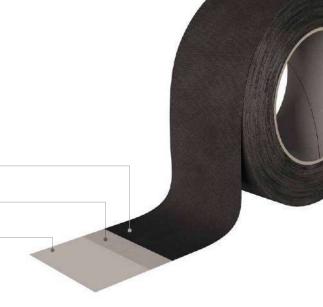

CODESANDDIMENSIONS

PLASTER BAND

CODE	liner	В	t	Т	L	liner	В	L	
	[mm]	[mm]	[mm]	[mm]	[m]	[in]	[in]	[ft]	
1 PLASTER60	60	60	_	60	25	2.4	2.4	82	10

PLASTER BAND IN

	CODE	liner	В	t	Т	L	liner	В	L	
		[mm]	[mm]	[mm]	[mm]	[m]	[in]	[in]	[ft]	
	PLASTIN1560	15 / 60	75	-	75	25	0.6 / 2.4	3.0	82	5
2	PLASTIN1585	15 / 85	100	-	100	25	0.6 / 3.4	4.0	82	4
	PLASTIN15135	15 / 135	150	-	150	25	0.6 / 5.3	5.9	82	2
	PLASTIN7520	75	75	20	75	25	3.0	3.0	82	5
3	PLASTIN10020	100	100	20	100	25	3.9	3.9	82	4
	PLASTIN15020	150	150	20	150	25	5.9	5.9	82	2

PLASTER BAND OUT

	CODE	liner	В	t	Т	L	liner	В	L	
		[mm]	[mm]	[mm]	[mm]	[m]	[in]	[in]	[ft]	
	PLASTOUT1560	15 / 60	75	-	75	25	0.6 / 2.4	3.0	82	5
2	PLASTOUT1585	15 / 88	100	-	100	25	0.6 / 3.4	4.0	82	4
_	PLASTOUT15135	15 / 135	150	-	150	25	0.6 / 5.3	5.9	82	2
	PLASTOUT15185	15 / 185	200	-	200	25	0.6 / 7.3	7.9	82	2
	PLASTOUT7520	75	75	20	75	25	3.0	3.0	82	5
2	PLASTOUT10020	100	100	20	100	25	3.9	3.9	82	4
3	PLASTOUT15020	150	150	20	150	25	5.9	5.9	82	2
	PLASTOUT20020	200	200	20	200	25	7.9	7.9	82	2










RANGE

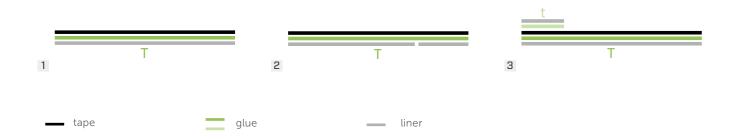



RESISTANT SEPARATION FILM

The PP liner allows the tape to be applied even in tight spaces and corners, avoiding the risk of the tape breaking when it is removed.

EASY INSTALLATION AND AESTHETIC PERFORMANCE

The pre-cut liner allows for precise and fast application with a high level of aesthetics and the possibility of perfectly concealing the tape behind claddings or plaster.

I PLASTER BAND IN

COMPOSITION support 2-layer PP vapour control membrane adhesive acrylic dispersion without solvents release liner easy-release PP film

COMPOSITION

support 2-layer PP vapour control membrane adhesive acrylic dispersion without solvents release liner easy-release PP film



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN 53855	0,5 mm	20 mil
Mass per unit area	EN 1848-2	300 g/m^2	113.9 oz/ft ²
Water vapour transmission (Sd)	EN 1931	> 10 m	< 0.35 US perm
Maximum tensile force MD/CD	EN 12311-1	115 / 75 N/50 mm	13.13/8.57 lbf/in
Elongation MD/CD	EN 12311-1	75 / 80%	-
Watertightness	EN 13984	W1	-
Tightness in heavy rain	EN 1027	≥ 1050 Pa	-
Air permeability	EN 1026	$\leq 0.1 \mathrm{m}^3/(\mathrm{h}\cdot\mathrm{m}\cdot(\mathrm{daPa})^{2/3}$	-
UV-resistant	-	3 months	-
Reaction to fire	EN 13501-1	class E	-
Application temperature	-	> +5 °C	> +41 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-
Emicode	GEV test method	EC1 plus	-

⁽¹⁾ Store the product in a dry, covered location for no more than 24 months. Waste classification (2014/955/EU): 08 04 10.

I PLASTER BAND OUT

COMPOSITION

support


breathable 2-layer PP membrane

adhesive

acrylic dispersion without solvents

release liner

easy-release PP film

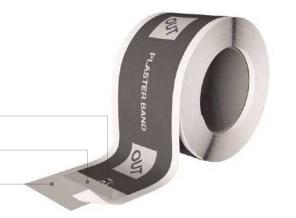

COMPOSITION

support


breathable 2-layer PP membrane

adhesive

acrylic dispersion without solvents

release liner

easy-release PP film

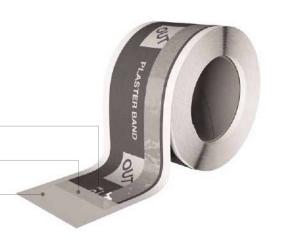


■ TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN 53855	0,7 mm	28 mil
Mass per unit area	EN 1848-2	360 g/m ²	-
Water vapour transmission (Sd)	EN 1931	< 1 m	> 3.5 US perm
Maximum tensile force MD/CD	EN 12311-1	290 / 190 N/50 mm	-
Elongation MD/CD	EN 12311-1	75 / 135%	-
Watertightness	EN 13984	W1	-
Tightness in heavy rain	EN 1027	≥ 1050 Pa	-
Air permeability	EN 1026	$\leq 0.1 \text{ m}^3/(\text{h}\cdot\text{m}\cdot(\text{daPa})^{2/3}$	-
UV-resistant	-	12 months	-
Reaction to fire	EN 13501-1	class E	-
Application temperature	-	> -10 °C	> +14 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-
Emicode	GEV test method	EC1 plus	-

⁽¹⁾ Store the product in a dry, covered location for no more than 24 months. Waste classification (2014/955/EU): 08 04 10.

■ RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND IN

APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

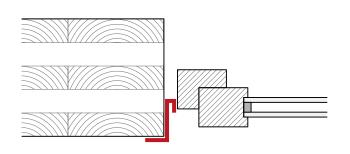
















7 ROLLER

■ RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND IN

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

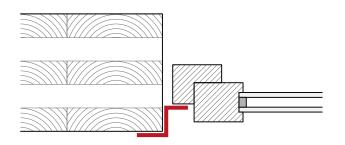















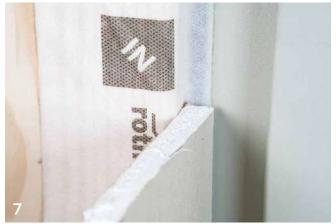

■ RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND OUT

APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

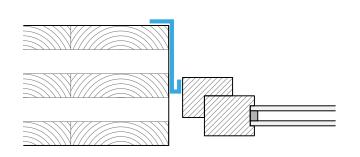
















4 EXPAND BAND, WINDOW BAND, FRAME BAND

■ RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND OUT

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

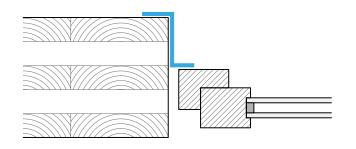















7 ROLLER

I PLASTER BAND LITE

TAPE WITH ADHESIVE MOUNTING STRIP, **CAN BE PLASTERED**

COMPLETE RANGE

Available in several variants to ensure tightness on every installation surface. Also suitable for high thickness values of insulation or cladding due to its width of up to 200 mm.

STEAM FLOW REGULATION

Available in two airtight versions for indoor and outdoor use. Indoor it acts as a vapour control layer, outdoor as a breathable layer.



CODES AND DIMENSIONS

PLASTER BAND LITE IN

	CODE	В	t	Т	L	В	L	
		[mm]	[mm]	[mm]	[m]	[in]	[ft]	
	PLAIN7520	75	20	-	25	3.0	82	5
1	PLAIN10020	100	20	-	25	3.9	82	4
ı	PLAIN15020	150	20	-	25	5.9	82	2
	PLAIN20020	200	20	-	25	7.9	82	2

Versions without glue are also available on request.

PLASTER BAND LITE IN WITH PLASTER GRID

	CODE	В	t	Т	L	В	L	
		[mm]	[mm]	[mm]	[m]	[in]	[ft]	
	PLAINN7020	130 (70 + N)	20	-	30	5.1 (2.8 + N)	98	1
_	PLAINN12020	180 (120 + N)	20	-	30	7.1 (4.7 + N)	98	1

PLASTER BAND LITE OUT

	CODE	В	t	Т	L	В	L	
		[mm]	[mm]	[mm]	[m]	[in]	[ft]	
	PLAOUT7520	75	20	-	25	3.0	82	5
1	PLAOUT10020	100	20	-	25	3.9	82	4
1	PLAOUT15020	150	20	-	25	5.9	82	2
	PLAOUT20020	200	20	-	25	7.9	82	2

Versions without glue are also available on request.










RANGE

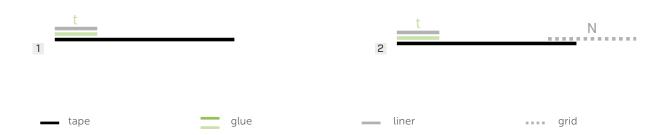



COST-PERFORMANCE

The packaging and the mix of glue and carrier made it possible to obtain a very good product at a low cost.

CAN BE PLASTERED

Technical fabric ideal for application under plaster. Also available in a version with a plaster grid for indoor use.

I PLASTER BAND LITE IN

COMPOSITION

support

3-layer PP vapour control membrane

adhesive

acrylic dispersion without solvents

release liner

PP film



COMPOSITION

plaster grid


support

3-layer PP vapour control membrane

acrylic dispersion without solvents

release liner

PP film

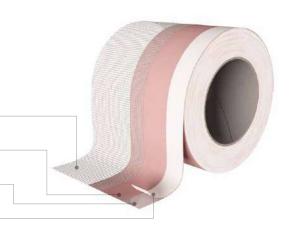

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Thickness	-	0,5 mm	20 mil
Water vapour transmission (Sd)	EN ISO 12572	≥ 10 m	≤ 0.35 US perm
Maximum tensile force MD/CD	EN 12311-1	115 / 75 N/50 mm	13.13 / 8.57 lbf/in
Elongation at break point MD/CD	EN 12311-1	≥ 40 /≥ 70%	-
Watertightness	EN 1928	conforming	-
UV-resistant	-	3 months	-
Application temperature	-	+5 / +35 °C	+41 / +95 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+1 / +25 °C	+33.8 / +77 °F
Solvents	-	no	-

 $\ensuremath{^{(1)}}\mbox{Store}$ the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 10.

I PLASTER BAND LITE OUT

COMPOSITION

support

breathable three-layer PP membrane

adhesive

acrylic dispersion without solvents

release liner

easy-release PP film



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Thickness	-	0,5 mm	20 mil
Water vapour transmission (Sd)	EN ISO 12572	≤ 1 m	≥ 3.5 US perm
Tensile strength	EN 12311-1	290 / 190 N/50 mm	33 / 22 lbf/in
Elongation at failure	EN 12311-1	≥ 40 /≥ 70%	-
Watertightness	EN 1928	conforming	-
UV-resistant	-	3 months	-
Application temperature	-	+5 / +35 °C	+41 / +95 °F
Temperature resistance	-	-40 / +80 °C	-40 / +176 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

 $^{^{(1)}} Store$ the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 10.



BREATHABLE


The product is made of a breathable membrane with the addition of an adhesive band. This also makes the product airtight and watertight.

TECHNICAL FABRIC

The surface is designed for places which need subsequent smoothing with plaster.

■ RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND LITE IN

APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

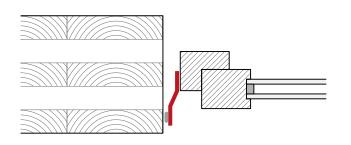








SEALING WITH WINDOW/DOOR ALREADY INSTALLED

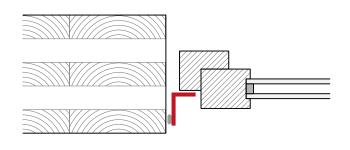








3 SUPERB GLUE, MEMBRANE GLUE, ECO GLUE

■ RECOMMENDATIONS FOR INSTALLATION | PLASTER BAND LITE OUT

APPLICATION OF THE TAPE BEFORE INSTALLATION OF THE WINDOW/DOOR FRAME

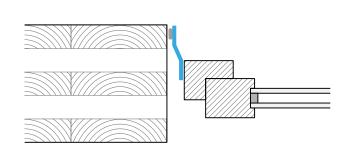








3 OUTSIDE GLUE

SEALING WITH WINDOW/DOOR ALREADY INSTALLED

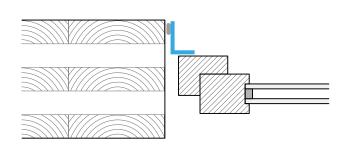







3 OUTSIDE GLUE

FRONT BAND UV 210

UNIVERSAL SINGLE-SIDED TAPE, HIGHLY RESISTANT TO UV RAYS



AESTHETICS

Support made of monolithic TRASPIR EVO UV 210 membrane for excellent aesthetic performance even when applied with TRASPIR EVO 300.

REACTION TO FIRE B-s1,d0

Self-extinguishing tape that does not spread the flame in case of fire, contributing to the passive protection of the structure.

COMPOSITION


support

TRASPIR EVO UV 210

glue

acrylic dispersion without solvents

release liner PP film

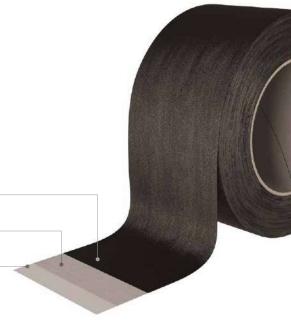

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Total thickness	DIN EN 1942	0,6 mm	24 mil
Tear strength	DIN EN 14410	≥ 100 N/25 mm	≥ 22.84 lbf/in
Expansion capacity	DIN EN 14410	20%	-
Adhesiveness	DIN EN 1939	≥ 30 N/25 mm	≥ 6.85 lbf/in
Water vapour transmission (Sd)	EN 1931	0,1 m	35 US perm
UV resistance with joints up to 50 mm wide exposing up to 40% of the surface	-	permanent	-
Reaction to fire	EN 13501-1	class B-s1,d0	-
Watertightness	-	conforming	-
Temperature resistance	-	-30 / +100 °C	-22 / +212 °F
Application temperature	-	+5 / +40 °C	+41 / +104 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

⁽¹⁾Store the product in a dry, covered location. Waste classification (2014/955/EU): 08 04 10.

■ CODES AND DIMENSIONS

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
FRONTUV75	75	20	3.0	66	8





■ FIRE PROTECTION



TRASPIR EVO UV 210 page 270



FIRE FOAM page 118



FIRE SEALING page 122 -124



FIRE PROTECTION

The combination with TRASPIR EVO UV 210 or TRASPIR EVO 300 offers the first B-s1,d0 tested system available on the market.

HEAT-RESISTANT UP TO 100°C

The product carrier is made from a new generation monolithic membrane, ensuring high levels of thermal and UV stability.

I TERRA BAND UV

BUTYL ADHESIVE TAPE



DECKS AND FACADES

Ideal for protecting joists from water and UV rays. Can be used for both patios and façades, protecting and extending the life of the wooden joists.

PERMANENT UV STABILITY

The aluminised support guarantees unlimited resistance to UV radiation that can penetrate between open joints of patios and façades.

COMPOSITION

support

UV-stable anthracite-coloured reinforced aluminium film

grey adhesive butyl compound

release liner

PE film


■ TECHNICAL DATA


Properties	standard	value	USC conversion
Initial Tack	ASTM D 2979	8 N	1.8 lbf
Adhesion on steel at 180°	ASTM D 1000	20 N/cm	11.42 lbf/in
Vertical sliding	ISO 7390	0 mm	-
Maximum tensile force MD/CD	EN 12311-1	185 / 200 N/50 mm	21.13 / 22.84 lbf/in
Elongation at break point MD/CD	EN 12311-1	10 / 20 %	-
Water vapour resistance factor (µ)	UNI EN 1931	2720000	10880 MN·s/g
Reaction to fire	EN 13501-1	class E	-
Temperature resistance	-	-30 / +90 °C	-22 / 194 °F
Application temperature	-	0 / +40 °C	+32 / 104 °F
Watertightness	-	conforming	-
UV-resistant	-	permanent	-
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / 104 °F
Solvents	-	no	-
VOC emissions	ISO 16000	30 μg/m ³	-
French VOC classification	ISO 16000	A+	-

 $^{^{(1)}}$ Store the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 99.

CODES AND DIMENSIONS

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
TERRAUV75	75	0,8	10	3.0	31	33	8
TERRAUV100	100	0,8	10	3.9	31	33	6
TERRAUV200	200	0,8	10	7.9	31	33	4
TERRAUV400	400	0,8	10	15.8	31	33	2



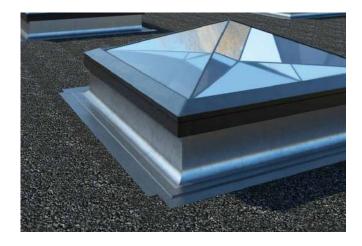







■ PRODUCT RANGE







TERRAUV100



TERRAUV200



TERRAUV400



SELF-SEALING AND SHAPEABLE

Soft and easily workable tape. The mix closes over the perforations and remains perfectly watertight.

SPECIAL BUTYL MIX

The modified butyl formulation allows excellent durability even when subjected to thermal and UV stress.

PRIMER SPRAY

UNIVERSAL SPRAY PRIMER FOR ACRYLIC ADHESIVE TAPES


INSTANTANEOUS

Thanks to spray can application and the adjustable nozzle, no brushes or other equipment is needed for installation.

HIGH PERFORMANCE

At a distance of approx. 30 - 50 cm from the surface approx. 6 cm of attaching area is achieved.

Ideal for use with Rothoblaas tapes.






■ TECHNICAL DATA

Properties	value	USC conversion
Composition	mix of thermoplastic adhesive and solvent	-
Colour	light amber	-
Time required for drying (20 °C / 50 %RH)	1-2 minutes	-
Application temperature (cartridge)	+15 / +25°C	+59 / +77 °F
Application temperature (support and ambient)	+15 / +25°C	+59 / +77 °F
Temperature resistance once dried	-10 / +100°C	+14 / +212 °F
Solvents	yes	-
French VOC classification	A+	-
VOC content	82% / 585 g/L	-
Transport temperature	+5 / +50°C	+41 / +122 °F
Storage temperature ⁽¹⁾	+15 / +35 °C	+59 / +95 °F
Storage time ⁽²⁾	up to 12 months	-

(1) Store the product in a dry, covered location. (2) Check the expiry date on the cartridge. Waste classification (2014/955/EU): 16 05 04. Aerosol 1 - H222, H229.

CODES AND DIMENSIONS

CODE	content	content	
	[mL]	[US fl oz]	
PRIMERSPRAY	750	25.36	12

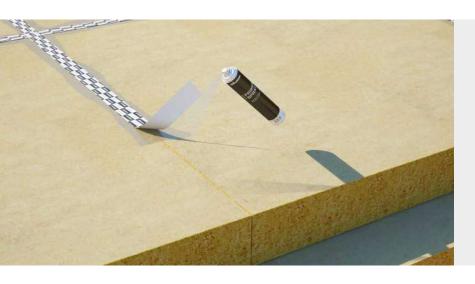

FAST INSTALLATION

It allows even the roughest and most fibrous surfaces to be smoothed to accommodate the application of taping or sealants.

ADJUSTABLE

Adjustable nozzle for a more precise application adapted to each situation. Simply turn the nozzle to increase or decrease the spray area.

PRIMER





UNIVERSAL PRIMER FOR ACRYLIC ADHESIVE **TAPES**

UNOBTRUSIVE

Transparent, thanks to the solvent - free acrylic dispersion mixture.

PRACTICAL

Ready to use, compensates for irregularities on rough surfaces and guarantees fast drying.



■ TECHNICAL DATA

Properties	value	USC conversion
Composition	acrylic dispersion without so	olvents -
Density EN 542 +20 °C	approx. 1,02 g/cm ³	0.59 oz/in ³
Viscosity	approx. 1700 mPa∙s	-
Time required for complete drying (20 °C / 50 %RH)	approx. 15 min	-
Application temperature (cartridge)	+5 / +30 °C	+41 / +86 °F
Application temperature (ambient and support)	-10 / +30 °C	+14 / +86 °F
Temperature resistance once dried	-30 / +80 °C	-22 / +176 °F
French VOC classification	A+	-
Emicode (GEV test procedure)	EC1+	-
VOC content	0% - 0 g/L	-
Transport temperature	-26 / +35 °C	-14.8 / +95 °F
Storage temperature ⁽¹⁾	+15 / +25 °C	+59 / +77 °F

⁽¹⁾ Store the product in a cool, dry place for no more than 12 months. Check the expiry date on the cartridge. Waste classification (2014/955/EU): 08 04 16. EUH208 Contains CAS 55965-84-9 (3:1), CAS 2634-33-5. May produce an allergic reaction; EUH210 Safety data sheet available on request.

■ CODES AND DIMENSIONS

CODE	content	yield	content	yield	
	[mL]	[mL/m ²]	[US fl oz]	[US fl oz/ft²]	
PRIMER	1000	100 / 200	33.81	0.32 / 0.63	6



PACKAGING


The new packaging allows immediate installation without the need for additional tools.

RE-CLOSABLE

The cap seals the package hermetically, ensuring longer product life and preventing accidental spillage during transport.

I DOORS, WINDOWS AND STRUCTURE


To ensure its effectiveness, a window/door must always be installed taking into account the principle of continuity of the wind and air tightness levels (see introduction on page 8). An improperly installed high-performance window or door frame will compromise the overall performance of the system and will not meet the needs of the end user.

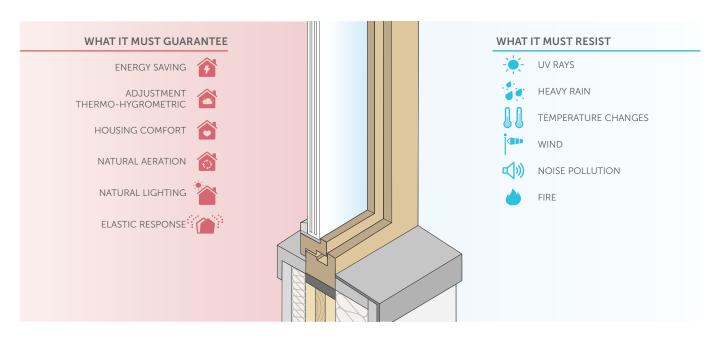

THREE LEVELS OF PROTECTION


The three level method, which is used often in most European countries, identifies the airtightness, windtightness and thermal-acoustic insulation levels for proper placement of doors and windows. To obtain maximum performance, it is important to take care in all design stages and Rothoblaas offers specific solutions for each of the three levels.

WIND TIGHTNESS LEVEL




The most external level must guarantees protection against weather. If not properly treated, it can lead to problems of infiltration and accumulation of stagnant water at the bottom of the window hole.

THERMAL AND ACOUSTIC INSULATION LEVEL



The intermediate level must guarantee thermal-acoustic performance and mechanical fixing. When choosing products, bear in mind that a good anti-noise solution is not always thermally effective.

AIRTIGHTNESS LEVEL



The most internal level must be airtight. Its function is to prevent the passage of vapour laden air, which could create condensation in the joints and mould on the surface.


Rothoblaas offers: START BAND, PROTECT, BYTUM BAND, FLEXI BAND, FLEXI BAND UV, FACADE BAND UV, SOLID BAND, SMART BAND, PLASTER BAND, PLASTER BAND LITE, MANICA PLASTER, TERRA BAND, ALU BUTYL BAND, BLACK BAND, MS SEAL

Rothoblaas offers: EXPAND BAND, WINDOW BAND, FRAME BAND, EASY FOAM, HERMETIC FOAM, FIRE FOAM


Rothoblaas offers: SEAL BAND, FLEXI BAND, SOLID BAND, SMART BAND, PLASTER BAND, PLASTER BAND LITE, MANICA PLASTER, BLACK BAND, MS SEAL

PRIMARY JOINT AND SECONDARY JOINT

INSTALLATION WITHOUT COUNTERFRAME




INSTALLATION WITH COUNTERFRAME

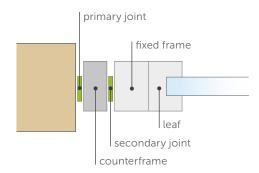


The **PRIMARY JOINT** is the first installation node between the structure and the counterframe. The **SECONDARY JOINT** is the junction between the counterframe and the frame.

CORRECT DESIGN OF THE INSTALLATION JOINT











If the design or installation does not adequately take care of any of the three levels, there is a high probability of condensation and water infiltration into the structure.

The inner protection level is not sealed, but the outer level is sealed: there is a high risk of humidity-laden internal air penetrating the joints and forming condensation in the intermediate level.











The inner protection level is sealed, the outer level is not: the joint is not effectively protected against wind and rain from outside.

The three levels of protection are correctly designed and executed: the joint performs perfectly from an acoustic and thermo-hygrometric point of view.


FOCUS: THERMAL AND ACOUSTIC INSULATION LEVEL



BG1: in accordance with DIN 18542, BG1 tapes are suitable for outdoor use even when exposed to UV light and are watertight under a pressure of at least 600 Pa.



BG2: according to DIN 18542, BG2 tapes are suitable for outdoor use if not directly exposed to UV light; they guarantee watertightness under a pressure of at least 300 Pa.



BGR: according to DIN 18542, BGR tapes are not suitable for outdoor use and are impermeable to air and water vapour.


THE WINDOW AND DOOR INSTALLATION PLAN AND ITS EFFECTS

Several factors determine this aspect: ranging from the building tradition of the place where the structure is built, the client's habits, the type of construction chosen. However, it is important to consider that the choice of window/door frame installation plan has an impact on the temperature trend in the construction node, and therefore on the general effectiveness of the installation. Continuity with the insulating layer that may be present in the layers of the wall should be searched for.

INTERNAL FLUSH INSTALLATION


Some traditional local systems prefer it because it allows the full opening of the window/door. However, this is not an optimal solution from a thermal point of view, as the window/door is moved inwards and the risk of low internal surface temperatures is greater.

In order to avoid thermal bridges in buildings with external insulation, it is recommended that the side walls of the window hole are also insulated to join them to the external insulation.

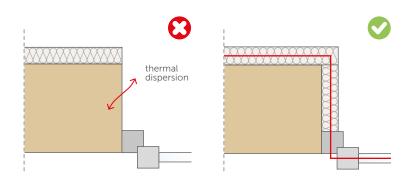


CENTRAL FLUSH INSTALLATION

It is the most common in traditional building systems. It is advisable to also insulate the side walls of the window hole in order to join them to the external insulation and avoid thermal bridges. For frame structures with an insulated gap, this solution is also suitable. The mechanical connection of the window/door is made directly to the load-bearing structure of the building.

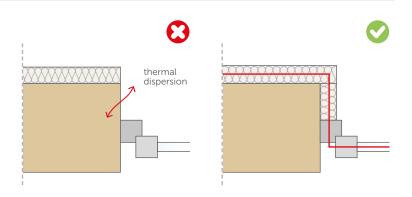

EXTERNAL FLUSH INSTALLATION


The external insulation must cover the fixed frame of the window/door and the subframe, if present, ensuring excellent internal surface temperatures. The mechanical connection of the window/door is made directly to the load-bearing structure of the building.

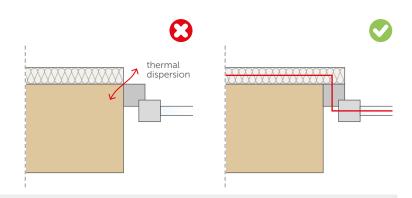

INSTALLATION IN THE INSULATION LAYER

This solution is adopted in the most high-performance constructions. It allows the reduction of the linear thermal bridge value. It requires more care when installing the window/door and greater insulation thickness.

The mechanical connection of the window/door to the structure can be made by means of a timber counterframe suitably shaped in L or Z or by means of metal brackets. This is the configuration that allows to design the isothermal lines in the best possible way to avoid any thermal bridges.



MASONRY STRUCTURE

INSTALLATION WITH FLUSH COUNTERFRAME

FLEXI BAND FLEXI BAND UV SOLID BAND SMART BAND PLASTER BAND PLASTER BAND LITE SEAL BAND EASY BAND FLEXI BAND PLASTER BAND PLASTER BAND LITE MANICA PLASTER ΕΧΡΑΝΠ ΒΑΝΠ WINDOW BAND FRAME BAND EASY FOAM HERMETIC FOAM MS SEAL FIRE FOAM SMART BAND START BAND

CLT STRUCTURE

PROTECT

BYTUM BAND


SOLID BAND

TERRA BAND

MANICA PLASTER


ALU BUTYLBAND

INSTALLATION WITHOUT COUNTERFRAME FLUSH WITH THE OUTSIDE

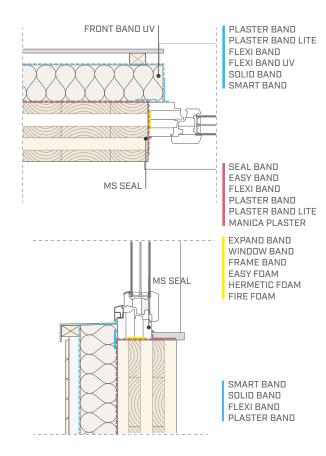


TIMBER FRAME STRUCTURE

INSTALLATION WITHOUT CENTRAL COUNTERFRAME

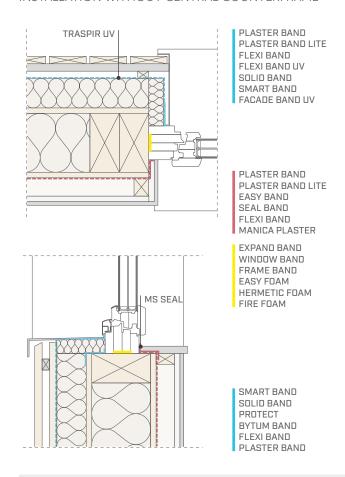

CLT STRUCTURE

INSTALLATION WITH COUNTERFRAME

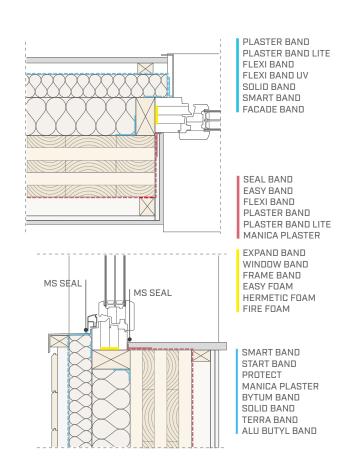

EXPAND BAND

SELF-EXPANDING SEALING TAPE

D DIN 18542 BG 1

PERMANENT ELASTIC EXPANSION

The tape self-expansion remains elastic and unchanged over time, providing protection from water, dust and wind.

SAFETY

The modified polyurethane foam has passed the most stringent tests on harmful emissions, ensuring safe installation even indoors.

COMPOSITION

EXPAND BAND

elastic polyurethane foam with additives

release liner

silicone coated paper

EXPAND BAND EVO

elastic polyurethane foam with special film additives



CODES AND DIMENSIONS

EXPAND BAND

CODE	В		S	L	В	S		L	
	[mm]	[m	ım]	[m]	[in]	[m	il]	[ft]	
EXPAND1014	10	1	4	13	0.4	39	157	43	48
EXPAND1514	15	1	4	13	0.6	39	157	43	32
EXPAND1549	15	4	9	8	0.6	157	354	26	32
EXPAND15615	15	6	15	6	0.6	236	591	20	32
EXPAND20920	20	9	20	4	0.8	354	787	13	24
EXPAND40615	40	6	15	8	1.6	236	591	26	12
EXPAND60615	60	6	15	8	2.4	236	591	26	8

EXPAND BAND EVO

CODE	В	s	L	В	s	L		
	[mm]	[mm]	[m]	[in]	[mil]	[ft]		
EXPANDEVO1014	10	1 4	20	0.4	39 157	66	48	


■ TECHNICAL DATA

Properties	standard	value	USC conversion
Classification	DIN 18542	BG 1	-
Airtightness	EN 12114	$\alpha \le 1.0 \text{ m}^3/(\text{h}\cdot\text{m}\cdot(\text{daPa})^n$	-
Tightness in heavy rain	EN 1027	≥ 750 Pa	-
Resistance to UV and weathering	DIN 18542	compliant with class BG 1	-
Compatibility with other building materials	DIN 18542	compliant with class BG 1	-
Water vapour transmission (Sd)	EN ISO 12572	< 0,5 m	-
Reaction to fire	DIN 4102-1	class B1	
Thermal conductivity (λ)	EN 12667	≤ 0,043 W/(m·K)	≤ 0.025 BTU/h·ft·°F
Temperature resistance	-	-30 / +90 °C	-22 / +194 °F
Application temperature	-	≥ +5 °C	≥ +41 °F
Storage temperature ⁽¹⁾	-	+1 / +20 °C	+33.8 / +68 °F

 $[\]ensuremath{^{(1)}}$ Store the product in a dry, covered location for no more than 24 months. Waste classification (2014/955/EU): 17 02 03.

■ FIELDS OF APPLICATION



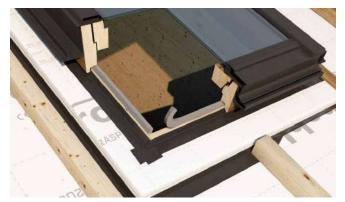

■ RELATED PRODUCTS



CUTTER page 328



WINBAG page 326



KOMPRI CLAMP page 329



EVO VERSION

The EVO version not only reduces waste and installation time because it has no separating layer, but also has a special film that keeps its shape without self-expanding as long as it is rolled up.

SAFE PACKAGING

Supplied with a plastic core to prevent water and moisture absorption during construction, which could cause unwanted swelling.

I WINDOW BAND

SELF-EXPANDING SEALING TAPE FOR WINDOWS/DOORS

DIN 18542 BG 1

TRIPLE PROTECTION

It seals the joints of doors and windows from air and heavy rain while maintaining the thermal-acoustic properties over the entire depth.

SELF-EXPANDING

Seals cracks between 6 and 15 mm, adjusting to the surface, and also ensures air and water tightness, serving as a vapour control layer.

COMPOSITION

elastic polyurethane foam with additives



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Classification	DIN 18542	BG 1	-
Airtightness	EN 12114	$\alpha \le 1.0 \text{ m}^3/(\text{h}\cdot\text{m}\cdot(\text{daPa})^n$	-
Tightness in heavy rain	EN 1027	≥ 600 Pa	-
Resistance to UV and weathering	DIN 18542	compliant with class BG 1	-
Compatibility with other building materials	DIN 18542	compliant with class BG 1	-
Water vapour resistance factor (μ)	EN ISO 12572	< 100	-
Vapour pressure gradient	-	externally permeable	
Reaction to fire	DIN 4102-1	class B1	-
Acoustic insulation of the joint		59 dB	
Thermal conductivity (λ)	EN 12667	≤ 0.043 W/(m·K)	≤ 0.025 BTU/h·ft·°F
Temperature resistance	-	-30 / +90 °C	-22 / +194 °F
Application temperature	-	≥ +5 °C	≥ +41 °F
Storage temperature ⁽¹⁾	-	+1 / +20 °C	+33.8 / +68 °F

 $^{^{(1)}}$ Store the product in a cool, dry place for no more than 24 months. Waste classification (2014/955/EU): 17 02 03.

■ CODES AND DIMENSIONS

CODE	В		S	L	В	S	5	L	
	[mm]	[m	ım]	[m]	[in]	[m	nil]	[ft]	
WINDOW54615	54	6	15	15	2.1	236	591	49	7
WINDOW74615	74	6	15	15	2.9	236	591	49	5

■ FIELDS OF APPLICATION









■ RELATED PRODUCTS



CUTTER page 328



WINBAG page 326



KOMPRI CLAMP page 329



FAST INSTALLATION

The advantage of this is that it saves a considerable amount of time during assembly. With just one product it is possible to seal the three layers without the need for additional products.

PERFORMING BG1

Conforms with EnEV and RAL requirements, and guarantees a high level of thermal and acoustic insulation

FRAME BAND

DIN 18542

BG1

SELF-EXPANDING SEALING TAPE FOR WINDOWS/DOORS

HERMETIC

Airtight and watertight, it interrupts possible acoustic bridges in the structure-window joint.

PRACTICAL

Thanks to the adhesive strip, application is easy and precise without the need for further glue.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Classification	DIN 18542	BG 1	-
Air permeability (α)	EN 12114	0 m ³ /(h·m·(daPa) ⁿ	_
Thermal conductivity (λ)	EN 12667	≤ 0,048 W/(m·K)	0.028 BTU/h·ft·°F
Water vapour transmission (Sd)	EN ISO 12572	indoor: 25 m outdoor: 0,5 m	-
Resistance to heavy rain	EN 1027	≥ 1050 Pa	-
Compatibility with other building materials	DIN 18542	compliant with class BG 1	
Resistance to UV and weathering	DIN 18542	compliant with class BG 1	-
Reaction to fire class	DIN 4102-1	class B1	-
Acoustic insulation of joints $R_{S,w}(ift)$	EN ISO 10140-1 EN ISO 10140-2 EN ISO 717-1	18 mm: ≥ 63 (-2;-5) dB	-
Temperature resistance		-30 / +80 °C	-22 / +176 °F
Application temperature		≥ +5 °C	≥ +41 °F
Storage temperature ⁽¹⁾		+5 / +20 °C	+41 / +68 °F
Emicode	GEV test procedure	EC1 plus	-

⁽¹⁾Store the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 17 02 03.

■ CODES AND DIMENSIONS

CODE	В	S	;	S _{max}	L	В		S	S _{max}	L	
	[mm]	[m	m]	[mm]	[m]	[in]	[n	nil]	[mil]	[ft]	
FRAME2054	54	2	12	20	30	2.1	79	472	787	98	7
FRAME2074	74	2	12	20	30	2.9	79	472	787	98	5



PROFESSIONAL INSTALLATION

Conforms with EnEV and RAL requirements, and guarantees a high level of thermal and acoustic insulation.

VERSATILE

It effectively seals any type of crack between 2 and 10 mm, resisting heavy rain.

FASTENING FOR WINDOWS AND DOORS: SAFETY AND RELIABILITY



Discover the wide range of fastening systems specifically designed for window/door installation, such as SHS small head screws also available in stainless steel versions, MBS screws for direct fixing to masonry and WKR reinforced angle brackets. It ensures the appropriate fastening to your windows and doors.

Scan the QR code and find out the characteristics of the MBS and SHS screws in the "Screws and connectors for timber" catalogue








SEAL WITH FOAM

Polyurethane foam is a chemical sealant. Its main functions are to waterproof, insulate and seal. It is commonly used in installation of windows and doors, to fill in cracks or air voids in construction, or to attach different elements to avoid infiltration and passage of air.


RECOMMENDATIONS WHEN SEALING WITH FOAM

The biggest advantage offered by foam is its ability to penetrate inside the opening, ceiling, hollow space, or hole, and in general in all situations in which a sheet of material cannot be used.


Note It is always advisable to have the correct Personal Protective Equipment (PPE) and to consult the technical data sheet and safety data sheet before starting the application.




The substrates must be resistant, clean, free of oil and grease, dust and dirt in general. Foam expands; fasten the support materials to prevent deformation and movement.




Shake the can energetically at least 15-20 times before using, keeping it horizontal and repeating this operation after the processing intervals, if any.



To be able to form a uniform cell structure, it is important to moisten the surfaces. When more than one layer of foam is required, spray the surface of each layer before proceeding with the next one. We recommend about 1 dl of water each can.




Caution: do not fill the entire cavity because foam is self-expanding and increases its volume before it fully hardens. So, considering post expansion, apply only the necessary amount.



For optimal performance work at an ambient temperature of approximately +20°. Tip: Immerse the can in warm or cool water to raise or lower the temperature of the mix.




Before inserting the can in the gun (CODE FLYFOAM), check that there is no foam residue from the last use. The guns are equipped with a specific valve that regulates the extrusion pressure, to dose the foam precisely.



Any surplus hardened foam can be cut off with a cutter or sanded down with sandpaper. All our foams can be cut.



After use, carefully eliminate all foam residue from the gun. If it hardens inside, it could become unusable. The cleaner (CODE FLYCLEAN) is effective until the foam has hardened, after which the residues can only be removed mechanically.



In addition to the traditional foams to be used with a foam gun, a manual foam (COD. EASYFOAMMAN) that requires no professional equipment for application and can be applied using the nozzle provided is also available.

7.

EASY FOAM







GENERAL PURPOSE FOAM SEALANT

VERY LOW EMISSIONS

Compatibility for indoor use tested and certified by EC1 plus.

CONTROLLED EXPANSION

The special formula limits the foam post expansion, so that it does not create excessive pressure on the glued elements.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Film formation time 23 °C / 50% RH	-	9 - 13 min	-
Cutting time 23 °C / 50% RH	-	20 - 40 min	-
Time required for complete hardening	-	60 min	-
Thermal conductivity (λ)	EN 12667	0,030 - 0,035 W/(m·K)	0.017 - 0.02 BTU/h·ft·°F
Reaction to fire	DIN 4102-1	class B3	-
Temperature resistance once hardened	-	-40 / +90 °C	-40 / +194 °F
Application temperature (cartridge)	-	+15 / +30 °C	+59 / +86 °F
Application temperature (ambient and support)	-	+5 / +35 °C	+41 / +95 °F
Emicode	GEV test procedure	EC1 plus	-
French VOC classification	ISO 16000	A+	-
VOC content	-	19,4% / 191,2 g/L	-
Transport temperature	-	0 / +35 °C	+32 / +95 °F
Storage temperature ⁽¹⁾	-	+15 / +25 °C	+59 / +77 °F

⁽¹⁾ Store the product in a vertical position in a dry, covered location for no more than 18 months. Check the expiry date on the cartridge. Waste classification (2014/955/EU): 16 05 04

CODES AND DIMENSIONS

CODE	content [mL]	yield [L]	content [US fl oz]	yield [US gal]	cartridge	version	
1 EASYFOAM	750	40	25.36	10.57	aluminium	gun	12
2 EASYFOAMMAN	750	25	25.36	6.60	aluminium	manual	12



PRICE-QUALITY RATIO

It represents a good compromise between performance, elasticity and price, guaranteeing adhesion and tightness.

COMPLETE RANGE

Available in manual or gun versions, both of which can be trimmed after drying.

Aerosol 1. Acute Tox. 4.Acute Tox. 4.Skin Irrit. 2. Eye Irrit. 2.Resp. Sens. 1. Skin Sens. 1. Carc. 2. STOT SE 3. STOT RE 2. Lact. Aquatic Acute 1. Aquatic Chronic 1.

I HERMETIC FOAM









CERTIFIED NOISE REDUCTION

Up to 63 dB noise reduction, certified by the IFT Rosenheim institution (ISO 10140-1).

AIRTIGHT EVEN AFTER TRIMMING

Waterproof and airtight, even if trimmed after hardening, thanks to the closed-cell structure.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Composition	-	Single component PU	-
Colour	-	white	-
Film formation time 23 °C / 50% RH	-	6 - 10 min	-
Cutting time 23 °C / 50% RH	-	20 - 40 min	-
Time required for complete hardening 23 °C / 50% RH	-	60 min	-
Thermal conductivity (λ)	FEICA TM1020/ EN 12667	0,030 - 0,035 W/(m·K)	0.017 - 0.02 BTU/h·ft·°F
	EN ISO 10140-1	10 mm: ≥ 63 (-1;-5) dB	-
Acoustic insulation of joints R _{S,w} (ift)	EN ISO 10140-2 EN ISO 717-1	20 mm: ≥ 62 (-1;-5) dB	-
Water vapour resistance factor (µ)	EN 12086	36	-
Reaction to fire	DIN 4102-1	class B3	-
Reaction to life	EN 13501-1	class F	-
Temperature resistance once hardened	-	-40 / +90 °C	-40 / +194 °F
Application temperature (cartridge, environment and support)	-	+5 / +35 °C	+41 / +95 °F
Emicode	GEV test procedure	EC1 plus	-
French VOC classification	ISO 16000	A+	-
VOC content	-	17,0 % - 173,3 g/L	-
Transport temperature	-	0 / +35 °C	+32 / +95 °F
Storage temperature ⁽¹⁾	-	+15 / +25 °C	+59 / +77 °F
Storage time ⁽²⁾	-	12 months	-

 $[\]ensuremath{^{(1)}}\mbox{Store}$ the product in a vertical position in a dry, covered location.

Waste classification (2014/955/EU): 16 05 04.

Aerosol 1. Acute Tox. 4.Acute Tox. 4.Skin Irrit. 2. Eye Irrit. 2.Resp. Sens. 1. Skin Sens. 1. Carc. 2. STOT SE 3. STOT RE 2

CODES AND DIMENSIONS

CODE	content [mL]	yield [L]	content [US fl oz]	yield [US gal]	cartridge	
HERFOAM	750	40	25.36	10.57	aluminium	12
CODE	content [mL]	yield [L]	content [US fl oz]	yield [US gal]	cartridge	
HERFOAMB2	750	32	25.36	8.45	aluminium	12

⁽²⁾ Check the expiry date on the cartridge.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Composition	-	Single component PU	-
Colour	-	white	-
Density		15-20 kg/m ³	-
Film formation time 20°C / 65% RH	-	6-8 min	-
Cutting time 23 °C / 50% RH	-	15-20 min	-
Reaction to fire	EN 13501-1	class E	-
Reaction to life	DIN 4102-1	class B2	-
Temperature resistance once hardened	-	-40 / +80 °C	-40 / +176 °F
Application temperature (cartridge)	-	+5 / +35 °C	+41 / +95 °F
Application temperature (ambient)	-	+5 / +35 °C	+41 / +95 °F
Application temperature (support)	-	+5 / +35 °C	+41 / +95 °F
Storage temperature ⁽¹⁾	-	+15 / +25 °C	+59 / +77 °F
Storage time ⁽²⁾	-	12 months	-

 $^{^{(1)}}$ Store the product in a vertical position in a dry, covered location.

■ FIELDS OF APPLICATION





■ RELATED PRODUCTS



FLY FOAM page 333



FOAM CLEANER page 333



CUTTER page 328



EMICODE EC1 PLUS

Its low VOC content and very low emissions also make this foam perfect for indoor use.

HIGH ELASTICITY

Thanks to its the composition, it remains elastic and deformable over time, compensating for the movements of the wood and differential deformation of the building materials.

⁽²⁾ Check the expiry date on the cartridge.

Waste classification (2014/955/EU): 16 05 04.

I FIRE FOAM











HIGH FIRE-RESISTANT SEALING FOAM

FIRE RESISTANCE EI 240

Tested in the event of fire to provide protection against combustion fumes and heat for up to 240 minutes.

ETA CERTIFICATE

The only ETA tested and certified foam for fire protection and sealing of linear joints and cracks.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Composition	-	Single component PU	-
Colour	-	pink	-
Post expansion	-	90 - 120 %	-
Film formation time 20 °C / 65% RH	FEICA TM1014	≤ 10 min	-
Cutting time 23 °C / 50% RH	-	≤ 40 min	-
Time required for complete hardening 23 °C / 50% RH	-	24 h	_
Thermal conductivity (λ)	-	0,036 W/(m·K)	0.02 BTU/h·ft·°F
Dimensional stability	-	≤ 3 %	_
Reaction to fire	DIN 4102-1	class B1	-
Reaction to life	EN 13501-1	class B-s1,d0	-
Fire resistance rating ⁽¹⁾	EN 13501-2	EI240	-
Temperature resistance once hardened	-	-30 / +80 °C	+50 / +176 °F
Application temperature (ambient)	-	+10 / +30 °C	+50 / +86 °F
Application temperature (support)	-	+10 / +30 °C	+50 / +86 °F
Application temperature (cartridge)	-	+10 / +30 °C	+50 / +86 °F
French VOC classification	-	A+	-
VOC content	-	0,12% - 158 g/L	-
Transport temperature	-	-20 °C / +30 °C	-4/+86°F
Storage temperature ⁽²⁾	-	+5 °C / +30 °C	+41 / +86 °F
Storage time ⁽³⁾	-	up to 18 months	-

⁽¹⁾For 10 mm and 20 mm wide joints.

Waste classification (2014/955/EU): 16 05 04.
Aerosol 1. Resp. Sens. 1. Carc. 2. STOT RE 2. Acute Tox. 4. Skin Irrit. 2. Eye Irrit. 2. Skin Sens. 1. STOT SE 3

CODES AND DIMENSIONS

CODE	content	yield	content	yield	cartridge	
	[mL]	[L]	[US fl oz]	[US gal]		
FIREFOAM	750	42	25.36	11.1	aluminium	12

 $[\]ensuremath{^{(2)}}\mbox{Store}$ the product in a vertical position in a dry, covered location.

⁽³⁾ Check the expiry date on the cartridge.

■ FIELDS OF APPLICATION





■ RELATED PRODUCTS



FLY FOAM page 333



FOAM CLEANER page 333



FIRE SEALING page 122 -124



MAXIMUM PERFORMANCE

Its uniform cell structure, dimensional stability and mechanical properties make it the ideal product for insulating, sealing and filling in all cases where high fire protection requirements are required.

IMS SEAL





MS POLYMER HIGH ELASTICITY SEALANT

IT CAN BE PAINTED

It can be overpainted with water-based paints commonly used in construction.

SECURE

MS POLYMER, pure, single-component, with no shrinkage. It offers an alternative to ensure airtightness in the case of visible sealing.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Classification	EN 15651-1	F-EXT/INT-CC ⁽¹⁾	-
Specific weight	-	1,5 kg/dm ³	0.87 oz/in ³
Surface cross-linking time 20 °C / 50% RH	-	approx. 20 min	-
Hardening speed 20 °C / 50 %RH	-	2,5 mm/24 h	0.1 in/24 h
Shore A hardness	DIN 53505	25	-
Elongation at failure	ISO 8339	400%	-
Elastic return	ISO 7389	> 70%	-
Application temperature	-	+5 / +35 °C	+41 / +95 °F
French VOC classification	ISO 16000	A+	-
VOC content	ISO 11890-2	9,2 g/L	-
Storage temperature ⁽²⁾	-	+5 / +25 °C	+41 / +77 °F

⁽¹⁾ Non-structural sealant for façade elements, for external and internal use, also in areas with cold climates. (2) Store the product in a dry and covered place (12 months rigid cartridge/18 months soft cartridge). Check the expiry date on the packaging. Waste classification (2014/955/EU): 08 04 10.

EUH210 Safety data sheet available on request. EUH208 Contains CAS 1760-24-3. May produce an allergic reaction.

CODES AND DIMENSIONS

CODE	content	content	version	
	[mL]	[US fl oz]		
MSSEALWHI300	300	10.14	rigid cartridge	24
MSSEALGRE300	300	10.14	rigid cartridge	24
MSSEALWHI600	600	20.29	soft cartridge	12
MSSEALGRE600	600	20.29	soft cartridge	12




PERFORMANCE

Excellent resistance to ageing and UV rays. Classified as a non-structural sealant for façade elements, for outdoor and indoor use, also in areas with cold climates (type F-EXT-INT-CC) according to EN 15651-1.

UNIVERSAL

Universal one-component sealant ideal for glueing and sealing the most common building materials.

IT INCREASES ALADIN STRIPE FIRE RESISTANCE

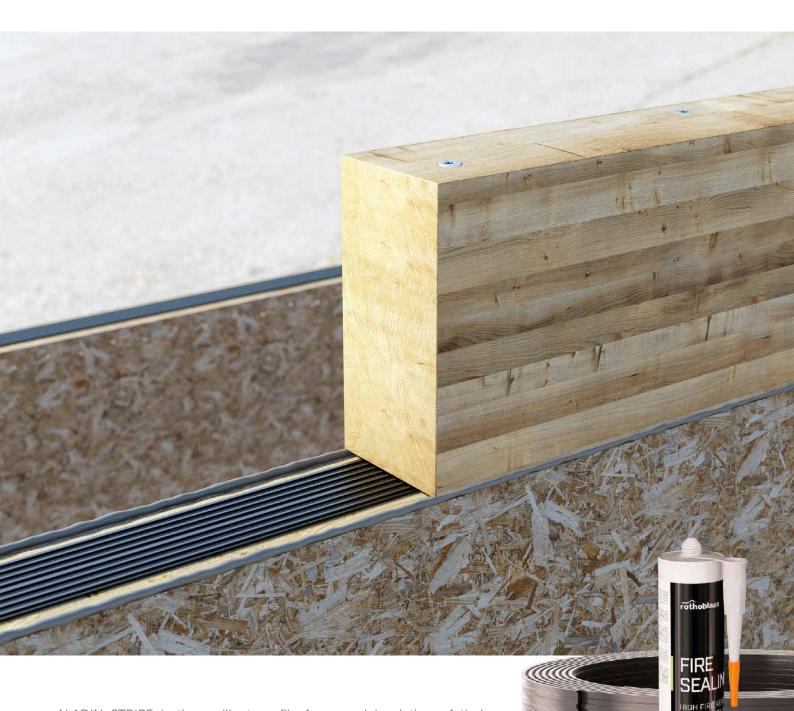

ALADIN STRIPE is the resilient profile for sound insulation of timber structures and houses. Thanks to the innovative compound in extruded and expanded EPDM to optimise noise reduction based on typical timber structure loads, it ensures absorption up to 4 dB in accordance with the standard EN ISO 140-7. Safety is always a priority: thanks to our wide range of fire-certified profiles, sealants, foams and tapes, you can always be sure of the safety of our solutions.

Scan the QR code and discover the technical features of ALADIN STRIPE







I FIRE SEALING ACRYLIC











HIGH FIRE-RESISTANT ACRYLIC SEALANT

IT CAN BE PAINTED

The sealant can be overpainted with the most common water-based paints and varnishes.

FIRE SAFETY

It can be used in applications subject to fire protection regulations up to EI 240.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Composition	-	based on acrylic polymers in water dispersion	-
Classification	EN 15651-1	F-INT ⁽¹⁾	-
Density	UNI 8490/2	1,70 g/mL	272.61 oz/gal
Yield for 10x10 mm joint	-	5,5 m	18.04 ft
Surface cross-linking time 23 °C	-	approx. 30 min	-
Time required for complete hardening 23 °C / 50 %R	-	approx.10 days	-
Shore A hardness	EN ISO 868	10 approx.	-
Elongation at failure	DIN 53504	700%	-
Reaction to fire	EN 13501-1	class B-s1,d0	-
Fire resistance rating	EN 13501-2	EI240 ⁽²⁾	-
Emicode	GEV test procedure	EC1 plus	-
French VOC classification	ISO 16000	A+	-
VOC content	-	1,6% / 27 g/L	-
Storage temperature ⁽³⁾	-	+5 / +35 °C	+41 / +95 °F
Expiry ⁽³⁾	-	up to 24 months	-

⁽¹⁾Non-structural sealant for façade elements, for indoor use.

Waste classification (2014/955/EU): 08 04 10.

EUH210 Safety data sheet available on request. EUH208 Contains CAS 55965-84-9 (3:1), CAS 2634-33-5. May produce an allergic reaction.

CODES AND DIMENSIONS

CODE	content	content	colour	version	
	[mL]	[US fl oz]			
FIREACR550	550	18.60	white	soft cartridge	20

⁽²⁾ Valid for tested configurations.

 $^{^{(3)}}$ Store the product in a dry place and check the expiry date on the cartridge.

■ FIELDS OF APPLICATION







■ RELATED PRODUCTS



FLY SOFT page 332



FIRE FOAM page 118



BRUSH page 327



VERSATILE

Good workability, it also adheres to moist supports, does not drip and is easily smoothed.

EMICODE EC1 PLUS

Certified by GEV in terms of very low emissions of Volatile Organic Compounds.

I FIRE SEALING SILICONE











HIGH FIRE-RESISTANT SILICONE SEALANT

SAFETY

For sealing linear joints in fire rated walls and doors, in situations subject to fire regulations.

FIRE RESISTANCE EI 240 AND CLASS B-s1,d0

Tested protection, designed to offer maximum protection against the passage of flames, smoke or gases.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Composition	-	silicone	-
Classification	EN 15651-1	F-EXT/INT-CC ⁽¹⁾	-
Density	ISO 1183-1	1,482 g/mL	237.65 oz/gal
Yield for 10x10 mm joint	-	3,1 m	10.7 ft
Surface cross-linking time 23 °C	-	approx. 80 min	-
Hardening speed 23 °C	-	approx. 2 mm in 24 h	-
Shore A hardness	DIN 53505	approx. 30	-
Elongation at failure	DIN 53504	460%	-
Tensile strength	DIN 53504	0,72 N/mm ²	104.43 lbf/in ²
Elastic modulus 100%	DIN 53504	0,38 N/mm ²	55.11 lbf/in ²
Reaction to fire	EN 13501-1	class B-s1,d0	-
Fire resistance rating	EN 13501-2	EI 240 ⁽²⁾	-
Acid resistance	-	excellent	-
Bases resistance	-	excellent	-
Emicode	GEV test procedure	EC1	-
French VOC classification	ISO 16000	A+	-
VOC content	-	4,3% / 64 g/L	-
Expiry ⁽³⁾	-	up to 12 months	-

⁽¹⁾ Non-structural sealant for façade elements, for external and internal use, also in areas with cold climates.

Waste classification (2014/955/EU): 08 04 09

Eye Dam. 1 . Skin Sens. 1B.

CODES AND DIMENSIONS

CODE	content [mL]	content [US fl oz]	colour	version	
FIRESILGRE310	310	10.48	grey	rigid cartridge	24
FIRESILIVO310	310	10.48	ivory	rigid cartridge	24

⁽²⁾ Valid for tested configurations.

 $[\]ensuremath{^{(3)}}\mbox{Store}$ the product in a dry place and check the expiry date on the cartridge.

■ FIELDS OF APPLICATION

IVORY



GREY





RELATED PRODUCTS



FLY page 332



FIRE FOAM page 118



page 130

FAÇADE AND EXTREME CLIMATES

Classified, according to EN 15651-1, for indoor and outdoor non-structural uses, it can also be used on façades and in areas with cold climates. High adhesion and high UV resistance.



SAFETY

For sealing linear joints in fire rated walls and doors, in situations subject to fire regulations.

I NAIL PLASTER | GEMINI

HIGH-ADHESION NAIL POINT SEALANT TAPE

HERMETIC

The closed cell polyethylene structure ensures the opening created by the fastening systems is waterproof.

WIDE RANGE

Also available in 5 mm thickness, 70 mm width and double-sided adhesive for more secure sealing.

COMPOSITION

NAIL PLASTER

carrier

PE foam

adhesive

synthetic rubber

GEMINI

adhesive

synthetic rubber

carrier

PE foam

adhesive

synthetic rubber

line

silicone-impregnated film

■ CODES AND DIMENSIONS

NAIL PLASTER

CODE	В	S	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
NAILPLA350	50	3	30	2.0	118	98	10
NAILPLA370	70	3	30	2.8	118	98	7
NAILPLA550	50	5	10	2.0	197	33	6

CODE	В	Н	s	В	Н	S	pcs/roll	
	[mm]	[mm]	[mm]	[in]	[in]	[mil]		
NAILPLA35050	50	50	3	2.0	2.0	118	400	6

GEMINI

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
GEMINI60	60	3	30	2.4	118	98	8
GEMINI80	80	3	30	3.2	118	98	6

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Tensile strength	EN 1939	material failure	
Temperature resistance	-	-30 / +80 °C	-22 / +176 °F
Application temperature	-	≥ +5 °C	≥ +41 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

 $^{^{(1)}} Store$ the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 10.

■ FIELDS OF APPLICATION











PRACTICAL

With the help of LIZARD, installation is easy and fast, done directly on the ventilation battens.

DOUBLE SECURITY

The GEMINI version offers double adhesiveness and guarantees continuous adhesion between the membrane and batten, avoiding water accumulation in drilled points.

NAIL BAND

BUTYL NAIL POINT SEALANT TAPE



Thanks to its modified butyl formulation, it ensures excellent durability even when subjected to thermal stress. Also suitable for installation at low temperatures.

LOW TEMPERATURES

The butyl ensures excellent adhesion to supports under difficult environmental conditions.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Tensile strength	EN 14410	25 N/25 mm	5.71 lbf/in
Elongation at failure	EN 14410	> 300%	-
90° adhesion force	-	≥ 15 N/25 mm	≥ 3.43 lbf/in
Reaction to fire	EN 13501-1	class E	-
Temperature resistance	-	-30 / +80 °C	-22 / +176 °F
Application temperature	-	+5 / +40 °C	+41 / +104 °F
Storage temperature ⁽¹⁾	-	+5 / +25 °C	+41 / +77 °F
Solvents	-	no	-

⁽¹⁾ Store the product in a dry, covered location. Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	В	S	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
NAILBAND50	50	1	15	2.0	39	49	12



SELF-SEALING

Due to its elasticity, butyl tends to seal around the screw or nail used to fix the battens or elements on which it is installed.

DURABILITY

The butyl compound ensures excellent durability even under thermal stress, while maintaining elasticity and impermeability over time.

BUTYL BAND







DOUBLE-SIDED UNIVERSAL BUTYL TAPE

STRONG

The polyester grid guarantees consistence and high resistance.

HERMETIC

Appropriate for watertight seals for timber-to-timber and/or timber-to-concrete joints.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Maximum tensile force MD/CD	EN 12311-1	115 / 140 N/50 mm	13.13 / 16 lbf/in
Elongation at break point MD/CD	EN 12311-1	15 / 15%	-
Adhesion on steel at 180°	ASTM D 1000	35 N/cm	20 lbf/in
Initial Tack	ASTM D 2979	10 N	2.25 lbf
Reaction to fire	EN 13501-1	class E	-
Temperature resistance	-	-30 / +130 °C	-22 / +266 °F
Application temperature	-	+5 / +40 °C	+41 / +104 °F
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / +104 °F
Solvents	-	no	-
VOC emissions	ISO 16000	30 μg/m ³	-
French VOC classification	ISO 16000	A+	-

⁽¹⁾ Store the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
BUTYLBAND1501	15	1	15	0.6	39	49	20
BUTYLBAND1502	15	2	10	0.6	79	33	13



SPECIAL BUTYL MIX

Thanks to its special modified butyl formulation, it ensures excellent durability even when subjected to thermal stress and UV radiation.

ADJUSTABLE

Butyl is also perfectly suited for installation in tight spaces and on irregular profiles without resistance.

I FIRE STRIPE

INTUMESCENT THERMO-INFLATABLE **FLEXIBLE GASKET**

INTUMESCENT

It expands under the effect of strong heat. As it expands, it seals the cavity in which it is placed, blocking the passage of flames.

FIRE PROTECTION

Installable in tight spaces, it is perfect for the fire protection of our concealed fastening systems.



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Colour	-	grey	-
Reaction to fire	NF P92-501	M1 - non-flammable	-
Application temperature	-	+5 / +35 °C	+41 / +95 °F
Storage temperature	-	+1 / +25 °C	+33.8 / +77 °F
French VOC classification	ISO 16000	A+	-

 $^{^{(1)}}$ Store the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
FIRESTRIPE10	10	2	6	0.4	79	20	56




DURABILITY

The profile has good resistance to UV and thermal stress and is not subject to rotting.

FAST INSTALLATION

The tape is adhesive, is installed quickly and no support tools are required.

CONCEALED JOINTS AND FIRE SAFETY

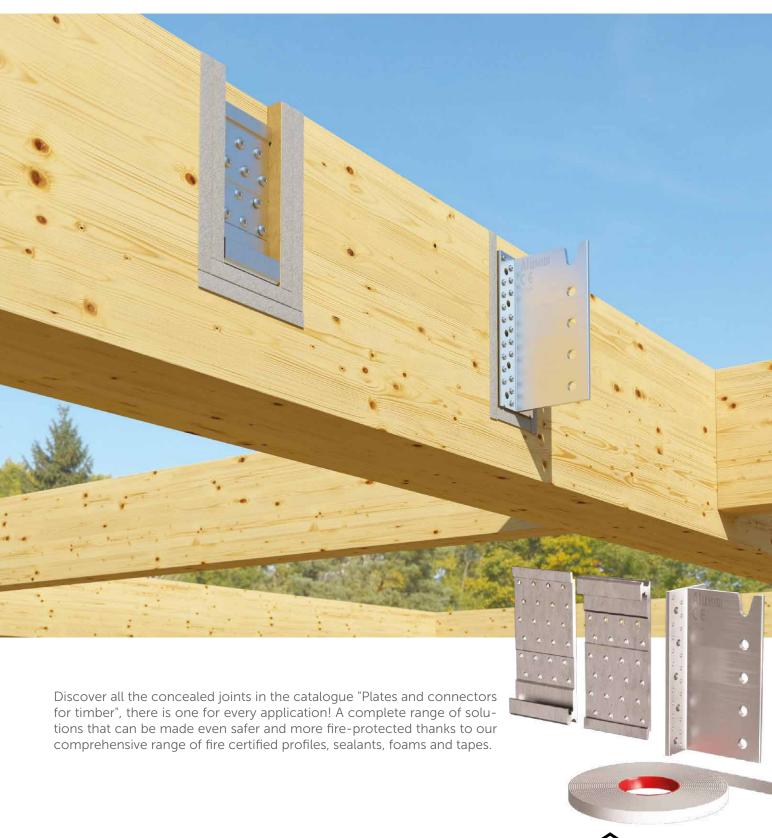

Scan the QR code and download our "Plates and connectors for timber" catalogue.







I SUPRA BAND



UNIVERSAL DOUBLE-SIDED BUTYL TAPE WITH **HIGH ADHESIVENESS**



PEERLESS

Water and air resistant, it guarantees adhesion even to wet supports and at low temperatures.

ELASTIC

Also suitable for sealing wood-wood joints (it compensates for the natural movements of the material).

COMPOSITION

release liner

silicone coated paper

double-sided grey butyl compound



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Ageing resistance	-	long duration	-
Initial Tack	ASTM D 2979	6 N	1.35 lbf
Adhesion on steel at 180°	ASTM D 1000	16 N/cm	9.14 lbf/in
Adhesiveness on concrete 180°	-	32 N/cm	18.27 lbf/in
Vertical sliding	ISO 7390	absent	-
Temperature resistance	-	-30 / +90 °C	-22 / 194 °F
Application temperature	-	-5 / +40 °C	+23 / 104 °F
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / 104 °F
Solvents	-	no	-
VOC emissions	ISO 16000	30 μg/m ³	-
French VOC classification	ISO 16000	A+	-


 $^{^{(1)}}$ Store the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 10.

■ CODES AND DIMENSIONS

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
SUPRA6	6	4	6	0.2	160	20	16
SUPRA10	10	4	6	0.4	160	20	22

■ FIELDS OF APPLICATION



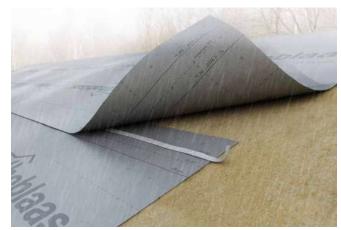





■ RELATED PRODUCTS



DOUBLE BAND page 62



OUTSIDE GLUE page 154



SUPERB GLUE page 150



SPECIAL BUTYL MIX

The modified butyl formulation of the product allows instant and permanent adhesion to all building materials. In addition, the material is impermeable to water and steam, ensuring a perfect seal.

FAST INSTALLATION

Its adhesive power also allows the sealing of damp or porous surfaces without the need to apply additional products, saving time and money.

I ALU BUTYL BAND



REFLECTING BUTYL ADHESIVE TAPE



BUTYL

The butyl composition offers excellent adhesiveness on the most common surfaces, even very porous ones.

UV-STABLE

The reinforced aluminium coating protects the butyl mixture, guaranteeing that the seal lasts.

COMPOSITION


support

reinforced aluminium film

grey adhesive butyl compound

release liner

PE film

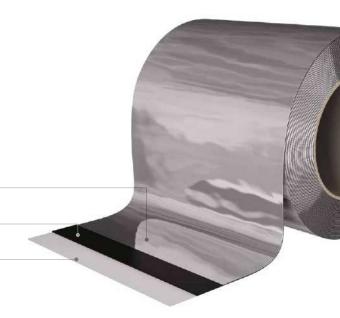

TECHNICAL DATA

Properties	standard	value	USC conversion
Initial Tack	ASTM D 2979	8 N	1.8 lbf
Adhesion on steel at 180°	ASTM D 1000	20 N/cm	11.42 lbf/in
Vertical sliding	ISO 7390	0 mm	-
Maximum tensile force MD/CD	EN 12311-1	185 / 200 N/50 mm	21.13 / 22.84 lbf/in
Elongation at break point MD/CD	EN 12311-1	10 / 20 %	-
Water vapour resistance factor (µ)	UNI EN 1931	2720000	13600 MN·s/g
Reaction to fire	EN 13501-1	class E	-
Temperature resistance	-	-30 / +90 °C	-22 / 194 °F
Application temperature	-	0 / +40 °C	+32 / 104 °F
Watertightness	-	conforming	-
UV-resistant	-	permanent	-
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / 104 °F
Solvents	-	no	-
VOC emissions	ISO 16000	30 μg/m ³	-
French VOC classification	ISO 16000	A+	-

⁽¹⁾Store the product in a cool, dry place for no more than 12 months.

Waste classification (2014/955/EU): 08 04 99.

■ CODES AND DIMENSIONS

CODE	В	s	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
ALUBUTYL75	75	1	10	3.0	39	33	8
ALUBUTYL150	150	1	10	5.9	39	33	4

■ FIELDS OF APPLICATION









■ RELATED PRODUCTS




ALU BAND page 61



BYTUM SPRAY page 46



BYTUM LIQUID page 48

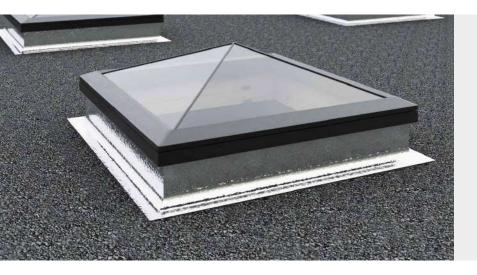

STRONG

Thanks to the reinforced aluminium film, it has outstanding mechanical properties and is tear-resistant.

VERSATILE

Widely used in building roofing, repair of surface cracks, repair of motor homes, windows, boat seals, glazing and roofing.

BLACK BAND



UNIVERSAL SINGLE-SIDED BUTYL TAPE



EXTRAORDINARY

Universal and expandable up to 300%, it effectively seals any crack on the most widely used construction materials.

PRACTICAL

Ideal for easy sealing on difficult nodes and very irregular surfaces; self-sealing even at low temperatures.

COMPOSITION

support

high density PE film

alue

black adhesive butyl compound

release liner

easy-release PP film

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Initial Tack	ASTM D 2979	8 N	1.8 lbf
Adhesion on steel at 180°	ASTM D 1000	20 N/cm	11.42 lbf/in
Maximum tensile force MD/CD	EN 12311-1	20/10 N/50 mm	2.28/1.14 lbf/in
Elongation at break point MD/CD	EN 12311-1	250/300 %	-
Temperature resistance	-	-30 /+90 °C	-22 / 194 °F
Application temperature	-	0 / +40 °C	+32 / 104 °F
Watertightness	-	conforming	-
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / 104 °F
Solvents	-	no	-
VOC emissions	ISO 16000	30 μg/m ³	-
French VOC classification	ISO 16000	A+	-

 $^{^{(1)}}$ Store the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 10.

■ CODES AND DIMENSIONS

CODE	liner	В	s	L	liner	В	S	L	
	[mm]	[mm]	[mm]	[m]	[in]	[in]	[mil]	[ft]	
BLACK50	50	50	2	10	2.0	2.0	79	33	6
BLACK4040	40 / 40	80	2	10	1.6 / 1.6	3.2	79	33	4

■ RECOMMENDATIONS FOR INSTALLATION

SEALING OF TECHNICAL INSTALLATIONS AND PASSAGES









SEALING OF JOINT IN THE GROUND CONNECTION NODE







FINGERLIFT AND PRE-CUT LINER

Thanks to the easy-release film, installation is quick. The 80 mm version has a pre-cut liner to facilitate installation in corners or complex locations.

SPECIAL BUTYL MIX

The product's modified butyl formulation ensures excellent durability even under thermal stress making it suitable for installation even at low temperatures.

I MANICA PLASTER



ADHESIVE SEALING SLEEVE THAT CAN BE **PLASTERED**



CAN BE PLASTERED

The butyl compound is covered with a polypropylene fabric that can be plastered.

SPECIAL BUTYL MIX

Thanks to its special modified butyl formulation, it ensures excellent durability even when subjected to thermal stress.

COMPOSITION

support

non-woven PP fabric

grey adhesive butyl compound

release liner

PP film



Properties	standard	value	USC conversion
Initial Tack	ASTM D 2979	8 N	-
Reaction to fire	EN 13501-1	class E	-
Temperature resistance	-	-30 / +90 °C	-22 / +194 °F
Application temperature	-	0 / +40 °C	+32 / +104 °
Storage temperature ⁽¹⁾	-	+5 / +40 °C	+41 / +104 °
Solvents	-	no	-
VOC emissions	ISO 16000	30 μg/m ³	-
French VOC classification	ISO 16000	A+	-

 $^{(1)}$ Store the product in a cool, dry place for no more than 12 months. Waste classification (2014/955/EU): 08 04 10.


■ CODES AND DIMENSIONS

CODE	liner	В	s	L	liner	В	S	L	
	[mm]	[mm]	[mm]	[m]	[in]	[in]	[mil]	[ft]	
MANPLA2080	20 / 80	100	1	10	0.8 / 3.2	3.9	39	33	6
MANPLA20180	20 / 180	200	1	10	0.8 / 7.1	7.9	39	33	2


■ RECOMMENDATIONS FOR INSTALLATION

SEALING OF CABLES AND CORRUGATED THROUGH PIPES



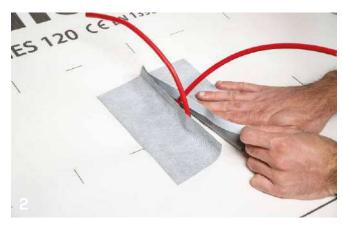



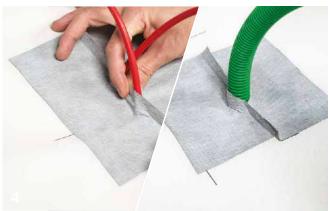

WINDOW NODE - WATERPROOFING BELOW TIE BEAM







TIME SAVING

Thanks to the pre-cut separating film and the product deformation properties, small cables and irregular elements can be sealed without loss of time or accumulation of bulky material.

SMART

Thanks to the pre-cut liner, it is suitable for countless applications, for example around the perimeter of beams and through-beams or for sealing windows.

MANICA FLEX

SEALING SLEEVE FOR CONDUIT AND CABLE **PASSAGE**

COMPLETE RANGE

Available in several variants to ensure tightness in different situations. Available in both sealable TPU and EPDM.

HERMETIC

Ensures airtightness and watertightness for cables and other pass through elements.

COMPOSITION

MANICA FLEX - EPDM

Extruded compact EPDM



MANICA FLEX - TPU

TPU



CODES AND DIMENSIONS

MANICA FLEX - EPDM

CODE	В	S	L	В	S	L	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]	
MANFEPDM100	100	1	10	3.9	39	33	1
MANFEPDM150	150	1	10	5.9	39	33	1

MANICA FLEX - TPU

CODE	В	s	Н	В	S	Н	
	[mm]	[mm]	[mm]	[in]	[mil]	[in]	
MANFTPU300	300	0,4	300	11.8	16	11.8	10
MANFTPU430	430	0,4	430	16.9	16	16.9	10


Waste classification (2014/955/EU): 17 02 03.

■ RECOMMENDATIONS FOR INSTALLATION

MANICA FLEX - EPDM: SEALING OF CABLES AND CORRUGATED TUBES THROUGH PIPES





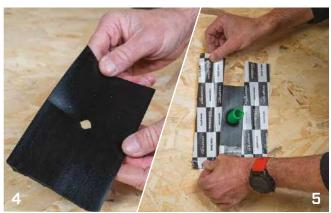




MANICA FLEX - TPU: SEALING OF A THROUGH PIPE







ROLLER, WELD LIQUID

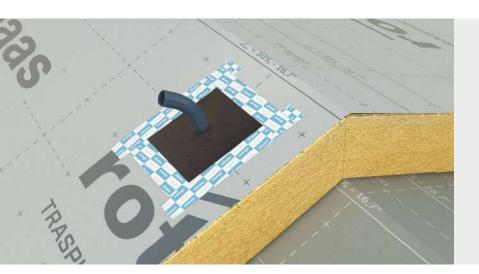

FAST INSTALLATION

Both versions can be quickly sealed with a Rothoblaas tape and can be repositioned. The TPU version can be heat or chemically sealed.

SMART

The EPDM version is supplied in handy rolls, so that you can cut it to the required size without having to order several sizes.

In addition, numerous through elements can be sealed with a single sleeve as it can be perforated at several points as required.

MANICA POST

ADHESIVE SEALING SLEEVE FOR OUTDOORS

- Aluminium coated for permanent UV stability
- Excellent butyl adhesion
- Resistant to thermal stress





CODES AND DIMENSIONS

CODE	В	Н	Ø	В	Н	Ø	colour	
	[mm]	[mm]	[mm]	[in]	[in]	[in]		
MANPOST1	300	200	25 / 32	11.8	7.9	1.0 / 1.3	brown	5
MANPOST2	300	200	42 / 55	11.8	7.9	1.7 / 2.2	brown	5
MANPOST3	230	230	42 / 55	9.1	9.1	1.7 / 2.2	aluminium	4

Waste classification (2014/955/EU): 17 09 04.

MANICA LEAD

LEAD PROFILE WITH EPDM SLEEVE

- Excellent for waterproofing lifeline supports such as TOWER
- It can be used on roofs with different slopes
- Perfectly sealed EPDM sleeve



CODES AND DIMENSIONS

CODE	s	В	L	Ø	S	В	L	Ø	material	
	[mm]	[mm]	[mm]	[mm]	[mil]	[in]	[in]	[in]		
MANEPDM	-	-	-	48	-	-	-	1.9	EPDM	1
MANLEAD	1	310	405	-	39	12.2	15.9	-	lead ⁽¹⁾	1

(1) Avoid contact with skin, eyes and food. Do not produce and breathe dust. Waste classification (2014/955/EU): 17 04 03.

I TUBE STOPPER

CABLE SEALING PLUGS

- For sealing corrugated pipes
- Quick and easy installation
- No special equipment required
- It can be perforated for cable routing









■ CODES AND DIMENSIONS

CODE	Ø	Ø	
	[mm]	[in]	
TUBESTOP20	20	0.8	20
TUBESTOP25	25	1.0	20
TUBESTOP32	32	1.3	20

Waste classification (2014/955/EU): 17 02 03.


I ALPHA

PRESHAPED PROFILE FOR SEALING CORNERS

- Reinforces edges and critical points
- Protects against friction wear
- Double version: for concave and convex corners
- It can be used both on walls and roofs





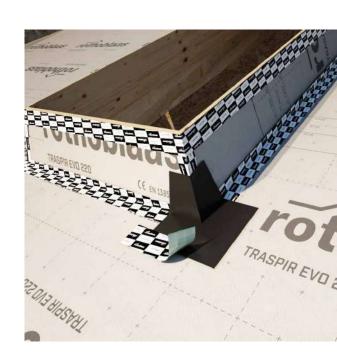

■ CODES AND DIMENSIONS

CODE	В	L	Н	В	L	Н	version	
	[mm]	[mm]	[mm]	[in]	[in]	[in]		
1 ALPHAIN	160	100	100	6.3	3.9	3.9	internal	10
2 ALPHAOUT	180	180	100	7.1	7.1	3.9	external	10

Waste classification (2014/955/EU): 17 02 03.

LITE BAND

ACRYLIC SINGLE-SIDED ADHESIVE TAPE

- Good compromise between versatility and price. Suitable for adhesion to non-woven fabric membranes
- Ideal for sealing and shaping elements to be consolidated with XEPOX



■ CODES AND DIMENSIONS

CODE	В	L	В	L	
	[mm]	[m]	[in]	[ft]	
LITEBAND50	50	50	2.0	164	30



I DGZ







DOUBLE THREADED SCREW FOR INSULATION



■ CODES AND DIMENSIONS

d_1	CODE	Ĺ	pcs
[mm]		[mm]	
	DGZ7220	220	50
7	DGZ7260	260	50
TX 30	DGZ7300	300	50
1 / 30	DGZ7340	340	50
	DGZ7380	380	50
	DGZ9240	240	50
	DGZ9280	280	50
	DGZ9320	320	50
9	DGZ9360	360	50
TX 40	DGZ9400	400	50
	DGZ9440	440	50
	DGZ9480	480	50
	DGZ9520	520	50

Upon request, EVO version is available.



I THERMOWASHER


WASHER TO FASTEN INSULATION TO TIMBER

• Incorporated hole cover to avoid thermal bridges



■ CODES AND DIMENSIONS

CODE	d _{SCREW}	ахbхс	pcs
	[mm]	[mm]	
THERMO65	6/8	65 x 4 x 20	700

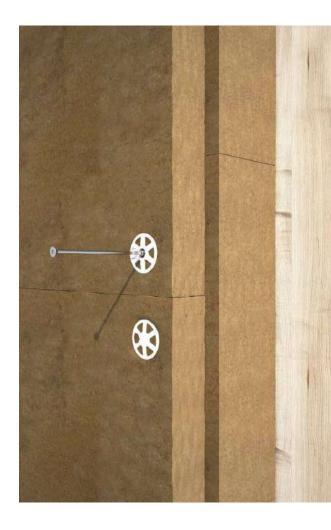

I ISULFIX

ANCHOR FOR FASTENING INSULATION TO BRICKWORK



■ CODES AND DIMENSIONS

CODE	L	d_{HOLE}	d_{HEAD}	Α	pcs
	[mm]	[mm]	[mm]	[mm]	
ISULFIX8110	110			80	250
ISULFIX8150	150	8	60	120	150
ISULFIX8190	190			160	100

CODE	d _{HEAD} [mm]	description	pcs
ISULFIX90	90	additional washer for soft insulation	250

A= maximum fastening thickness



I REACH REGULATION

Registration, Evaluation, Autorisation of Chemicals (CE n. 1907/2006)

It's the European regulation for the management of chemical substances as such or as components of **preparations** (mixtures) and **items** (ref. Art. 3 points 2 and 3). This regulation attributes precise responsibilities to each link of the supply chain regarding the communication and safe use of hazardous substances.

WHAT'S IT FOR?

REACH aims to ensure a high level of human health and environmental protection. The introduction of REACH requires the collection and communication of complete information on the dangers of certain substances and their safe use within the supply chain (regulation CLP 1272/2008).

The regulation provides for continual updating of the information and control by ECHA (the European Chemicals Agency).

In particular, for users, these concepts translate into:

- SVHC Substances Of Very High Concern List of any hazardous substances contained in items
- SDS Safety Data Sheet

 Document that contains the information for correct management of every hazardous mixture



We have added **REACH compliance** among the **selection parameters for our products and production processes.**

In this way, we can guarantee high quality standards in terms of health and environmental protection.

■ REACH COMPLIANCE













PROJECT

Product design and choice of the most suitable materials

PRODUCTION

Start of the production phase with evaluation of the substances used during the entire process.


REACH COMPLIANCE

Analysis/screening on samples to verify REACH compliance.

MARKET

Product meeting the requirements of REACH regulation and Rothoblaas quality standards.

I REACH PROCESS

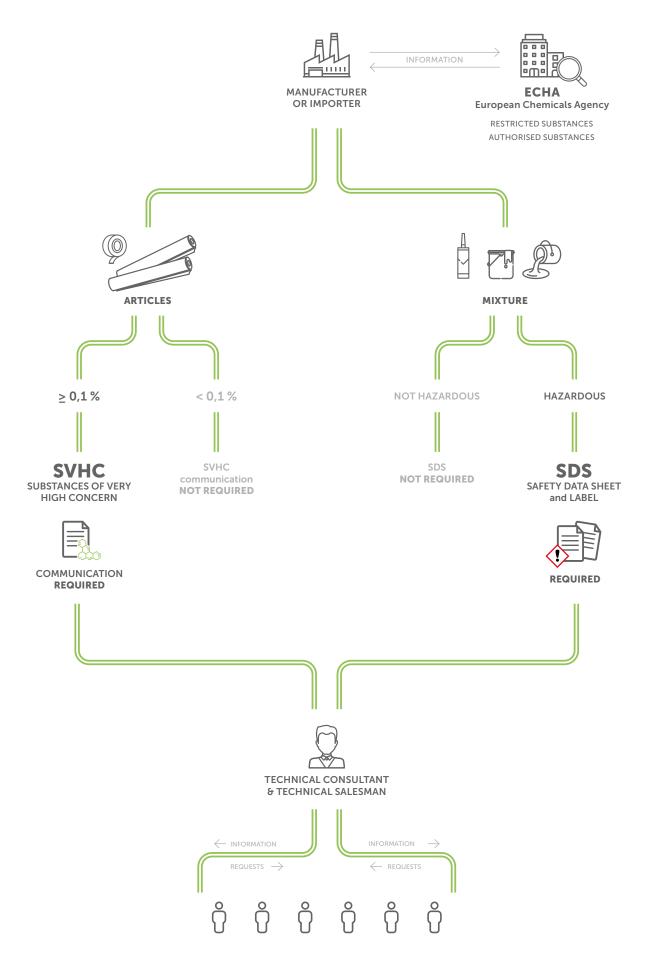

I MEMBRANE GLUE



ADHESIVE GLUE FOR SEALING MEMBRANES

EFFECTIVE

Solvent-free acrylic adhesive, with good adherence to the most common supports.

PRACTICAL

Easily extruded mix, ready to use and easily removed with water prior to hardening.



■ TECHNICAL DATA

Properties	value	USC conversion
Colour	black	-
Composition	acrylic without solvents	-
Density ISO 1183	1,05 - 1,10 g/cm ³	0.60 - 0.64 oz/in ³
Time required for drying 25 °C / 50 %RH	24 - 72 hours	-
Temperature resistance once hardened	-20 / +80 °C	-4 / 176 °F
Application temperature (cartridge and ambient)	+5 / +40 °C	+41 / 104 °F
Application temperature (support)	-5 / +40 °C	+23 / 104 °F
Emicode (GEV test procedure)	EC1 plus	-
VOC content	0,34% - 5,7 g/L	-
Transport temperature	-20 °C / +35 °C	-4 °F / 95 °F
Storage temperature ⁽¹⁾	+5 °C / +25 °C	+41 °F / 77 °F

⁽¹⁾ Store the product in a dry, covered location for no more than 12 months. Check the expiry date on the packaging. Waste classification (2014/955/EU): 08 04 10.

CODES AND DIMENSIONS

CODE	content	yield of the glue line Ø8 mm	content	yield of the glue line Ø8 mm	version	
	[mL]	[m]	[US fl oz]	[ft]		
MEMBRAGLUE310	310	6	10.48	20	rigid cartridge	24
MEMBRAGLUE600	600	11,6	20.29	38	soft cartridge	20



EMICODE EC1 PLUS

Thanks to the special formulation, the glue achieves the highest level of safety with regard to emissions that are harmful to health.

OUICK DRYING

It offers a good compromise between adhesion and fast drying of the outer film, allowing application on vertical surfaces without slipping problems.

EUH208 Contains CAS 55965-84-9 (3:1), CAS 2634-33-5. May produce an allergic reaction.

I ECO GLUE







ADHESIVE GLUE FOR SEALING MEMBRANES ON BIOLOGICAL BASIS

ECOLOGICAL

The compound contains approximately 47 % bio-based carbon (according to ASTM 6866), for greater environmental sustainability.

EMICODE EC1 PLUS

Thanks to the special formulation, it achieves the highest level of safety with regard to emissions that are harmful to health.



■ TECHNICAL DATA

Properties	value	USC conversion
Colour (wet/dry)	white cream/beige	-
Density EN 542 +20 °C	approx. 1,15 g/cm ³	0.67 oz/in ³
Film formation time	permanently adhesive	-
Time required for drying 20 °C / 50 %RH	36 h	-
Temperature resistance once dried	from -30 °C to +80 °C	from -22 °F to +176 °F
Application temperature (cartridge)	from $+5$ °C to $+30$ °C	from +41 °F to +86 °F
Application temperature (ambient and support)	from -5 °C	from 23 °F
Solvents	no	-
Emicode (GEV test procedure)	EC1 plus	-
French VOC classification	A+	-
Transport temperature	- 30 °C to +35 °C	-22 °F / +95 °F
Storage temperature ⁽¹⁾	+15 °C to +25 °C	+59 °F / +77 °F

 $^{^{(1)}}$ Store the product in a cool, dry place for no more than 18 months. Check the expiry date on the cartridge. Waste classification (2014/955/EU): 08 04 10.

EUH208 Contains CAS 55965-84-9 (3:1), CAS 2634-33-5. May produce an allergic reaction; EUH210 Safety data sheet available on request

■ CODES AND DIMENSIONS

CODE	content	yield of the glue line Ø8 mm	content	yield of the glue line Ø8 mm	version	
	[mL]	[m]	[US fl oz]	[ft]		
ECOGLUE310	310	6,2	10.48	20	rigid cartridge	20
ECOGLUE600	600	11,9	20.29	39	soft cartridge	20



COMPLETE SYSTEM

Together with VAPOR IN GREEN 200 it creates a more environmentally sustainable airtight layer.

DURABLE | DIN 4108-11

The glue has passed the artificial ageing test according to DIN 4108-11, which guarantees durability over time.

I SUPERB GLUE





HIGH ELASTICITY ADHESIVE GLUE FOR **SEALING MEMBRANES**

HIGH PERFORMANCE

Adhesion and elasticity stable over time, free of solvents and harmful substances. Storage and use at low temperatures possible.

MAXIMUM ELASTICITY

Formula designed to ensure elasticity and adhesion even after drying.



■ TECHNICAL DATA

Properties	value	USC conversion
Colour (wet)	light blue	-
Colour (dry)	transparent blue	-
Composition	modified acrylate-polymer dispersion	-
Density EN 542 +20 °C	approx. 1,02 g/cm ³	0.59 oz/in ³
Yield with strip Ø8 mm (cartridge 310 mL)	6,2 m	20.34 ft
Yield with strip Ø8 mm (cartridge 600 mL)	11,9 m	39.04 ft
Film formation time	permanently adhesive	-
Time required for drying 20 °C / 50 %RH	48 hours	-
Temperature resistance once dried	-30 / +80 °C	-22 / +176 °F
Application temperature (cartridge)	+5 / +30 °C	-13 / +86 °F
Application temperature (ambient)	-5 °C	23 °F
Application temperature (support)	+5 / +30 °C	-13 / +86 °F
Solvents	no	-
Emicode (GEV test procedure)	EC1 plus	-
French VOC classification	A+	-
Transport temperature	-30 °C / +40 °C	-22 °F / +104 °F
Storage temperature ⁽¹⁾	+5 °C / +25 °C	+41 °F/ +77 °F
Storage time ⁽²⁾	up to 24 months	-

⁽¹⁾Store the product in a dry, covered location.

EUH208 Contains CAS 55965-84-9 (3:1), CAS 2634-33-5. May produce an allergic reaction; EUH210 Safety data sheet available on request.


CODES AND DIMENSIONS

CODE	content [mL]	content [US fl oz]	version	
SUPERBGLUE310	310	10.48	rigid cartridge	20
SUPERBGLUE600	600	20.29	soft cartridge	20

⁽²⁾ Check the expiry date on the cartridge.

Waste classification (2014/955/EU): 08 04 10.


■ GLUE PROPERTIES

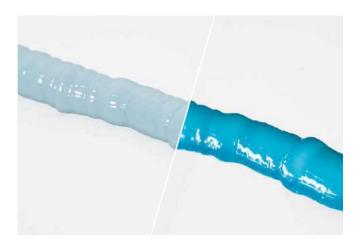







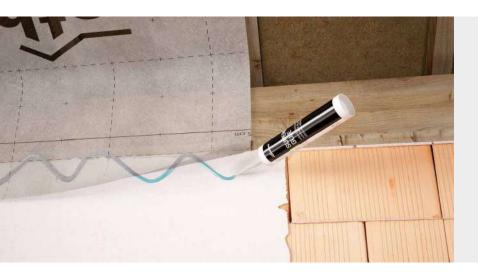

PERMANENT ADHESION | DIN 4108-11

The glue is tested for elastic and durable seals using DIN tests.

EMICODE EC1 PLUS

Thanks to the special formulation, it achieves the highest level of safety with regard to emissions that are harmful to health.

I RECOMMENDATIONS FOR INSTALLATION: INDOOR GLUES


MEMBRANE CONNECTION TO WALL - CONCRETE





MEMBRANE CONNECTION TO ROOF - CONCRETE



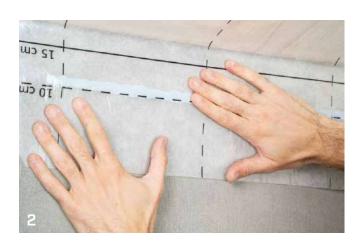


MEMBRANE CONNECTION TO ROOF - OSB





MEMBRANE OVERLAP SEALING



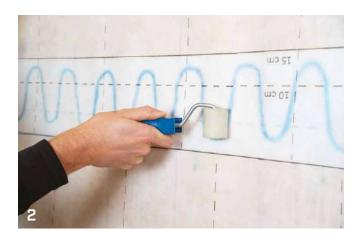

WINDOW HOLE SEALING





PLASTER BAND LITE

MEMBRANE CONNECTION TO WALL - CONCRETE





1 PRIMER, PRIMER SPRAY

I OUTSIDE GLUE

HIGH ELASTICITY UNIVERSAL ADHESIVE GLUE FOR EXTERNAL USE



ELASTIC

The butyl composition offers high joint elasticity over time, even in the case of small deformations or movements.

UNIVERSAL

Guarantees sealing and attachment to the most common materials, including damp or wet supports.



TECHNICAL DATA

Properties	value	USC conversion
Colour	grey	-
Composition	butyl rubber	-
Density	1,39 g/mL	222.9 oz/gal
Yield with strip Ø8 mm (cartridge 310 mL)	approx. 6 m	approx. 19.69 ft
Yield with strip Ø8 mm (cartridge 600 mL)	approx. 12 m	approx. 39.37 ft
Film formation time 20 °C / 50 %RH	20 - 30 min	-
Time required for complete hardening 20 °C / 50 %RH	4 - 6 weeks	-
Temperature resistance once hardened	-25 / +70 °C	-13 / +158 °F
Application temperature (cartridge)	+5 / +40 °C	-13 / +158 °F
Application temperature (ambient)	+5 / +40 °C	-13 / +158 °F
Application temperature (support)	+5 / +40 °C	-13 / +158 °F
Watertightness after hardening	conforming	-
Transport temperature	+5 / +30 °C	-13 / +86 °F
Storage temperature ⁽¹⁾	+5 / +25 °C	-13 / +77 °F
Storage time ⁽²⁾	up to 12 months	-

⁽¹⁾ Store the product in a dry, covered location.

(2) Check the expiry date on the cartridge. Waste classification (2014/955/EU): 08 04 10.

EUH066 Repeated exposure may cause skin dryness or cracking. EUH210 Safety data sheet available on request.

CODES AND DIMENSIONS

CODE	content [mL]	content [US fl oz]	version	
OUTGLUE310	310	10.48	rigid cartridge	24
OUTGLUE600	600	20.29	soft cartridge	12

■ FIELDS OF APPLICATION











WATER AND UV RESISTANT


The product offers excellent UV stability and is also suitable for sealing in the event of the presence of water during installation without the need for drying time.

DURABILITY


The modified butyl mix allows the product to remain elastic over time without altering its hermetic properties, even under high thermal stress.

I APPLICATION SETTINGS


VENTILATED CLT ROOF

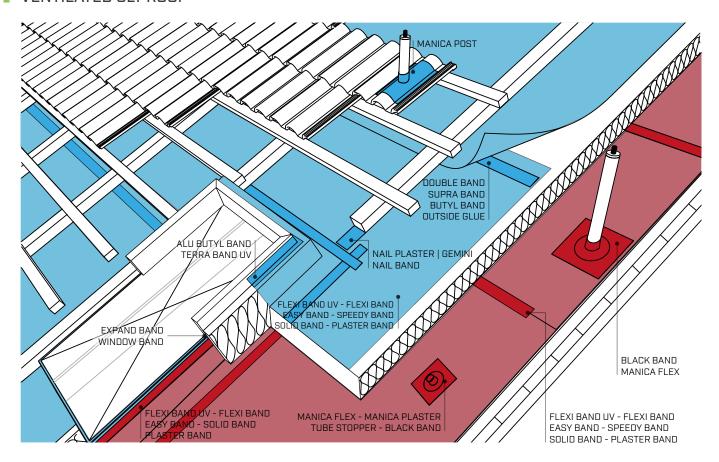


FRAME ROOF ON MASONRY WALL

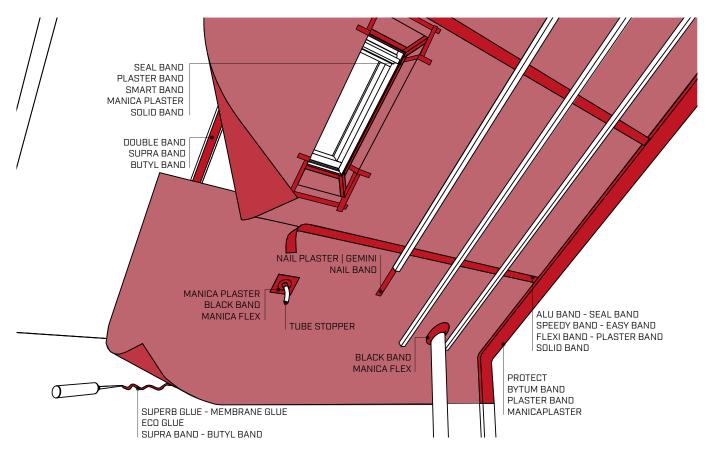

CLT STRUCTURE WITH VENTILATED WALL

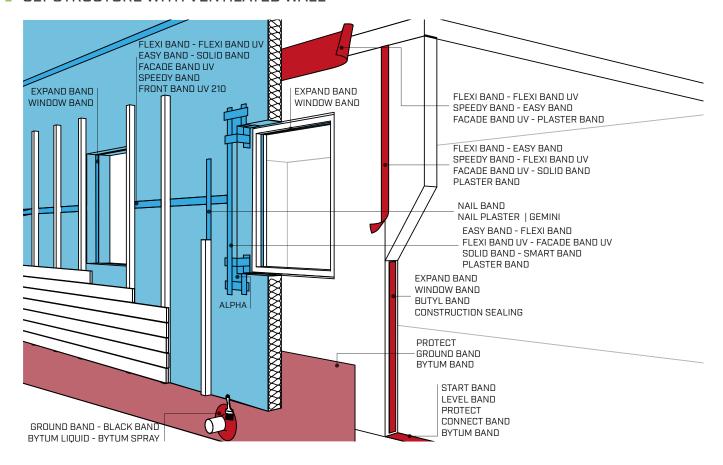


■ FRAME WALL WITH WINDOW

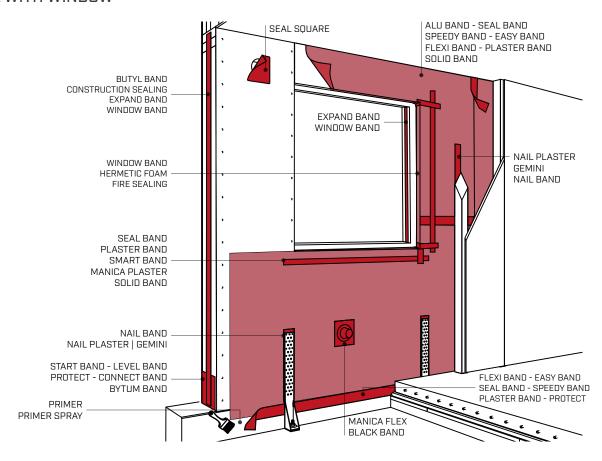


I APPLICATION SETTINGS


■ RECOVERY OF A TIMBER ROOF

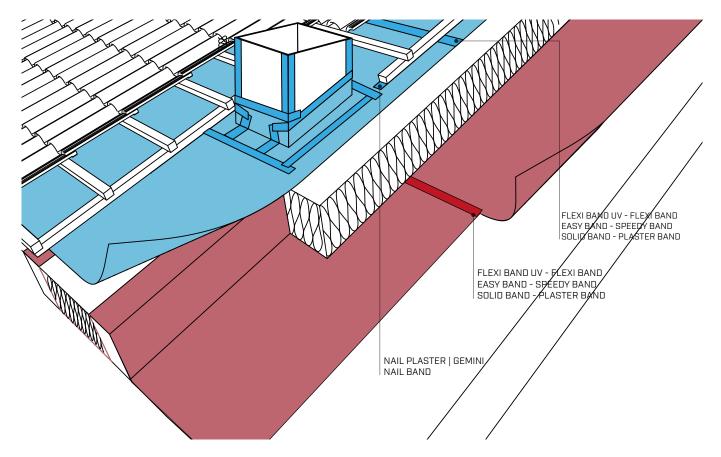


■ CONCRETE AND MASONRY ROOF

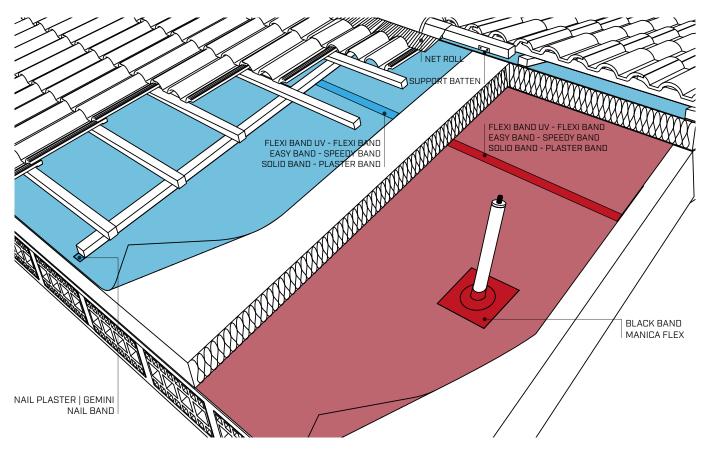

■ TIMBER FRAME STRUCTURE

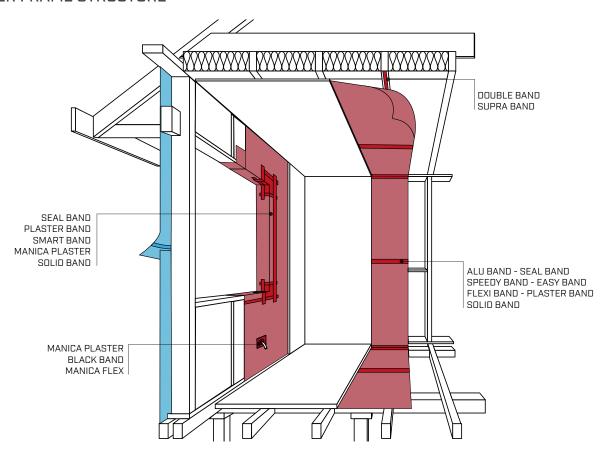

STEEL FRAME WITH BRICK CLADDING

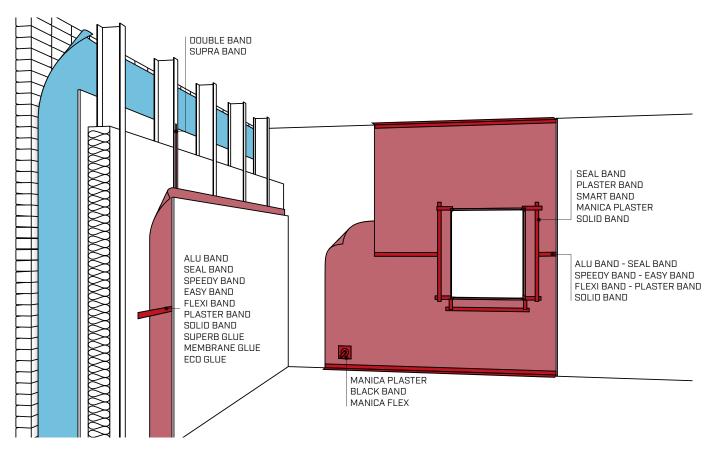

ROOF AND VENTILATION ELEMENTS

ROOF AND VENTILATION ELEMENTS


I ROOF AND VENTILATION **ELEMENTS**

NET ROLL FLEXIBLE VENTILATED UNDER-RIDGE
STANDARD ROLL FLEXIBLE VENTILATED UNDER-RIDGE
METAL ROLL FLEXIBLE VENTILATED ALUMINIUM UNDER-RIDGE
BRUSH VENT RIGID UNDER-RIDGE WITH SIDE BRUSHES
PEAK VENT AISI 430 RIGID UNDER-RIDGE KIT
PEAK ONE VENTILATED UNDER-RIDGE FOR SINGLE PITCH
PEAK EASY VENTILATED RIGID RIDGE ROLL
PEAK HOOK RIDGE FASTENING HOOK FOR FLAT AND SHAPED TILES
SUPPORT BATTEN METAL BATTEN-HOLDERS
ALU FLASH CONNECT ALUMINIUM AND SELF-ADHESIVE BUTYL VERSION
SOFT FLASH CONNECT EPDM AND BUTYL SELF-ADHESIVE VERSION
MANICA ROLL SELF-ADHESIVE LEAD AND BUTYL VERSION
GUTTER FLASHING
VALLEY ALU STRENGTHENING ELEMENT FOR VALLEYS
GASKET GASKET FOR VALLEY
SNOW STOP SNOW STOPPER HOOK FOR RIDGE TILES AND TILES 181
TILE STOP S S PRE-SHAPED HOOKS FOR PLAIN TILES
TILE STOP L L PRE-SHAPED HOOKS FOR PLAIN TILES
TILE STOP WIND PRE-SHAPED BRACING HOOKS FOR TILES
TILE STOP WIND COPPO PRE-SHAPED BRACING HOOKS FOR RIDGE TILES


VENT MESH FLEXIBLE VENTILATION GRID
VENT GRILLE PVC VENTILATION GRID
VENT FOLD PRE-BENT GRID FOR VENTILATION. 187
BIRD SPIKE RIGID BIRD SPIKES
BIRD COMB STANDARD EAVES BIRD COMBS
BIRD COMB EVO TWIN ROW EAVES BIRD COMB
VENT SHAPE VENTILATION GRID FOR ROOFS MADE OF TILES OF VARIOUS SHAPE
RAIN TUBE TEMPORARY DOWNPIPE FOR CONSTRUCTION SITE PHASES

VENTILATION AND ROOF


Many factors need to be taken into account when designing and building a safe, healthy and durable roof.

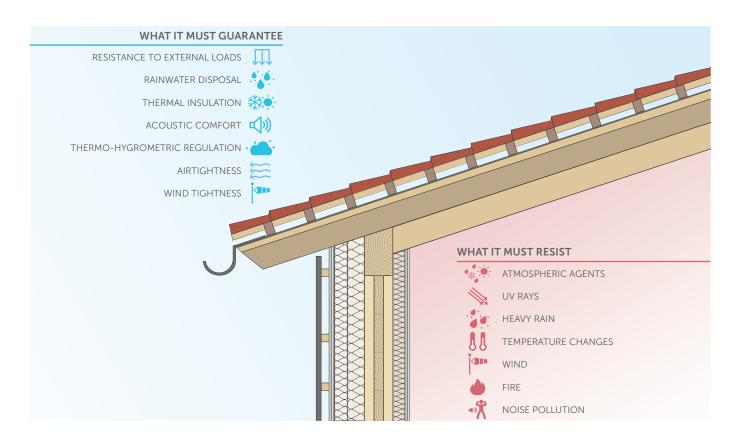


VENTILATION AND MICRO-VENTILATION




The micro-ventilation created under the tiles is favoured by the geometry of the tile itself. It is sufficient for disposing of excess humidity.



Ventilation under the roof is achieved by means of tile-holder battens and, in addition to disposing of humidity, it ensures the removal of excessive heat accumulated.




For a micro-ventilated roof, it is advisable to ensure a gap with a section of at least 200 cm² for each linear metre of pitch.




For a ventilated roof, it is advisable to ensure a gap with a section varying from a minimum of 400 cm² to a maximum of 800 cm² per linear metre of pitch.

TYPES OF ROOFS


Several factors determine this aspect: the construction tradition of the place where the roof is built, the experience of the builder and the specific requirements of the client.

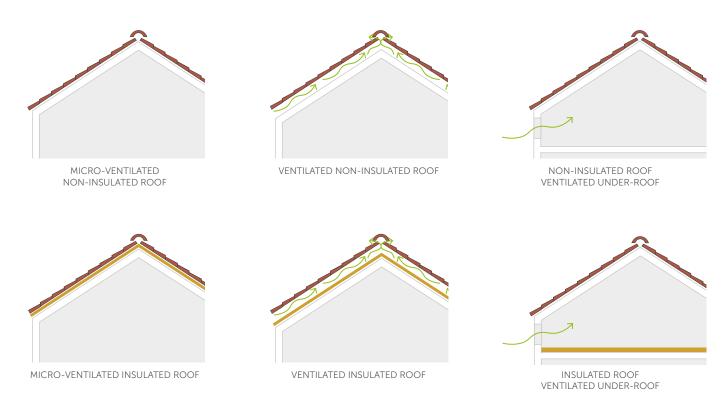


THE ADVANTAGES OF GOOD VENTILATION



Good ventilation helps the water vapour inside the building envelope to dry, preventing the formation of interstitial condensation at the insulation and of the structure.



In winter, ventilation makes snow that may have accumulated on the roof to melt evenly, preventing it from slipping uncontrollably.



During the warmer months, ventilation removes some of the thermal energy stored under the roof, contributing to improved housing comfort.



The ventilation layer offers additional protection in the event of accidental infiltration, as it creates a second layer of water flow and prevents water from stagnating.

DESIGNVENTILATION

WHAT IS THE CHIMNEY EFFECT?

In order for a hot air balloon to fly and overcome the force of gravity, the density of the air inside the envelope must be reduced. How? Warming it up.


The density of confined air will be lower than the density of the outside air and the balloon will tend to rise upwards.

The same phenomenon occurs in ventilated roofs and is known as the "chimney effect".




HOW VENTILATION TAKES PLACE


Solar radiation heats the bent tiles. The ventilation chamber underneath acts as an "air cushion", preventing the direct passage of heat to the lay-

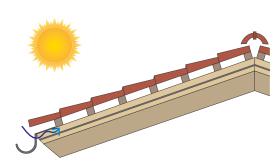


The air heated in the ventilation chamber, which is less dense than unheated air, rises upwards, also driven by the outside air entering through the eaves openings.

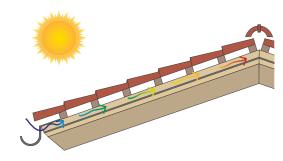

Then air leaves the ridge and mixes with the ambient air. This creates a vacuum inside the air chamber causing it to "empty". The lower pressure inside the chamber causes unheated outside air to be drawn in.

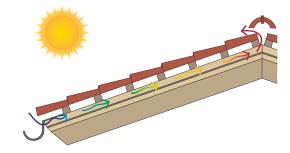


The air coming out of the ridge line creates a vacuum in the air chamber, inducing a draught of unheated outdoor air, which is transported into the ventilation chamber.

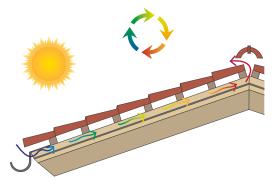


LOCATION OF OPENINGS

To ensure that the ventilation cycle occurs without interruption it is essential to:

- create a proper air inlet near the gutter;
- ensure proper air outlet at the ridge line.

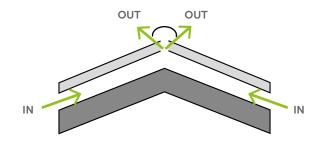


GUTTER

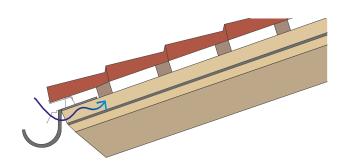

The most effective way to achieve a proper air inlet near the gutter is to use all those products that allow air to enter but protect the roof from intrusion by birds and small animals. The solutions offered by Rothoblaas include the ventilation grilles and eaves bird combs illustrated in this chapter.

RIDGE LINE

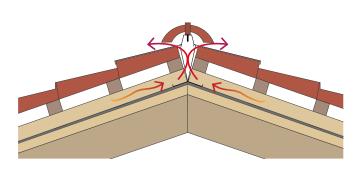

Solutions that allow air to pass through must be used in order to achieve a proper air inlet near the ridge line. Rothoblaas offers rigid or flexible ventilated under-ridges.


INSTALLATION AND MAINTENANCE




Protect air inlets and outlets from insects and birds, minimising section obstruction.



Check that the gutter and ridge are free of obstacles that could impede air circulation.



Ensure water and snow transported by the wind near the ridge is sealed out.



Avoid battening or other impediments that could block the upward flow of air heated along the slope.

RIDGE

NET ROLL

FLEXIBLE VENTILATED UNDER-RIDGE

FLEXIBLE

The polypropylene ventilation fabric ensures excellent adaptability during installation.

DOUBLE SECURITY

The ventilation strip, which is sewn and glued to the pleated wings, guarantees that the solution remains intact during installation and continues to be effective over time.



TECHNICAL DATA

Properties	value	USC conversion
Air passage	approx. 150 cm²/m	7.09 in ² /ft
Elongation capacity (pleated aluminium strips)	approx. 45 %	-
Butyl tape width	15 mm	0.6 in
Butyl tape thermal resistance	-40 / +90 °C	-40 / +194 °F
Application temperature	+5 / +40 °C	+41 / +104 °F
UV resistance (aluminium straps)	permanent	-
Storage temperature ⁽¹⁾	+5 / +30 °C	+41 / +86 °F

 $[\]ensuremath{^{(1)}}$ Keep the product in a dry, covered location. Waste classification (2014/955/EU): 17 09 04.

CODES AND DIMENSIONS

CODE	В	L	В	L	colour	RAL	
	[mm]	[m]	[in]	[ft]			
NETRED310	310	5	12.2	16	brick red	8004	4
NETBRO310	310	5	12.2	16	brown	8019	4
NETBLA310	310	5	12.2	16	black	9005	4
NETRED390	390	5	15.4	16	brick red	8004	4
NETBRO390	390	5	15.4	16	brown	8019	4
NETBLA390	390	5	15.4	16	black	9005	4
NETRED39020	390	20	15.4	66	brick red	8004	1
NETBRO39020	390	20	15.4	66	brown	8019	1
NETBLA39020	390	20	15.4	66	black	9005	1



EASY TO SHAPE

Aluminium straps and butyl tape ensure adaptability to the profile of the roof elements.

MATERIALS

Aluminium, PP non-woven fabric, butyl tape.

STANDARD ROLL

FLEXIBLE VENTILATED UNDER-RIDGE

ADJUSTABLE

The polypropylene fabric ensures excellent flexibility during installation and a high aeration surface.

COST/PERFORMANCE

The adhesive butyl tape offers excellent adhesion on ridge tiles and tiles.



CODES AND DIMENSIONS

CODE	В	L	В	L	colour	RAL	
	[mm]	[m]	[in]	[ft]			
STANDRED390	390	5	15.4	16	brick red	8004	4
STANDBRO390	390	5	15.4	16	brown	8019	4
STANDANT390	390	5	15.4	16	anthracite	7021	4

Waste classification (2014/955/EU): 17 09 04.









METAL ROLL

FLEXIBLE VENTILATED ALUMINIUM UNDER-RIDGE

EXCELLENT ADHESION

The special 4 cm wide butyl tape ensures strong and immediate adhesion to various surfaces.

DURABILITY

The choice of metal material ensures excellent UV stability even in harsh climate zones.



TECHNICAL DATA

Properties	value	USC conversion
Material	aluminium, butyl	-
Butyl tape width	40 mm	1.57 in
Butyl tape adhesion property	> 19 N/cm	1.68 lb/in
UV resistance	permanent	-
Application temperature	+5 / +30 °C	+41 / +86 °F
Temperature resistance	-30 / +90 °C	-22 / +194 °F
Storage temperature ⁽¹⁾	0 / +25 °C	+32 / +77 °F

 $^{^{(1)}}$ Keep the product in a dry, covered location. Waste classification (2014/955/EU): 17 09 04.

CODES AND DIMENSIONS

CODE	В	L	В	L	colour	RAL	
	[mm]	[m]	[in]	[ft]			
METRED400	400	5	15.8	16	brick red	8004	4
METBRO400	400	5	15.8	16	brown	8017	4
METANT400	400	5	15.8	16	anthracite	7021	4









BRUSH VENT

RIGID UNDER-RIDGE WITH SIDE BRUSHES

FAST INSTALLATION

Thanks to its soft bristles, it adapts easily to the profile of the cover without the need for shaping.

PROTECTION

The bristles provide effective protection against the intrusion of water and foreign elements.



TECHNICAL DATA

Properties	value	USC conversion
Material	PVC	-
Screen length	60 mm	2.36 in
Air passage	≥ 200 cm ² /m	≥ 9.45 in²/ft
UV resistance	permanent	-
Temperature resistance	-20 / +80 °C	-4 / +176 °F

Waste classification (2014/955/EU): 17 02 03.

CODES AND DIMENSIONS

CODE	В	Н	L	В	Н	L	colour	RAL	
	[mm]	[mm]	[m]	[in]	[in]	[ft]			
BRUVENRED175	175	75	1	6.9	3.0	3	brick red	8004	20
BRUVENBRO175	175	75	1	6.9	3.0	3	brown	8019	20
BRUVENBLA175	175	75	1	6.9	3.0	3	black	9005	20









RIDGE

PEAK VENT AISI 430


RIGID UNDER-RIDGE KIT

HIGH-PERFORMANCE SOLUTION

Ready to use kit, including under-ridge, screws and adjustable brackets.

PERMANENT UV STABILITY

The robust stainless steel grid and pleated aluminium wings guarantee constant ventilation, stable over time.

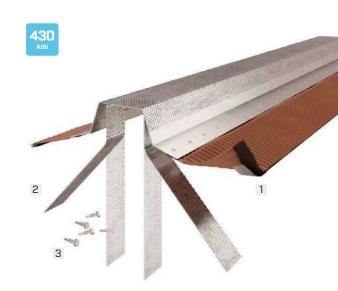

TECHNICAL DATA

Properties	value	USC conversion
Butyl tape width	20 mm	0.8 in
Air passage	500 cm ² /m	23.63 in ² /ft
Butyl thermal resistance	-40 / +90 °C	-40 / +194 °F
Application temperature	+5 / +40 °C	+41 / +104 °F
UV resistance	permanent	-
Water tightness (when installed under tiles)	conforming	-
Storage temperature	+5 / +30 °C	+41 / +86 °F

Waste classification (2014/955/EU): 17 09 04.

For the installation, as many brackets and ventilation elements as linear metres of ridge must be used, with the addition of an initial support bracket. In addition, at least four screws must be provided for each bracket, two for fixing it to the battens and two for fixing the ventilation element to the bracket.

EXAMPLE: if my ridge measures 5 linear metres, I will need 5 ventilation elements + 6 support brackets and 24 self-drilling screws.

CODES AND DIMENSIONS

	CODE	В	L	Н	В	L	Н	colour	RAL	
		[mm]	[m]	[mm]	[in]	[ft]	[in]			
1	PVENTREDI380	400	1	-	15.8	3	-	brick red	2001	5
1	PVENTBLAI380	400	1	-	15.8	3	-	black	9005	5
2	PVENTPLATE	50	-	230	2.0	-	9.01	steel	-	72
3	PVENTSCREW	Ø 5,5	-	13	Ø 0.2	-	0.5	steel	-	20



EFFECTIVE

The perforation of the linear element and support brackets ensures perfect ventilation over time, without the need for additional supports.

MATERIALS

Stainless steel, pre-painted aluminium, butyl tape.

RECOMMENDATIONS FOR INSTALLATION









PEAK ONE VENTILATED UNDER-RIDGE FOR SINGLE PITCH

- 2 cm butyl tape
- High quality material
- For ventilation of pitches against a vertical wall



CODES AND DIMENSIONS

CODE	B ⁽¹⁾	L	B(1)	L	material	colour	RAL	
	[mm]	[m]	[in]	[ft]				
PEAKONE165	165	1	6.5	3	galvanized metal sheet and aluminium	brown and brick red	8017 and 8004	3

(1) Aluminium strap length.

Waste classification (2014/955/EU): 17 04 07.

RIDGE

PEAK EASY

VENTILATED RIGID RIDGE ROLL

DURABLE

The choice of metal material ensures excellent UV stability even in harsh climate zones.

FAST INSTALLATION

Quick and easy to install, it adapts to any ridge line.



TECHNICAL DATA

Properties	value	USC conversion
Material	aluminium, butyl	-
Canopy width	160 mm	6.3 in
Butyl tape width	15 mm	0.6 in
Air passage	$> 230 \text{ cm}^2/\text{m}$	10.87 in ² /ft
Strap elongation	40%	-
Butyl thermal resistance	-30 / +80 °C	-22 / +176 °F
Application temperature	+5 / +30 °C	+41 / +86 °F
UV resistance	permanent	-
Water tightness (when installed under tiles)	conforming	-
Storage temperature	0 / +25 °C	+32 / +77 °F

Waste classification (2014/955/EU): 17 09 04.

CODES AND DIMENSIONS

CODE	В	L	В	L	colour	RAL	
	[mm]	[m]	[in]	[ft]			
PEAKEASY400	400	1	15.7	3	brick red	8004	20









PEAK HOOK


RIDGE FASTENING HOOK FOR FLAT AND SHAPED TILES

FAST DRY INSTALLATION

For installing the ridge without foam or mortar, in accordance with

COMPLETE RANGE

Available in different versions and colours to suit different types of roofs.

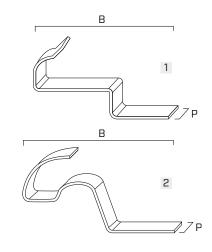





CODES AND DIMENSIONS

	CODE	В	Р	В	Р	version	material	colour	RAL	
		[mm]	[mm]	[in]	[in]					
	PUNIRED	115	18	4.5	0.7	universal	aluminium	brick red	8004	50
1	PUNIBRO	115	18	4.5	0.7	universal	aluminium	brown	8017	50
	PUNIANT	115	18	4.5	0.7	universal	aluminium	anthracite	7021	50
	PCURRED	80	18	3.2	0.7	shaped	aluminium	brick red	8004	50
2	PCURBRO	80	18	3.2	0.7	shaped	aluminium	brown	8017	50
	PCURANT	80	18	3.2	0.7	shaped	aluminium	anthracite	7021	50

Waste classification (2014/955/EU): 17 04 02.





SUPPORT BATTEN

METAL BATTEN-HOLDERS

STABLE AND ADJUSTABLE

The different models are adjustable in height and available in various sizes to ensure the stability of the roof ridge without the need for foam or mortar.

4 VERSIONS

Wide range with different fixing and adjustment methods depending on the type of ridge and the thickness to be compensated for by the batten.










CODES AND DIMENSIONS

	CODE	H ⁽¹⁾	В	H ⁽¹⁾	В	version	material	
		[mm]	[mm]	[in]	[in]			
1	SUPPORTUNI	210	50	8.3	2.0	universal	DX51D steel	50
2	SUPPORTNAIL	280	50	11.0	2.0	with nail	DX51D steel	50
3	SUPPORTSCREW	260	50	10.2	2.0	with screw	DX51D steel	50
4	SUPPORTLEVEL	210 - 240	50	8.3 - 9.5	2.0	adjustable	DX51D steel	50

⁽¹⁾ Total height.

Waste classification (2014/955/EU): 17 04 05.

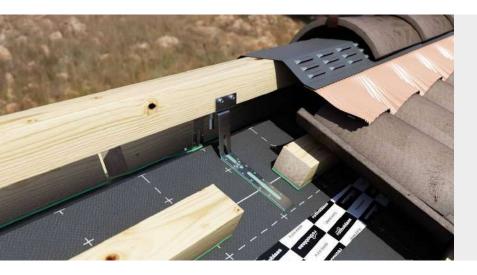

VERSATILE

It can be adapted to any type of roof and be fixed on the most common rigid supports such as wood or concrete.

MATERIAL

Made of steel for perfect durability and weather resistance.

RECOMMENDATIONS FOR INSTALLATION

1 SUPPORTUNI






2 SUPPORTNAIL





3 SUPPORTSCREW

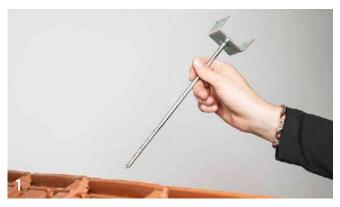



4 SUPPORTLEVEL





CHIMNEY CONNECTION

ALU FLASH CONNECT

ALUMINIUM AND SELF-ADHESIVE BUTYL VERSION

- Butyl adhesive adheres perfectly, creating a durable watertight seal
- It can be cut with a cutter or scissors
- Excellent UV and weather resistance



CODE	В	s	L	В	S	L	cladding	colour	RAL	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]				
ALURRED300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	brick red	8004	1
ALURBRO300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	brown	8019	1
ALURBLA300	300	2	5	11.8	79	16.40	aluminium 0,12 mm	black	9004	1

Waste classification (2014/955/EU): 17 09 04.

SOFT FLASH CONNECT

EPDM AND BUTYL SELF-ADHESIVE VERSION

- Permanent UV stability
- Extremely flexible 3D surface
- It can be modelled by hand without special tools



CODE	В	s	L	В	S	L	cladding	colour	RAL	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]				
SOFTRRED300	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	brick red	8004	1
SOFTRBRO300	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	brown	8019	1
SOFTRBLA300	300	2,5	5	11.8	98	16.40	EPDM 1,5 mm	black	9004	1

Waste classification (2014/955/EU): 17 02 03.

MANICA ROLL

SELF-ADHESIVE LEAD AND BUTYL VERSION

- Smooth, perfectly malleable surface
- Permanent UV stability
- Excellent weather resistance



CODE	В	s	L	В	S	L	cladding	colour	RAL	
	[mm]	[mm]	[m]	[in]	[mil]	[ft]				
MANROLL1	300	1,5	5	11.8	59	16.40	lead 0,5 mm	brick red	8004	1
MANROLL2	300	1,5	5	11.8	59	16.40	lead 0,5 mm	brown	8017	1
MANROLL3	300	1,5	5	11.8	59	16.40	lead 0,5 mm	dark brown	8019	1
MANROLL4	300	1,5	5	11.8	59	16.40	lead 0,5 mm	black	9005	1
MANROLL5	300	1,5	5	11.8	59	16.40	lead 0,5 mm	graphite	7016	1

Avoid contact with skin, eyes and food. Do not produce and breathe dust.

RECOMMENDATIONS FOR INSTALLATION









GUTTER FLASHING



- Resistant to UV rays
- With polyester paint, protected by protective film

CODE	В	L	В	L	material	colour	RAL	
	[mm]	[m]	[in]	[ft]				
GUTRED80 ⁽¹⁾	80	2	3.1	7	aluminium	brick red	8004	20
GUTBRO80(1)	80	2	3.1	7	aluminium	brown	8019	20
GUTBLA80 ⁽¹⁾	80	2	3.1	7	aluminium	black	9005	20

(1)Products available only upon order. Waste classification (2014/955/EU): 17 04 02.



ADJUSTABLE

The special adhesive butyl mix offers strong adherence, even on rough surfaces.

MATERIAL

Aluminium, EPDM and lead guarantee durability.

EAVES GUTTER

VALLEY ALU

STRENGTHENING ELEMENT FOR VALLEYS

- Quick and easy installation
- Weather resistance



CODES AND DIMENSIONS


CODE	В	L	В	L	colour	RAL	
	[mm]	[m]	[in]	[ft]			
VALLEYRED500	500	6	19.7	20	brick red	8004	1
VALLEYBRO500	500	6	19.7	20	brown	8017	1

Waste classification (2014/955/EU): 17 04 05.

GASKET

GASKET FOR VALLEY

- Made of polyurethane foam
- Self-adhesive, ideal for quick installation
- Adapts to all roof shapes for optimal and permanent watertightness

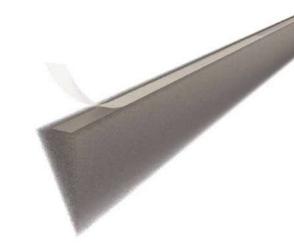

CODES AND DIMENSIONS

CODE	В	Н	L	В	Н	L	colour	RAL	
	[mm]	[mm]	[m]	[in]	[in]	[ft]			
GASKETANT60	30	60	1	1.2	2.4	3	anthracite	7021	200

Waste classification (2014/955/EU): 17 02 03.



COMPLETE SYSTEM

The VALLEY ALU and GASKET solution provides excellent and durable protection of the valley.

MATERIAL

Made of aluminium, it provides safe and durable protection.

SNOW PROTECTION

SNOW STOP

SNOW STOPPER HOOK FOR RIDGE TILES AND TILES

STABLE

Stable mechanical fixing prevents accumulated snow falls.

COMPLETE RANGE

Available for ridge, Marseille and Portuguese type tiles in different colours.



CODES AND DIMENSIONS

CODE	Н	В	Р	Н	В	Р	version	material	colour	RAL	
	[mm]	[mm]	[mm]	[in]	[in]	[in]					
SSTOPREDUNI	65	300	30	2.6	11.8	1.2	cement and roof tile	pre-painted metal sheet	brick red	8004	40
SSTOPBROUNI	65	300	30	2.6	11.8	1.2	cement and roof tile	pre-painted metal sheet	brown	8017	40
SSTOPREDPOR	65	300	30	2.6	11.8	1.2	Portuguese roof tile	pre-painted metal sheet	brick red	8004	40
SSTOPBROPOR	65	300	30	2.6	11.8	1.2	Portuguese roof tile	pre-painted metal sheet	brown	8017	40
SSTOPREDFLAT	65	280	30	2.6	11.0	1.2	Canadian tile, metal roofing	pre-painted metal sheet	brick red	8004	40
SSTOPBROFLAT	65	280	30	2.6	11.0	1.18	Canadian tile, metal roofing	pre-painted metal sheet	brown	8017	40
SSTOPLBRO	55	130	40	2.17	5.1	1.6	tile	pre-painted metal sheet	brown	8017	200
SSTOPLCOP	55	130	40	2.17	5.1	1.6	tile	stainless steel	copper	-	200

Waste classification (2014/955/EU): 17 04 05.






I TILE STOP S

S PRE-SHAPED HOOKS FOR PLAIN TILES

- Prevents roof from slipping
- Dry installation
- Fast and safe interlocking
- Installation with foam or mortar is avoided in compliance with standard UNI 9460
- Wide range of materials and sizes available

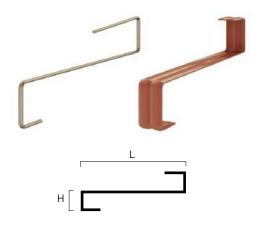

CODES AND DIMENSIONS

CODE	L	Н	L	Н	material	colour	RAL	
	[mm]	[mm]	[in]	[in]				
TSSI9016	90	16	3.5	0.6	steel AISI 204	steel	-	100
TSS19020	90	20	3.5	0.8	steel AISI 204	steel	-	100
TSSI12016	120	16	4.7	0.6	steel AISI 204	steel	-	50
TSSI12020	120	20	4.7	0.8	steel AISI 204	steel	-	50
TSSRED9016	90	16	3.5	0.6	pre-painted metal sheet	Siena red	3009	50
TSSRED9020	90	20	3.5	0.8	pre-painted metal sheet	Siena red	3009	50
TSSRED12016	120	16	4.7	0.6	pre-painted metal sheet	Siena red	3009	50
TSSRED12020	120	20	4.7	0.8	pre-painted metal sheet	Siena red	3009	50
TSSBRO9016	90	16	3.5	0.6	pre-painted metal sheet	brown	8019	50
TSSBRO9020	90	20	3.5	0.8	pre-painted metal sheet	brown	8019	50
TSSCOP9016	90	16	3.5	0.6	stainless steel tape	copper	-	50
TSSCOP9020	90	20	3.5	0.8	stainless steel tape	copper	-	50

Waste classification (2014/955/EU): 17 04 05.





I TILE STOP L

L PRE-SHAPED HOOKS FOR PLAIN TILES

- Dry installation
- Tough and secure hold for the first row of tiles on the pitch
- They can be used as mullion hooks on which the weight Sof the upper rows of tiles can be unloaded
- Installation with foam or mortar is avoided in compliance with standard UNI 9460
- Wide range of materials and sizes available





CODES AND DIMENSIONS

CODE	L	Н	L	Н	material	colour	RAL	
	[mm]	[mm]	[in]	[in]				
TSLI28016	280	16	11.0	0.6	steel AISI 204	steel	-	200
TSL128020	280	20	11.0	0.8	steel AISI 204	steel	-	200
TSLRED28016	280	16	11.0	0.6	pre-painted metal sheet	Siena red	3009	200
TSLRED28020	280	20	11.0	0.8	pre-painted metal sheet	Siena red	3009	200
TSLBRO28016	280	16	11.0	0.6	pre-painted metal sheet	brown	8019	200
TSLBRO28020	280	20	11.0	0.8	pre-painted metal sheet	brown	8019	200
TSLCOP28016	280	16	11.0	0.6	stainless steel tape	copper	-	200
TSLCOP28020	280	20	11.0	0.8	stainless steel tape	copper	-	200

Waste classification (2014/955/EU): 17 04 05.





I TILE STOP WIND

PRE-SHAPED BRACING HOOKS FOR TILES

- They prevent tiles from tipping over in the event of wind
- They ensure maximum stability of the roof covering
- Installation with foam or mortar is avoided in compliance with standard UNI 9460



CODES AND DIMENSIONS

CODE	version	material	colour	
TSWIND	per tile	zinc-plated steel	steel	50

Waste classification (2014/955/EU): 17 04 05.









I TILE STOP WIND COPPO

PRE-SHAPED BRACING HOOKS FOR RIDGE TILES

- They prevent bent tiles from tipping over in the event of wind
- They ensure maximum stability of the roof covering
- Installation with foam or mortar is avoided in compliance with standard UNI 9460




CODES AND DIMENSIONS

CODE	version	material	colour	
TSWINDC	for tiles without hole	steel AISI 204	steel	200

Waste classification (2014/955/EU): 17 04 05.



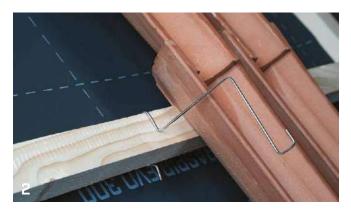





VENTILATION AND PROTECTION

VENT MESH

FLEXIBLE VENTILATION GRID

- Available in different heights and materials
- Available in different colour variations
- It prevents the entry of birds and insects allowing continuous ventilation



CODES AND DIMENSIONS

CODE	Н	L	Н	L	material	colour	RAL	
	[mm]	[m]	[in]	[ft]				
VENTREDBRO80	80	5	3.2	16	pre-painted metal sheet	brick red / brown	8004/8017	1
VENTREDBLA80	80	5	3.2	16	pre-painted metal sheet	brick red/black	8004/9005	1
VENTCOP80	80	25	3.2	82	aluminium	copper	-	1
VENTREDBRO100	100	5	3.9	16	pre-painted metal sheet	brick red / brown	8004/8017	1
VENTREDBLA100	100	5	3.9	16	pre-painted metal sheet	brick red/black	8004/9005	1
VENTCOP100	100	25	3.9	82	aluminium	copper	-	1
VENTREDBRO120	120	5	4.7	16	pre-painted metal sheet	brick red / brown	8004/8017	1
VENTREDBLA120	120	5	4.7	16	pre-painted metal sheet	brick red/black	8004/9005	1
VENTCOP120	120	25	4.7	82	aluminium	copper	-	1
VENTREDBRO160(1)	160	5	6.3	16	pre-painted metal sheet	brick red / brown	8004/8017	1
VENTREDBLA160(1)	160	5	6.3	16	pre-painted metal sheet	brick red/black	8004/9005	1
VENTCOP160 ⁽¹⁾	160	25	6.3	82	aluminium	copper	-	1

⁽¹⁾ Products available only upon order.

Waste classification (2014/955/EU): 17 04 02 (aluminium), 17 04 05 (metal sheet).

VENT GRILLE

PVC VENTILATION GRID

- Made of extremely weatherproof, impact and UV resistant material
- It protects the air entry section from animals and insects that might obstruct it



CODES AND DIMENSIONS


CODE	Н	L	Н	L	material	colour	RAL	
	[mm]	[m]	[in]	[ft]				
VENTG80R	80	5	3.2	16	PVC	brick red	8004	24
VENTG80B	80	5	3.2	16	PVC	black	9005	24
VENTG100R	100	5	3.9	16	PVC	brick red	8004	24
VENTG100B	100	5	3.9	16	PVC	black	9005	24

Waste classification (2014/955/EU): 17 02 03.

VENT FOLD

PRE-BENT GRID FOR VENTILATION

- Large air entry
- Easy installation thanks to the support foot
- Extremely weather resistant

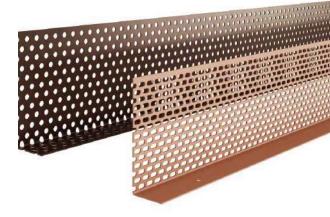

CODES AND DIMENSIONS


CODE	Н	В	L	Н	В	L	material	colour	RAL	
	[mm]	[mm]	[m]	[in]	[in]	[ft]				
VENTFSRED7030	70	30	1,5	2.8	1.2	5	pre-painted metal sheet	brick red	8004	10
VENTFSBRO7030	70	30	1,5	2.8	1.2	5	pre-painted metal sheet	brown	8017	10
VENTFSRED9030	90	30	1,5	3.5	1.2	5	pre-painted metal sheet	brick red	8004	10
VENTFSBRO9030	90	30	1,5	3.5	1.2	5	pre-painted metal sheet	brown	8017	10
VENTFPRED7030	70	30	2,5	2.8	1.2	8	PP	brick red	8004	20
VENTFPBRO7030	70	30	2,5	2.8	1.2	8	PP	brown	8017	20
VENTFPRED9030	90	30	2,5	3.54	1.2	8	PP	brick red	8004	20
VENTFPBRO9030	90	30	2,5	3.54	1.2	8	PP	brown	8017	20


Waste classification (2014/955/EU): 17 02 03 (PP), 17 04 05 (metal sheet).


BIRD SPIKE

RIGID BIRD SPIKES

• Element made up of a steel or polycarbonate base with stainless steel spikes fixed to the base to prevent birds from stopping on place







CODES AND DIMENSIONS

	CODE	В	Н	L	В	Н	L	version	
		[mm]	[mm]	[mm]	[in]	[in]	[in]		
1	BIRDSPIKE	60	110	1000	2.4	4.33	3280	single	25
2	BIRDSPIKEP1	60	110	335	2.4	4.33	13.19	single	150
3	BIRDSPIKEP2	90	110	335	3.54	4.33	13.19	double	150

Waste classification (2014/955/EU): 17 09 04 (polycarbonate+ steel), 17 04 05 (steel).

VENTILATION AND PROTECTION

BIRD COMB

STANDARD EAVES BIRD COMBS

ADJUSTABLE

The flexible polymer compound screens adapt to the profile of the final roof covering.

WIDE RANGE

It can be supplied in different colours and heights to meet different application needs. Also available in a version with a raised base to avoid the first eaves batten.





CODES AND DIMENSIONS

	CODE	Н	L	Н	L	version	material	colour	RAL	
		[mm]	[m]	[in]	[ft]					
	BIRDRED60	60	1	2.4	3	without ventilation batten	PP	brick red	8004	200
	BIRDBRO60	60	1	2.4	3	without ventilation batten	PP	brown	8019	200
1	BIRDBLA60	60	1	2.4	3	without ventilation batten	PP	black	9005	200
'	BIRDRED100	100	1	3.9	3	without ventilation batten	PP	brick red	8004	300
	BIRDBRO100	100	1	3.9	3	without ventilation batten	PP	brown	8019	300
	BIRDBLA100	100	1	3.9	3	without ventilation batten	PP	black	9005	300
	BIRDRED6025	85	1	3.4	3	with 25 mm ventilation batten	PP	brick red	8004	50
2	BIRDBRO6025	85	1	3.4	3	with 25 mm ventilation batten	PP	brown	8019	50
	BIRDBLA6025	85	1	3.4	3	with 25 mm ventilation batten	PP	black	9005	50

Waste classification (2014/955/EU): 17 02 03.



VERSATILE

It can be used in combination with all types of tiles and ridge tiles, thanks to its ability to adapt to the different shapes of the roof elements.

MATERIAL

Made of high quality polypropylene, weatherproof, impact and UV resistant.

■ BIRD COMB EVO


TWIN ROW EAVES BIRD COMB


MAXIMUM EFFICIENCY

Advanced eaves bird comb with twin row of perforated teeth to guarantee the maximum passage of air and secure protection against the entrance of birds.

VERSATILE

Also available in the version with raised base to increase the support thickness of the last row of tiles, aligning it with the slope of the roof.

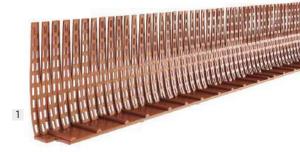

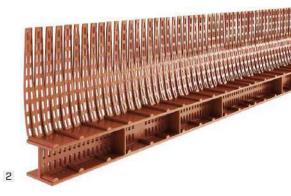

CODES AND DIMENSIONS

	CODE	Н	L	Н	L	version	material	colour	RAL	
		[mm]	[m]	[in]	[ft]					
	BIRDERED70	70	1	2.8	3	without ventilation batten	PP	brick red	2001	100
1	BIRDEBRO70	70	1	2.8	3	without ventilation batten	PP	brown	8019	100
ı	BIRDERED110	110	1	4.3	3	without ventilation batten	PP	brick red	2001	60
	BIRDEBRO110	110	1	4.3	3	without ventilation batten	PP	brown	8019	60
	BIRDERED7025	90	1	3.5	3	with 25 mm ventilation batten	PP	brick red	2001	35
2	BIRDERED11025	130	1	5.1	3	with 25 mm ventilation batten	PP	brick red	2001	25

Waste classification (2014/955/EU): 17 02 03.



STABLE OVER TIME

The polymeric compound ensures good stability over time, guaranteeing the protective function of the ventilation.

MATERIAL

Made of high quality polypropylene, weatherproof, impact and UV resistant.

VENTILATION AND PROTECTION

VENT SHAPE


VENTILATION GRID FOR ROOFS MADE OF TILES OF **VARIOUS SHAPE**


DURABILITY

Made of metal sheet, it is resistant and perfectly weatherproof.

FAST INSTALLATION

Pre-bending and shaping during production makes installation immediate, without the need for additional supports.



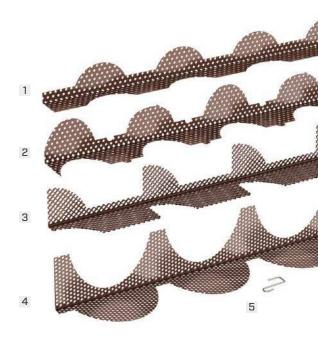

CODES AND DIMENSIONS

CODE	Н	h	Р	L	Н	h	P	L	version	material	colour	RAL	
	[mm]	[mm]	[mm]	[mm]	[in]	[in]	[in]	[in]					
1 VENTSBRO9015	90	15	195	975	3.5	0.6	7.7	38.4	for ridge tile	perforated metal sheet	brown	8017	10
2 VENTSBRO7519	75	19	200	1000	3.0	0.8	7.9	39.4	for Portuguese roof tiles	expanded metal sheet	brown	8017	10
3 VENTSBRO4520	45	20	300	900	1.8	0.8	11.8	35.4	for concrete French roof tiles	perforated metal sheet	brown	8017	10
4 VENTSBRO7020	70	20	300	900	2.8	0.8	11.8	35.4	for concrete Greek roof tile	perforated metal sheet	brown	8017	10

Other versions and dimensions are available on request.

Waste classification (2014/955/EU): 17 04 05.

CODE	L	Н	L	Н	version	material	colour	
	[mm]	[mm]	[in]	[in]				
5 VENTSHOOK	50	20	2.0	0.8	for ridge tile	stainless steel strap	steel	100



UV STABILITY

The choice of metal material ensures excellent UV stability even in harsh climate zones.

SAFETY

They allow under-tile micro-ventilation, protecting the roof from the entry of leaves and animals.

RECOMMENDATIONS FOR INSTALLATION









RAIN TUBE

TEMPORARY DOWNPIPE FOR CONSTRUCTION SITE **PHASES**

- It protects building façades during construction or renovation work
- Versatile, easy-to-use solution







CODES AND DIMENSIONS

CODE	d	L	d	L	material	colour	
	[mm]	[m]	[in]	[ft]			
RTUBE200	200	200	7.9	656	PVC	transparent	1

Waste classification (2014/955/EU): 17 02 03.

I CHOICE OF PRODUCTS

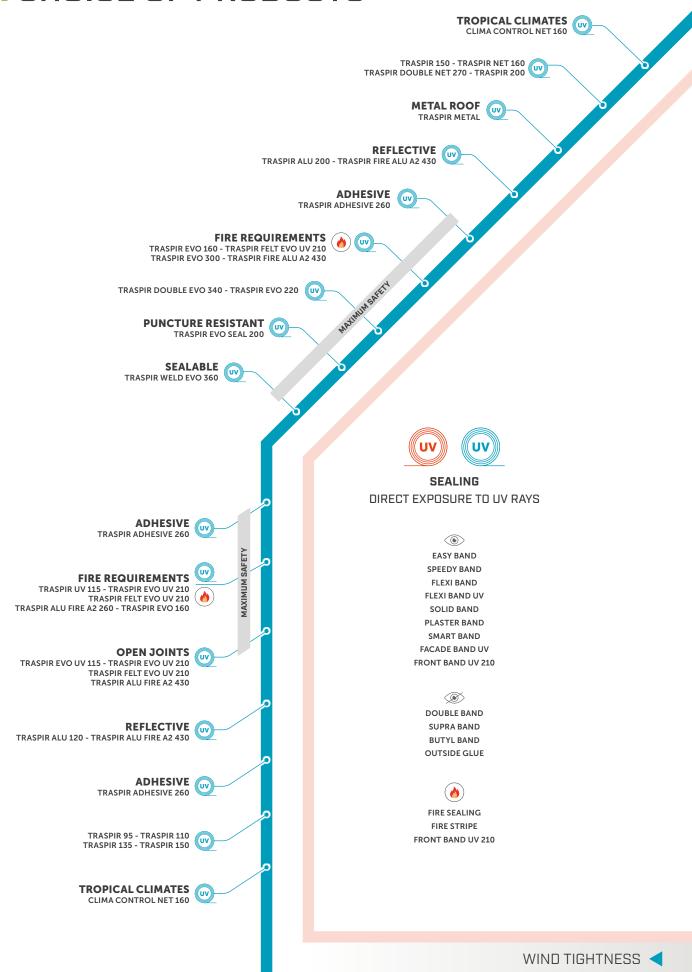

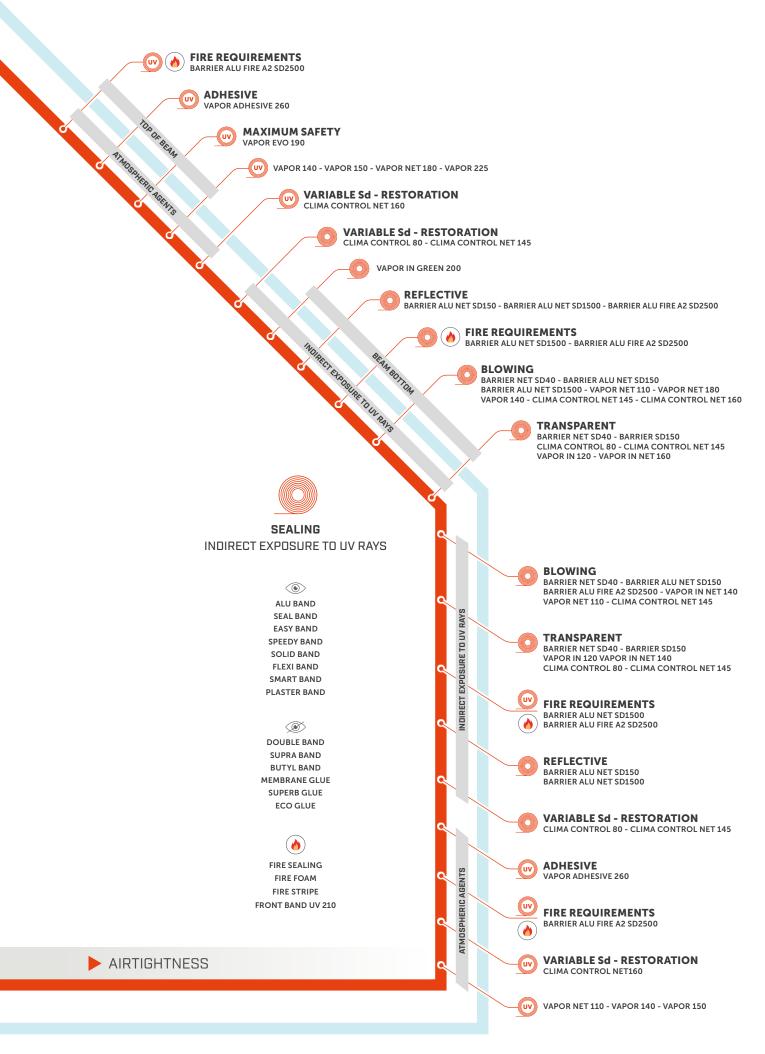

BREATHABLE AND VAPOUR CONTROL **SCREENS**


RESISTANCE TO PENETRATION OF WATER VAPOUR

The main parameter that defines the type of membrane is its resistance to penetration of water vapour value, identified with Sd (m).

Sd (m): equivalent air layer, as it is a measure of the thickness of air that would offer the same resistance as the product or structure in question to the passage of vapour (by diffusion).

Another parameter describing the water vapour diffusion capacity of products is the water vapour permeability and can be expressed in US perm, $\mu g/Ns$ and g/m²24h.

The membranes classification is not defined by a single standard but is determined by different national standards in different ways depending on their Sd value. For this reason, finding a single definition valid for all countries is not possible.

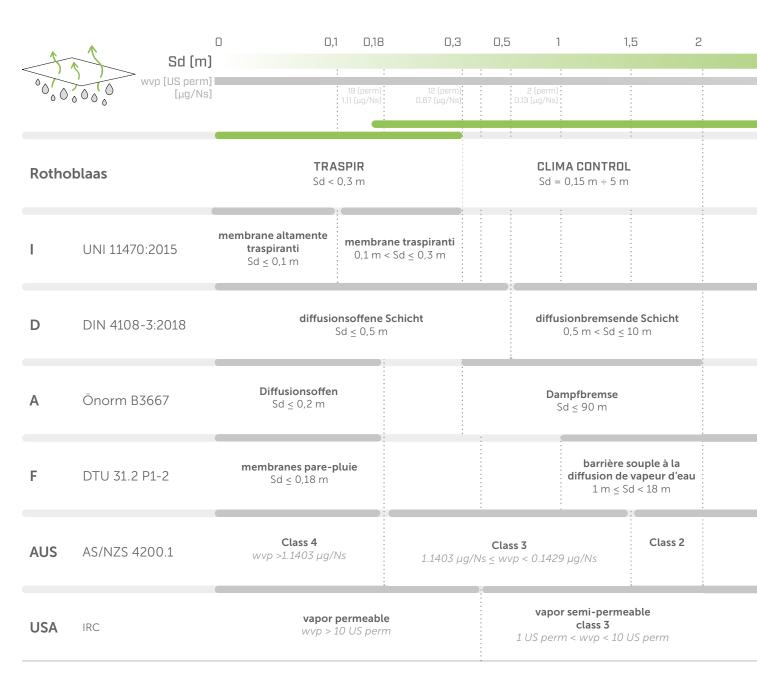


BREATHABLE AND VAPOUR CONTROL MEMBRANES CLASSIFICATION

Membranes can be grouped into 3 categories, based on their characteristics:

	AIRTIGHTNESS	WATERTIGHTNESS	RESISTANCE TO WATER VAPOUR
Vapour barriers	•••	• • •	• • •
Vapour control membranes	•••	•••	•••
Breathable membranes	• • •	•••	000

The properties described here, together with other parameters mentioned in the technical data sheets, are regulated by the CE marking protocol for vapour control membranes (EN 13984), underlays for discontinuous roofing (EN 13859-1) and wall underlays (EN 13859-2).

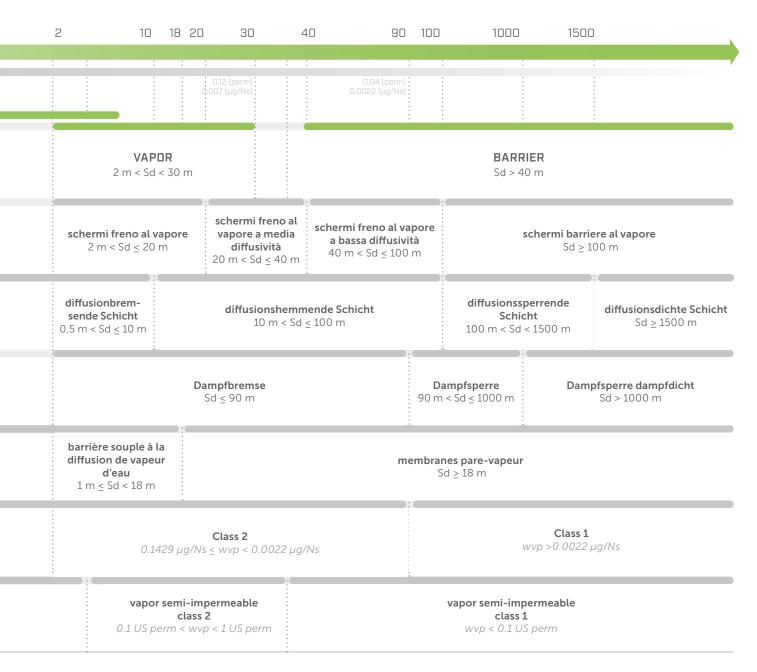

MEMBRANEPERFORMANCE

The membranes undergo various tests to determine their performance. Based on these, it is possible to choose the most suitable solution for your project.

WATERTIGHTNESS



Ability of the product to temporarily prevent the passage of water during construction and in case of accidental breakage and dislocation of the roof covering.


Passing this test is not sufficient to make the products suitable to replace the sealing layer and to withstand standing water for long periods.

This property indicates resistance to penetration of water. Standard **EN 13859-1/2** establishes the following classification:

- W1: High resistance to penetration of water
- W2: Medium resistance to penetration of water
- W3: Low resistance to penetration of water

Standard EN 13859-1 and 2 establishes a requirement of resistance to 200 mm of static water pressure for 2 hours (classification W1). NOTE: for vapour control membranes and control layers, the word "conforming" is only used when the product meets the most severe requirements of the test indicated above (200 mm static water pressure for 2 hours).

UV STABILITY AND AGEING



Is the value relative to annual median radiation in the Central Europe zone, formulated based on EN 13859-1/2 (55 MJ/m²).


Thetestmethodconsists of exposing the specimens to continuous UV irradiationatelevated temperature for 336 hours. This corresponds to a total UV radiation exposure of 55 MJ/m².

For walls that do not exclude UV exposure with open joints, artificial ageing by UV must be extended over a period of 5000 hours.

Resistance to water penetration, tensile strength and elongation must be determined after artificial ageing.


Note: actual climatic conditions are variable and depend on the application context, so it is difficult to establish an exact match between artificial ageing tests and actual conditions.

TENSILE STRENGTH

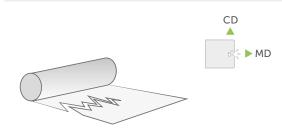

Force exercised both longitudinally and transversally, to determine the maximum load, expressed as N/50 mm.

ELONGATION

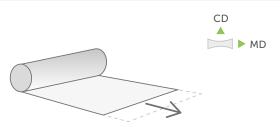


Indicates the maximum elongation percentage the product can suffer before failure.

RESISTANCE TO NAIL TEARING



Force exercised both longitudinally and transversally with the insertion of a nail, to determine the maximum load, expressed in N (Newton).


MASS PER UNIT AREA

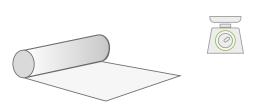

Mass per unit area expressed in g/m². High mass per unit area ensure great mechanical performance and superior abrasion resistance

MD / CD: longitudinal/transversal values with respect to the direction the membrane rolls


DURABILITY

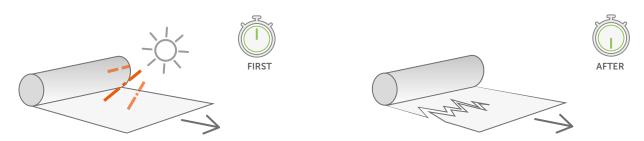

The polymers from which the synthetic membranes are made have been specially engineered to perform their function in the product and have excellent properties.

Certain stress causes, such as UV radiation, high temperatures and pollutants, affect these properties.

For example: the mechanical properties of a new membrane and a membrane exposed to ultraviolet (UV) radiation for 6 months are different. This is because UV attacks the chemical structure of certain polymers which, if not adequately protected by UV stabilisers, affect the properties of the finished product.

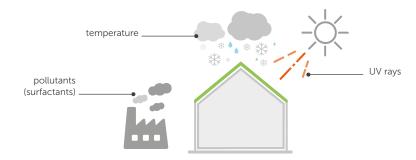

In order to maintain the properties of the product, it is important to choose it taking into account the conditions it will be exposed to throughout its life, from construction to operation, and to protect it as much as possible (the construction phase is a source of stress and accelerated ageing).

Durability is affected by the sum of these sources of stress: temperature, UV and pollutants.

CORRELATION BETWEEN EXPERIMENTAL AND ACTUAL RESULTS

The data obtained from the ageing tests are comparative and not absolute data. The relationship between test exposure and outdoor exposure depends on a number of variables, and no matter how sophisticated the accelerated ageing test may be, it is not possible to find a conversion factor: in accelerated ageing tests the test conditions are constant, whereas during real outdoor exposure they are variable. The most that can be expected from accelerated laboratory ageing data is a reliable indication of the relative strength ranking of a material compared to other materials.

In the reality of a construction site, a product tends to be subject to more than one cause of stress and the conditions are unpredictable. Each application context has specific conditions, with effects that are difficult to measure with a standard test.

Therefore, it is important to maintain large safety margins, for example by choosing products with better properties even where not specifically required.

Given highly variable weather and radiation conditions, the value may change based on the country and weather conditions at the time of application.











PRODUCT ORIENTATION

LATITUDE

ALTITUDE

YEARLY RANDOM **VARIATIONS IN TIME**

I MEMBRANES PROPERTIES

				ВА	RRII	ER					CI	IMA	CON	ITRO	DL &	VAP	DR			
			BARRIER NET SD40	BARRIER SD150	BARRIER ALU NET SD150	BARRIER ALU NET SD1500	BARRIER ALU FIRE A2 SD2500	VAPOR IN 120	VAPOR IN NET 140	VAPOR IN GREEN 200	CLIMA CONTROL 80	CLIMA CONTROL NET 145	CLIMA CONTROL NET 160	VAPOR NET 110	VAPOR 140	VAPOR 150	VAPOR NET 180	VAPOR EVO 190	VAPOR 225	VAPOR ADHESIVE 260
Monolithic/Evo											V	V	V					V		
Microporous/Stand	dard		✓	✓	✓	✓	✓	✓	✓	✓				✓	✓	✓	✓		✓	✓
Bituminous																				
Reinforcing grid			V		V	V			V	✓		V	V	V			V			
Variable Sd											V	V	√							
Reflective					✓	V	V													
Self-adhesive																				✓
Permanent UV stab (see product data s																				
	ass per unit area N 1849]	g/m ²	110	190	100	200	140	120	140	200	80	145	160	110	140	150	180	190	225	260
		oz/ft ²	0.36	0.62	0.33	0.66	0.46	0.39	0.46	0.66	0.26	0.48	0.52	0.36	0.46	0.49	0.59	0.62	0.74	0.85
tra	ater vapour ansmission (Sd) N 1931]	m	40	145	150	4000	2500	30	30	7	5	0,15	0,5 5	5	10	13	10	5	4	19
		US perm	0.087	0.024	0.023	0.001	0.001	0.140	0.140	0.500	23 0.7	23 0.7	7 0.7	0.70	0.350	0.269	0.350	0.70	0.874	0.184
	eaction to fire N 13501-1]	steel	F	E	Е	B-s1,d0	A2-s1,d0	E	Е	E	Е	Е	E	Е	F	Е	Е	E	Е	E
	aximum tensile force	N/50mm	220 190	206 180	230 230		1362 1349	220 180	390 360	250 170	120 90		400 270	200 250	230 180	250 200	320 300	480 500	380 300	250 200
- Heller	N 12311]	lb/in	25 22	24 21	26 26	53 57	156 154	25 21	45 41	29 19	14 10	50 46	46 31	23 29	26 21	29 23	37 34	55 57	43 34	29 23
	ongation MD/CD N 12311]	%	15 15	480 540	15 10	26 19	2,8	47 68	18 16	5 5	50 50	15 15	20 20	25 25	35 40	35 40	10 10	65 65	60 80	35 40
te te	esistance to nail aring MD/CD	N	155 145	147 165	110 110	400 400		160 205	280 260	100 130	40 40		240 250	170 170	125 145		250 290	265 320	225 300	
[E	N 12310]	lbf	34.8 32.6		24.7 24.7	89.9 89.9			62.9 58.5		9	67.4 56.2			28.1 32.6				50.6 67.4	
in	ternal		V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V
e)	kternal						V						V	V	V	V	V	V	V	V
ro	oof		V	✓	V	✓	V	V	V	V	V	V	V	✓	V	V	V	V	✓	V
W	all		V	V	√	V	V	V	V	√	√	V	√	√	√	V	√	V	√	V

										TR	RASF	PIR												В	YTU	М		
TRASPIR 95		TRASPIR 110	TRASPIR EVO UV 115	TRASPIR ALU 120	TRASPIR 135	TRASPIR 150	TRASPIR NET 160	TRASPIR EVO 160	TRASPIR 200	TRASPIR ALU 200	TRASPIR EVO SEAL 200	TRASPIR FELT UV 210	TRASPIR EVO UV 210	TRASPIR EVO 220	TRASPIR ADHESIVE 260	TRASPIR DOUBLE NET 270	TRASPIR EVO 300	TRASPIR DOUBLE EVO 340	TRASPIR WELD EVO 360	TRASPIR ALU FIRE A2 430	TRASPIR METAL	BYTUM 400	BYTUM 750	BYTUM 1100	BYTUM 1500	BYTUM 2000	BYTUM BASE 2500	BYTHM SI ATE 2500
		./	✓		./	./	./	V	./	./	V	√	✓	V	./	./	V	√	✓	-1	./							_
-		√		✓	✓	√	√		✓	√					✓	✓				√	√	√	V	V	_	V	V	_
							_			V						V			_									=
				V						✓										✓								
															✓												√	•
			V									V	V				V			√								1
95	5 1	.12	115	120	135	150	160	160	200	200	200	210	210	220	260	270	300	340	360	430	610	400	750	1100	1500	2000	2550	35
0.3	31 0	.37	0.38	0.39	0.44	0.49	0.52	0.52	0.66	0.66	0.66	0.69	0.69	0.72	0.85	0.88	0.98	1.11	1.18	1.41	1.67	1.31	2.46	3.60	4.92	6.55	8.36	11
0,0	2 0	,03	0,08	0,1	0,02	0,02	0,02	0,1	0,02	0,045	0,08	0,1	0,04	0,2	0,22	0,035	0,04	0,19	0,2	0,08	0,02	22	38	55	120	120	200	2
17:	5 1	117	44	35	175	175	<i>17</i> 5	35	175	78	44	35	87	17	16	100	87	18	17	44	<i>17</i> 5	0	0.092	0.064	0.029	0.029	0.017	0.
																												_
E		E	B-s1,d0	E	Е	E	E	B-s1,d2	Е	E	E	B-s1,d2	B-s1,d0	E		Е	B-s1,d0	Е	Е	A2-s1,d0	E	Е	Е	E	Е	E	E	
						350 210														3000 3200						600 400		
24		29 19	17 13	27 23	32 22	40 24	48 48	32 25	41 31	40 26	34 25	43 48	34 23	44 36	36 29	74 91	43 29	69 52		343 365		57 46	57 46	74 57	69 46	69 46	46 34	4
179		1.9	13			24	40		31		23	40	23		23	91	23	JZ	30	303	20	40	40	<i>J</i> /	40	40		_
50		50 70	90	94 126	70 110	100 125	25 20	50 60	45 85	30 70	50 70	40 55	25 25	65 80	61 66	40 60	25 25	65 80	50 65	6 5	45 70	45 50	45 50	45 50	40 40	40 40	35 35	
90																				580 450						220 230		1
					30.3 38.2															130.4 101.2						49.5 51.7		4
		√	✓	✓	√	V	V	V	V	√	√	V	✓	V	✓	V	✓	√	√	V	V	V	✓	V	V	V	V	Ī
V		V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	V	
		√ ✓	V		✓	✓	✓	✓	✓	✓	✓	✓	_	✓	✓ ✓	✓	V	✓	✓	✓	✓ ✓	✓	✓	V	✓	✓	✓	•

CERTIFICATIONS AND COMPLIANCE

CERTIFICATIONS



PASSIVE HOUSE

The Passive House Institute, an independent research organisation that has set an internationally recognised standard for energy efficiency in construction, submits tapes and membranes to extremely rigorous tests to prove their effectiveness in terms of performance. Tests are carried out under boundary conditions that reflect reality as closely as possible in order to ensure that the product retains its functionality once installed. In the case of membranes, in particular, overlaps with other adjacent materials are observed.

CLIMA CONTROL 80, FLEXI BAND, SPEEDY BAND, SEAL BAND



SINTEF

The Norwegian SINTEF certification is awarded to waterproofing solutions that successfully pass certain installation and ageing tests: effectiveness, durability and sustainability of the materials are just some of the areas of investigation explored by this independent certification body.

TRASPIR 110. FLEXI BAND



CSTB

The French CSTB (Centre Scientifique et Technique du Bâtiment) issues certificates of conformity known as "Avis Technique", which declare that the requirements imposed by French market regulations for building materials are met. With regard to "Écrans de Sous-Toiture", i.e. waterproofing underlays for roofs, the parameters considered are resistance to the passage of water (E), permeability to water vapour (S) and mechanical resistance of the membrane (T).

TRASPIR 110, TRASPIR 150, TRASPIR NET 160



BBA

BBA (British Board of Agrément) is the independent body that certifies that products and systems conform to British standards after subjecting candidate products to rigorous testing. Specifically, our membranes have been evaluated taking into account various parameters: weather tightness, risk of condensation, resistance to wind loads, strength of the membrane itself and its durability.

TRASPIR 95, TRASPIR 135, TRASPIR 150

NATIONAL TECHNICAL STANDARDS

UNI 11470 "Coperture discontinue - Schermi e membrane traspiranti sintetiche Definizione, campo di applicazione e posa in opera" Classificazione in funzione della massa areica: classe A, B, C, D

Classificazione in funzione della resistenza meccanica: classe R1, R2, R3

UNI 11564 "Coperture discontinue - Teli impermeabilizzanti sottotegola bituminosi Definizione, campo di applicazione e posa in opera"

Tipologia di armatura: simbolo C, V, P, R Resistenza a trazione: classe SR0, SR1, SR2, SR3 oppure MR0, MR1, MR2

Flessibilità a freddo: classe A, B, C, D

Önorm B 3667 "Abdichtungsbahnen - Kunststoff-Dampfsperrbahnen - Nationale Umsetzung der ÖNORM EN 13984" DB:Dampfbremse, DS: Dampfsperre, DS dd: Dampfsperre dampfdicht

Önorm B 3661 "Abdichtungsbahnen - Unterdeck- und Unterspannbahnen für Dach-

deckungen - Nationale Umsetzung der ÖNORM EN 13859-1 Unterdeckbahnen: UD Typ I, UD Typ II,

Unterspannbahnen: US

Elastomerbitumenbahnen als Unterdeck- und Unterspannbahnen: E-do nsk

F

DTU 31.2 "Construction de Maisons et Batiments a Ossature en Bois" pare-vapeur, Barriere souple a la diffusion de vapeaur d'eau (Bs dve), pare pluie Écrans souples sous-toiture: caractérise la résistance au passage de l'eau (E1, E2), caractérise la perméance à la vapeur d'eau (Sd1, Sd2, Sd3), caractérise la résistance mécanique (TR1, TR2, TR3)

Ecrans souples pare-pluie: Entraxe du support (Esc, E450, E600), Jeu entre panneaux de revetement exterieur (J0, Jf), Durée d'exposition en phase chantier (C1, C2, C3)

ZVDH "Deutsches Dachdeckerhandwerk Regelwerk"

Dd: Diffusionsdichte Schicht, Ds:Diffusionssperrende Schicht, Dh: Disffusionshemmende Schicht, Db: diffusionsbremsende Schicht, Fv: Feuchtevariabel

Unterspannbahnen USB: Klasse A, B

Unterdeckbahnen UDB: Klasse A. B. C

AUS

AS/NZS 4200.1 "Pliable building membranes and underlays" Classification of vapor permeance Vapour Barrier: Class 1 and Class 2

CH

SIA 232 "Geneigte Dächer / Toitures inclinées":

• UD EB = UD für erhöhte Beanspruchung

Vapour Permeable: Class 3 and Class 4

UD AB = UD für ausserordentliche Beanspruchung
 V.v.o. = Verlegung von oben, Holraum /Fugen auf glatt und rau Untergrund
 V.v.u. = Verlegung von unten, über Kopf

USA

IRC Water Vapor Retarder Classification

class 1: vapor impermeable

class 2: vapor semi-impermeable class 3: vapor semi-permeable

vp: vapor permeable

		Α	СН	В	F	1	AUS	USA
		Önorm B 4119 Önorm B 3667	SIA 232	ZVDH	DTU 31.2	UNI 11470	AS/NZS 4200.1	IRC
	BARRIER NET SD40	DB	V.v.u.	Dh	pare-vapeur	D/R2	Class 2	Class 1
œ	BARRIER SD150	DS	V.v.u.	Ds	pare-vapeur	B/R2	Class 1	Class 1
RE	BARRIER ALU NET SD150	DS	V.v.u.	Ds	pare-vapeur	D/R1	Class 1	Class 1
BARRIER	BARRIER ALU NET SD1500	DS dd	V.v.u.	Dd	pare-vapeur	A/R3	Class 1	Class 1
	BARRIER ALU FIRE A2 SD2500	DS dd	V.v.u. V.v.o. H > 90mm	Dd	pare-vapeur E1 Sd3 TR3	B/R3	Class 1	Class 1
	VAPOR IN 120	DB	V.v.u.	Dh	pare-vapeur	D/R1	Class 2	Class 2
	VAPOR IN NET 140	DB	V.v.u.	Dh	pare-vapeur	C/R2	Class 2	Class 2
	VAPOR IN GREEN 200	DB	V.v.u.	Db	Bs dve	A/R1	Class 2	Class 2
_	CLIMA CONTROL 80	-	V.v.u.	Fv DIN 4108-3 DIN 68800-2 Fv DIN 4108-3	Bs dve	D/R1	Class 2 Class 3 Class 2	Class 2 vp Class 2
CLIMA CONTROL	CLIMA CONTROL NET 145	-	V.v.u. V.v.u.	DIN 68800-2 Fv DIN 4108-3	Bs dve Bs dve	B/R3	Class 3 Class 2	vp Class 2
00	CLIMA CONTROL NET 160	-	V.v.o. H > 90mm V.v.u.	DIN 68800-2	E1 Sd2 TR2 Bs dve	B/R3	Class 3	Class 3
Ψ	VAPOR NET 110	DB	V.v.u. V.v.o. H > 90mm V.v.u.	Db	E1 Sd2 TR1 Bs dve	D/R1	Class 2	Class 2
СĎ	VAPOR 140	DB	V.v.o. H > 90mm V.v.u.	Db	E1 Sd2 TR1 Bs dve	C/R1	Class 2	Class 2
VAPOR	VAPOR 150	DB	V.v.u. V.v.o. H > 90mm V.v.u.	Dh	E1 Sd2 TR1 Bs dve	B/R1	Class 2	Class 2
۸	VAPOR NET 180	DB	V.v.u. V.v.o. H > 90mm V.v.u.	Db	E1 Sd2 TR3 Bs dve	B/R3	Class 2	Class 2
	VAPOR EVO 190	DB	V.v.a. V.v.o. H > 90mm V.v.u.	Db	E1 Sd2 TR3 Bs dve	B/R3	Class 2	Class 2
	VAPOR 225	DB	V.v.a. V.v.o. H > 90mm V.v.u.	Db	E1 Sd2 TR3 pare-vapeur	A/R3	Class 2	Class 2
	VAPOR ADHESIVE 260	DB	V.v.o. H > 90mm	Dh	E1 Sd3 TR1	A/R1	Class 2	Class 2
	TRASPIR 95	-	-	-		-	Class 4	vp
	TRASPIR 110	-	UD (fU)	USB-A UDB-B	E1 Sd1 TR1 E450 Jf C2	D/R1	Class 4	vp
	TRASPIR EVO UV 115	-	-	-	E450 J0 C3	-	Class 4	vp
	TRASPIR ALU 120	-	-	-	E450 Jf C1	-	Class 4	vp
	TRASPIR 135	-	UD (fU)	USB-A UDB-B	E1 Sd1 TR1 E450 Jf C1	C/R1	Class 4	vp
	TRASPIR 150	UD Typ I	UD (wU)	USB-A UDB-A	E1 Sd1 TR2 E600 Jf C1	B/R2	Class 4	vp
	TRASPIR NET 160	UD Typ I US	UD (g)	USB-A UDB-A	E1 Sd1 TR3	B/R3	Class 4	vp
	TRASPIR EVO 160	UD Typ I	UD (wU)	USB-A UDB-A USB-A	E1 Sd1 TR1 E600 Jf C2	B/R2	Class 4	vp
	TRASPIR 200	UD Typ I US	UD (g)	UDB-A	E1 Sd1 TR2	A/R2	Class 4	vp
프	TRASPIR ALU 200	UD Typ I US	UD (g)	USB-A UDB-A USB-A	E1 Sd1 TR2 E1 Sd1 TR2	A/R2	Class 4	vp
TRASPIR	TRASPIR EVO SEAL 200	UD Typ I	UD (g)	UDB-A	E600 Jf C2	A/R3	Class 4	vp
TR/	TRASPIR FELT UV 210	UD Typ I	UD (g)	USB-A UDB-A	E1 Sd1 TR2 E600 J0 C3	A/R2	Class 4	vp
	TRASPIR EVO UV 210	-	-	-	E600 J0 C3	-	Class 4	vp
	TRASPIR EVO 220	UD Typ II US	UD (g)	USB-A UDB-A	E1 Sd1 TR2 E600 Jf C2	A/R3	Class 3	vp
	TRASPIR ADHESIVE 260	UD Typ I US	UD (g)	USB-A UDB-A	E1 Sd1 TR2 E600 Jf C1	A/R3	Class 3	vp
	TRASPIR DOUBLE NET 270	UD Typ I US	UD (g)	USB-A UDB-A	E1 Sd1 TR3	A/R3	Class 4	vp
	TRASPIR EVO 300	UD Typ I US	UD (g)	USB-A UDB-A	E1 Sd1 TR1 E600 J0 C3	A/R2	Class 4	vp
	TRASPIR DOUBLE EVO 340	UD Typ II US	UD (g)	USB-A UDB-A	E1 Sd1 TR3 E600 Jf C2	A/R3	Class 3	vp
	TRASPIR WELD EVO 360	UD Typ II US	UD (g)	USB-A UDB-A	E1 Sd1 TR3	A/R3	Class 3	vp
	TRASPIR ALU FIRE A2 430	UD Typ I US	UD (g)	USB-A UDB-A	E1 Sd1 TR3 E600 J0 C3	A/R3	Class 4	vp
	TRASPIR METAL	UD Typ I	UD (g)	USB-A UDB-A	E1 Sd1 TR2 E600 Jf C1	A/R2	Class 4	vp
	BYTUM 400	E-d0 nsk	V.v.o. H > 90mm	USB-A	E1 Sd3 TR2	P SR2 A	Class 2	Class 2
	BYTUM 750	E-d0 nsk	UD (g) V.v.o. H > 90mm	UDB-A	E1 Sd3 TR2	P SR2 A	Class 2	Class 1
	BYTUM 1100	E-d0 nsk	UD (g) V.v.o. H > 90mm	UDB-A	E1 Sd3 TR2	P SR3 A	Class 2	Class 1
BYTUM	BYTUM 1500	E-d0 nsk	UD (g) V.v.o. H > 90mm UD (g)	UDB-A USB-A	E1 Sd3 TR2	P SR3 A	Class 1	Class 1
ВУ	BYTUM 2000	E-d0 nsk	V.v.o. H > 90mm UD (g)	UDB-A USB-A UDB-A	E1 Sd3 TR2	P SR3 A	Class 1	Class 1
	BYTUM BASE 2500	E-d0 nsk	V.v.o. UD (fU)	USB-B UDB-C	E1 Sd3 TR1	P SR1 A	Class 1	Class 1
	BYTUM SLATE 3500	E-d0 nsk	V.v.o.	USB-B	E1 Sd3 TR1	P SR1 A	Class 1	Class 1
	BY IUM SLATE 3500	E-d0 nsk	UD (fU)	UDB-C	E1 Sd3 TR1	P SR1 A	Class 1	Class 1

STOPS AND BARRIERS

I BARRIERS AND STOPS

BARRIER NET SD40 VAPOUR BARRIER SD 40 m	06
BARRIER SD150 <i>VAPOUR BARRIER SD > 145 m</i>	30
BARRIER NET ADHESIVE 200 SELF-ADHESIVE VAPOUR BARRIER SCREEN WITH REINFORCEMENT GRID	10
BARRIER ALU NET SD150 REFLECTIVE VAPOUR BARRIER SD 150 m	13
BARRIER ALU NET SD1500 REFLECTIVE VAPOUR BARRIER SD > 1500 m	14
BARRIER ALU FIRE A2 SD2500 REFLECTIVE AIR VAPOUR BARRIER FIRE REACTION CLASS A2-s1,d0	16
VAPOR IN 120 VAPOUR CONTROL MEMBRANE	18
VAPOR IN NET 140 VAPOUR CONTROL MEMBRANE WITH REINFORCEMENT GRID	19
VAPOR IN GREEN 200 VAPOUR CONTROL MEMBRANE BASED ON NATURAL CELLULOSE	21
CLIMA CONTROL 80 MEMBRANE WITH VARIABLE VAPOUR DIFFUSION	28
CLIMA CONTROL NET 145 MEMBRANE WITH VARIABLE VAPOUR DIFFUSION AND REINFORCEMENT GRID	30
CLIMA CONTROL NET 160 MEMBRANE WITH VARIABLE VAPOUR DIFFUSION AND REINFORCEMENT GRID	
VAPOR NET 110 VAPOUR CONTROL MEMBRANE WITH REINFORCEMENT GRID	34
VAPOR 140 VAPOUR CONTROL MEMBRANE	35
VAPOR 150 VAPOUR CONTROL MEMBRANE	36
VAPOR NET 180 VAPOUR CONTROL MEMBRANE WITH REINFORCEMENT GRID	37
VAPOR EVO 190 HIGH PERFORMANCE VAPOUR CONTROL MEMBRANE	38
VAPOR 225 VAPOUR CONTROL MEMBRANE	40
VAPOR ADHESIVE 260 SELF-ADHESIVE VAPOUR CONTROL MEMBRANE	42

BARRIER NET SD40

VAPOUR BARRIER Sd 40 m

110 g/m²



















TRANSPARENT

It ensures simple, fast and safe installation.

REINFORCING GRID

Thanks to its composition, it is not affected by mechanical stress or by staples and nails.

BLOWING

The reinforcement grid offers great resistance to the membrane, even in the event of pressure caused by the insulating material being blown.

COMPOSITION


top layer PE functional film

middle layer PE reinforcing grid

bottom layer PE functional film

CODES AND DIMENSIONS

CODE		description	mass per unit area	tape	Н	L	Α	Н	L	Α	
			[g/m²]		[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
BAR40)	BARRIER NET SD40	110	-	1,5	50	75	5	164	807	80

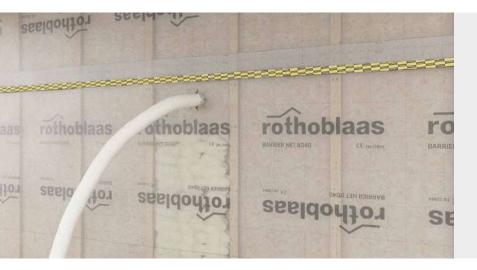

SAFE INSTALLATION

During installation of the insulation layer by means of blowing, mechanical stresses are created which the reinforcement grid can compensate for.

POLYETHYLENE

Specific material with the function of strongly limiting the passage of vapour from the hot part to the cold part of structures, limiting the condensation problems.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	110 g/m ²	0.36 oz/ft ²
Thickness	EN 1849-2	0,22 mm	9 mil
Water vapour transmission (Sd)	EN 1931	40 m	0.087 US perm
Maximum tensile force MD/CD	EN 12311-2	> 220 / 190 N/50mm	> 25 / 22 lb/in
Elongation MD/CD	EN 12311-2	15 / 15 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 155 / 145 N	> 35 / 33 lbf
Watertightness	EN 1928	conforming	-
Indirect exposure to UV rays	-	2 weeks	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class F	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,4 W/(m·K)	0.23 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 500 kg/m ³	approx. 0.29 oz/in ³
Water vapour resistance factor (μ)	-	approx. 182000	approx. 200 MNs/g
VOC content	-	0 %	-

■ RELATED PRODUCTS



SEAL BAND page 64



SPEEDY BAND page 70



page 331



MECHANICAL STRENGTH

The reinforcement grid provides high mechanical resistance to the product, preventing major breakage in case of puncture.

BARRIER SD150

VAPOUR BARRIER Sd > 145 m

190 g/m²





















EXTRALARGE

Also available in a 3,2 m version. Also ideal for waterproofing floors.

EASY INSTALLATION

Thanks to its transparency, the membrane is immediately installed on the substructure.

PRE-BENT

The 3.2 m version is rolled up pre-bent during production to optimise storage and save space.



single layer PE functional film

CODES AND DIMENSIONS

CODE	description	mass per unit area	tape	roll	Н	L	Α	Н	L	Α	
		[g/m ²]		[m]	[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
BAR150	BARRIER SD150	190	-	1,5 x 25	1,5	25	37,5	5	82	404	52
BAR15032	BARRIER SD150 3,2 m	190	-	1 x 25	3,2	25	80	11	82	861	52

TRANSPARENT

The transparency of the product makes it easy to identify the strut when it is installed directly on the framed structure.

VERSATILITY


The extruded polyethyl product offers several possible applications, from temporary protection on the construction site to vapour control within the layers.

■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	190 g/m ²	0.62 oz/ft ²
Thickness	EN 1849-2	0,2 mm	8 mil
Water vapour transmission (Sd) ⁽¹⁾	EN 1931	> 145 m	0.024 US perm
Maximum tensile force MD/CD	EN 12311-2	> 206 / 180 N/50mm	> 24 / 21 lb/in
Elongation MD/CD ⁽¹⁾	EN 12311-2	480 / 540 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 147 / 165 N	> 33 / 37 lbf
Watertightness	EN 1928	conforming	-
Indirect exposure to UV rays	-	2 weeks	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.03 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.002 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	conforming	-
Thermal conductivity (λ)	-	0,4 W/(m·K)	0.23 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 940 kg/m ³	approx. 0.54 oz/in ³
Water vapour resistance factor (μ)	-	approx. 725000	approx. 725 MNs/g
VOC content	-	0 %	-

⁽¹⁾ Average values obtained from laboratory tests. Consult the Declaration of Performance for the minimum values.

■ RELATED PRODUCTS

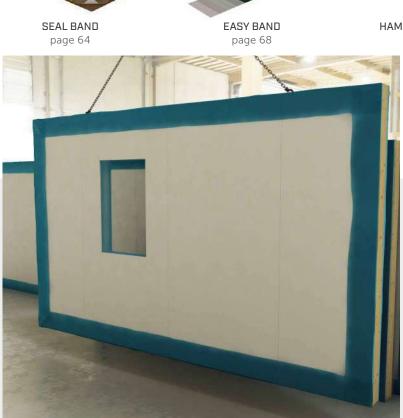



HAMMER STAPLER 22 page 330

PREFABRICATION

Thanks to the 3,2 m width, it is possible to join the barrier between the different walls without additional sealing or membrane cut-offs.

BARRIER NET ADHESIVE 200

SELF-ADHESIVE VAPOUR BARRIER SCREEN WITH REINFORCEMENT GRID

















TRANSPARENT AND SAFE

Quick to install, it can also be used as protection during construction.

RESISTANT AND NON-SLIP

The reinforcement grid provides high mechanical resistance and reduces the risk of slipping.

COMPOSITION

top layer

PE functional film

middle layer

PE reinforcing grid

bottom laver

PE functional film

acrylate dispersion without solvents


release liner

precut removable plastic film

CODES AND DIMENSIONS

CODE	description	mass per unit area	liner	Н	L	Α	Н	L	Α
		[g/m ²]	[mm]	[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]
BARA200	BARRIER NET ADHESIVE 200	200	-	1,45	50	72,5	4,8	164	780
BARAS200	BARRIER NET ADHESIVE 200 STRIPE	200	-	0,36	50	18,0	1.18	164	194

Available in different configurations on request. It is possible to customise the mass per unit area of the membrane, the amount of acrylic glue, the size and the pre-cut of the liner. Download the full data sheet at www.rothoblaas.com.

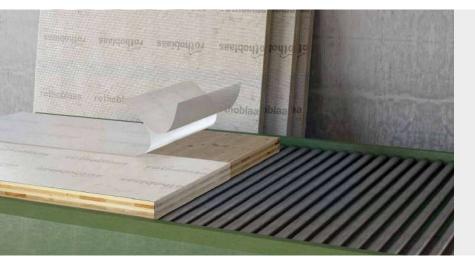

FAST INSTALLATION

The fully self-adhesive surface of the membrane allows fast and safe installation without compromising performance.

CONSTRUCTION SITE

During construction, it is essential to protect the structure, especially if the architectural design foresees that the wood remains visible in the finished building.

SIMPLIFY YOUR INSTALLATION WITH OUR SELF-ADHESIVE MEMBRANES



Our range of self-adhesive membranes is constantly expanding. Our BARRIER, BARRIER ALU, VAPOR IN, CLIMA CONTROL, VAPOR, TRASPIR and BYTUM membranes can take on added value in the self-adhesive version: thanks to the glue, they are quick to apply and can be used both as protection during construction and as a functional layer within the layers.

Scan the QR code or visit our website to see what's new!








I REFLECTIVE MEMBRANES

Reflective membranes offer a benefit in both winter and summer.

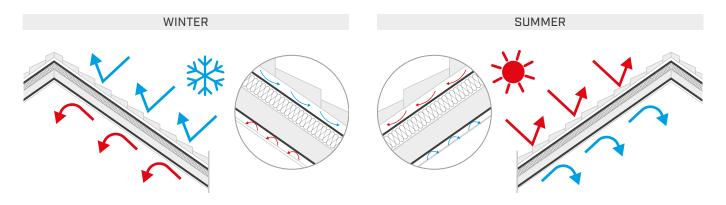

In winter, aluminium finished membranes applied indoor and coupled with an air gap, reflecting heat back into the interior transform the gap into an insulating layer and increase thermal performance.


Reflective membranes on the outdoor side provide a benefit during the hot season because they reflect heat outwards, rejecting incoming heat.

Thermal stress affects materials; reducing it through the use of reflective membranes increases the durability of materials in the inner layers.

This is why reflective membranes offer superior thermal insulation, effective material protection and generally increase the performance of the roof.

CALCULATION EXAMPLE

Example of thermal calculation with and without reflective membranes using the method proposed in ISO 6946.

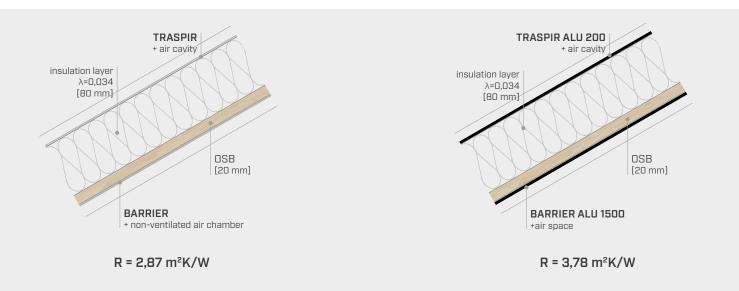

In this calculation example, using reflective membranes results in a 32% increase in the thermal resistance of the layers and an increase in the performance of the panels.

I BARRIER ALU NET SD150

REFLECTIVE VAPOUR BARRIER Sd 150 m

100 g/m²

















3,0 m



COMPOSITION

top layer functional aluminised PE film

middle layer PE reinforcing grid

bottom layer PE functional film



■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	100 g/m ²	0.33 oz/ft ²
Thickness	EN 1849-2	0,2 mm	8 mil
Water vapour transmission (Sd)	EN 1931	150 m	0.023 US perm
Maximum tensile force MD/CD	EN 12311-2	> 230 / 230 N/50mm	> 26 / 26 lb/in
Elongation MD/CD	EN 12311-2	15 / 10 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 110 / 110 N	> 25 / 25 lbf
Watertightness	EN 1928	conforming	-
Indirect exposure to UV rays	-	2 weeks	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,39 W/(m·K)	0.23 BTU/h·ft·°F
Specific heat	-	1700 J/(kg·K)	-
Density	-	approx. 500 kg/m ³	approx. 0.29 oz/in ³
Water vapour resistance factor (μ)	-	approx. 7500000	approx. 750 MNs/g
VOC content	-	0 %	-
Reflectivity	EN 15976	approx. 50 %	-
Equivalent thermal resistance with 50 mm air gap ($\epsilon_{\text{other surface}}$ 0,025-0,88)	ISO 6946	$R_{g,0,025}$: 0,799 (m ² K)/W $R_{g,0,88}$: 0,304 (m ² K)/W	

CODES AND DIMENSIONS

CODE	description	mass per unit area	tape	roll	Н	L	Α	Н	L	Α	
		[g/m ²]		[m]	[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
BARALU150	BARRIER ALU NET SD150	100	-	1,5 x 50	1,5	50	75	5	164	807	80
BARALUTT150	BARRIER ALU NET SD150 TT	100	TT	1,5 x 50	1,5	50	75	5	164	807	80
BARALU15030	BARRIER ALU NET SD150 3,0 m	100	-	3,0 x 50	3	50	150	10	164	1615	45

BARRIER ALU NET SD1500

REFLECTIVE VAPOUR BARRIER Sd > 1500 m













USA





B-s1,d0





Thanks to its composition, the membrane is not affected by mechanical stress or by staples and nails.

REFLECTIVE

Thanks to its ability to reflect up to 70% of the heat, the membrane improves the thermal performance of the construction panels.

REACTION TO FIRE B-s1,d0

Self-extinguishing membrane that does not spread the flame in case of fire contributing to the protection of the structure.

COMPOSITION

top layer functional aluminised PE film

middle layer PE reinforcing grid

bottom layer PE film

CODES AND DIMENSIONS

CODE	description	mass per unit area	tape	Н	L	Α	Н	L	Α	
		[g/m ²]		[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
BARALU1500	BARRIER ALU NET SD1500	200	-	1,5	50	75	5	164	807	30



ENERGY SAVING

The reflectivity of the membrane improves the energy performance of the construction panels as it reflects heat inwards increasing thermal resistance.

SAFETY

Thanks to its B-s1,d0 fire rating, the membrane is self-extinguishing in the event of contact with an open flame, providing greater safety both during construction and after the building has been completed.

■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	200 g/m ²	0.66 oz/ft ²
Thickness	EN 1849-2	0,15 mm	6 mil
Water vapour transmission (Sd) ⁽¹⁾	EN 1931	4000 m	0.001 US perm
Maximum tensile force MD/CD ⁽²⁾	EN 12311-2	465 / 495 N/50mm	46 / 46 lb/in
Elongation MD/CD ⁽²⁾	EN 12311-2	26 / 19 %	-
Resistance to nail tearing MD/CD ⁽²⁾	EN 12310-1	400 / 400 N	67 / 67 lbf
Watertightness	EN 1928	conforming	-
Indirect exposure to UV rays	-	4 weeks	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class B-s1,d0	
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,39 W/(m·K)	0.23 BTU/h·ft·°F
Specific heat	-	1700 J/(kg·K)	-
Density	-	approx. 1330 kg/m ³	approx. 0.77 oz/in ³
Water vapour resistance factor (µ)	-	approx. 26000000	approx. 20000 MNs/g
VOC content	-	0 %	-
Reflectivity	EN 15976	approx. 70 %	-
Equivalent thermal resistance with 50mm air gap (ϵ_{other}	ISO 6946	$R_{g,0,025}$: 0,801 (m ² K)/W	4.56 h·ft²·°F/BTU
surface 0,025-0,88)	150 0540	$R_{g,0,88}$: 0,406 (m ² K)/W	2.30 h·ft²·°F/BTU

⁽¹⁾ Sd = 4000 m (-2500 / + 4000).

■ FIRE PROTECTION



FIRE SEALING page 122 -124



FIRE FOAM page 118



FIRE STRIPE page 130



FRONT BAND UV 210 page 98



MECHANICAL STRENGTH

The composition of the product and the reinforcement grid guarantee excellent dimensional stability even when installed on a soft, non-continuous support and therefore with possible mechanical stresses.

⁽²⁾ Average values obtained from laboratory tests. Consult the Declaration of Performance for the minimum values.

BARRIER ALU FIRE A2 SD2500 140 g/m²



REFLECTIVE AIR VAPOUR BARRIER FIRE REACTION CLASS A2-s1,d0



















NON-COMBUSTIBLE A2-s1.d0

Product tested according to EN 13501-1 and classified as non-combustible material.

ENERGY EFFICIENCY

The reflectivity of the membrane improves the energy performance of the construction panels: reflecting heat inwards up to 95% it increases thermal resistance.

SAFETY

As it is non-combustible, it can also be used in combination with photovoltaic systems or at electrical voltage points.



COMPOSITION

top layer aluminium film

bottom layer fibreglass fabric

CODES AND DIMENSIONS

CODE	description	mass per unit area	tape	Н	L	Α	Н	L	Α	
		[g/m ²]		[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
BARALUFIR2500	BARRIER ALU FIRE A2 SD2500	140	-	1,2	50	60	4	164	646	48



RELIABLE

Thanks to the special aluminium film, it is extremely UV-stable, ageing-resistant and non-combustible, offering protection even on the construction site.

MECHANICAL STRENGTH AND STABILITY

The combination of aluminium cladding and glass fibre reinforcement ensures high mechanical performance that remains unchanged over time.

■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	140 g/m ²	0.46 oz/ft ²
Thickness	EN 1849-2	0,1 mm	4 mil
Water vapour transmission (Sd) ⁽¹⁾	EN 1931	2500 m	0.001 US perm
Maximum tensile force MD/CD ⁽¹⁾	EN 12311-2	1362 / 1349 N/50mm	156 / 154 lb/in
Elongation MD/CD ⁽¹⁾	EN 12311-2	2,8 / 3,8 %	-
Resistance to nail tearing MD/CD ⁽¹⁾	EN 12310-1	150 / 150 N	34 / 34 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class A2-s1,d0	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,0001 W/(m·K)	0 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 1000 kg/m ³	approx. 0.58 oz/in ³
Water vapour resistance factor (μ)	-	approx. 25000000	approx. 12500 MNs/g
VOC content	-	0 %	-
Reflectivity	EN 15976	95 %	-
Equivalent thermal resistance with 50mm air gap (ϵ_{other}	ISO 6946	$R_{g,0,025}$: 0,821 (m ² K)/W	4.66 h·ft².°F/BTU
surface 0,025-0,88)	150 6946	$R_{g,0,88}$: 0,731 (m ² K)/W	4.15 h·ft²·°F/BTU
UV stability ⁽²⁾	EN 13859-1/2	9 months	
Exposure to weather ⁽²⁾		16 weeks	

⁽¹⁾ Average values obtained from laboratory tests. Consult the Declaration of Performance for the minimum values. (2) For the correlation between laboratory tests and actual conditions, see page 199.

■ FIRE PROTECTION



FIRE SEALING page 122 -124



FIRE FOAM page 118



FIRE STRIPE page 130



FRONT BAND UV 210 page 98



COMPLETE BARRIER

Maximum resistance to the passage of water vapour. Thanks to its ability to reflect up to 95% of heat, it also improves the thermal performance of the construction panels.

I VAPOR IN 120

VAPOUR CONTROL MEMBRANE

























COMPOSITION

top layer vapour control PP film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	120 g/m ²	0.39 oz/ft ²
Thickness	EN 1849-2	0.4 mm	16 mil
Water vapour transmission (Sd)	EN 1931	30 m	0.14 US perm
Maximum tensile force MD/CD ⁽¹⁾	EN 12311-2	220 / 180 N/50mm	25 / 21 lb/in
Elongation MD/CD ⁽¹⁾	EN 12311-2	47 / 68 %	-
Resistance to nail tearing MD/CD ⁽¹⁾	EN 12310-1	160 / 205 N	36 / 46 lbf
Watertightness	EN 1928	conforming	-
Indirect exposure to UV rays	-	2 weeks	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 290 kg/m ³	approx. 0.17 oz/in³
Water vapour resistance factor (µ)	-	approx. 75000	approx. 150 MNs/g
VOC content	-	0 %	-

 $^{^{(1)}}$ Average values obtained from laboratory tests. Consult the Declaration of Performance for the minimum values.

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
VV120	VAPOR IN 120	-	1,5	50	75	5	164	807	36
VV12030	VAPOR IN 120 3,0 m	-	3	50	150	10	164	1615	30

I VAPOR IN NET 140

VAPOUR CONTROL MEMBRANE

WITH REINFORCEMENT GRID



















A Önorm B3667 DB





COMPOSITION

top layer vapour control PP film

reinforcing layer reinforcing PP grid

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	140 g/m ²	0.46 oz/ft ²
Thickness	EN 1849-2	0,15 mm	6 mil
Water vapour transmission (Sd)	EN 1931	30 m	0.14 US perm
Maximum tensile force MD/CD ⁽¹⁾	EN 12311-2	390 / 360 N/50mm	45 / 41 lb/in
Elongation MD/CD ⁽¹⁾	EN 12311-2	18 / 16 %	-
Resistance to nail tearing MD/CD ⁽¹⁾	EN 12310-1	280 / 260 N	63 / 58 lbf
Watertightness	EN 1928	conforming	-
Indirect exposure to UV rays	-	2 weeks	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	0 m ³ /(m ² h50Pa)	0 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 933 kg/m ³	approx. 0.54 oz/in³
Water vapour resistance factor (μ)	-	approx. 167000	approx. 150 MNs/g
VOC content	-	0 %	-

⁽¹⁾ Average values obtained from laboratory tests. Consult the Declaration of Performance for the minimum values.

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
VV140	VAPOR IN NET 140	-	1,5	50	75	5	164	807	35

SUSTAINABILITY






Environmental sustainability is an increasingly central issue in the construction sector and it has been taken into account in our company for a long time.

Although timber construction is in many respects more sustainable than other building systems, an assessment of the impacts linked to the entire life cycle of the products is still necessary in order to make an objective comparison between different building systems.

A suitable tool for this is the **EPD** (**Environmental Product Declaration**). This is a type III environmental declaration in accordance with EN ISO 14025 which, based on specific parameters, makes it possible to produce a technical document to use in order to make an objective comparison of the environmental impact of various products.

The EPD is a declaration based on **LCA** (**Life Cycle Assessment**) for which the study of all aspects related to the production, use and disposal of the product is required.

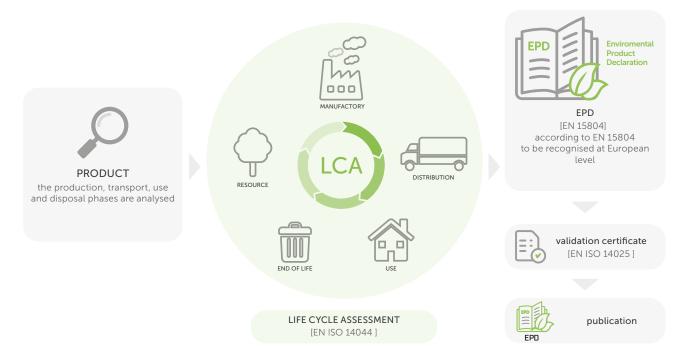

This is a voluntary initiative, not obligatory by law, which we have decided to implement to know the environmental impact of our products, and to allow the designer to have an accurate idea of the ecological footprint of the building he is designing. It is an ongoing process; over time other products will be added to the 16 products that currently have an EPD value.

SUSTAINABLE SOLUTION

PRODUCT		PAGE
BARRIER ALU NET SD1500	EPD	214
VAPOR IN 120	EPD	218
VAPOR IN NET 140	EPD	219
VAPOR IN GREEN 200	EPD	221
CLIMA CONTROL 80	EPD	228
CLIMA CONTROL NET 160	EPD	232
VAPOR 225	EPD	240
VAPOR EVO 190	LEA	238

PRODUCT		PAGE
TRASPIR 110	EPD	253
TRASPIR EVO UV 115	LCA	254
TRASPIR NET 160	EPD	261
TRASPIR EVO 160	EPD	262
TRASPIR EVO SEAL 200	EPD	266
TRASPIR EVO UV 210	EPD	270
TRASPIR EVO 220	EPD	274
TRASPIR EVO 300	EPD	282
TRASPIR DOUBLE EVO 340	EPD	284
TRASPIR WELD EVO 360	EPO	288

VAPOR IN GREEN 200

























COMPOSITION

top layer kraft paper reinforcing layer reinforcing grid

middle layer functional film

bottom layer kraft paper



TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	200 g/m ²	0.66 oz/ft ²
Thickness	EN 1849-2	0,35 mm	14 mil
Water vapour transmission (Sd)	EN 1931	7 m	0.5 US perm
Maximum tensile force MD/CD	EN 12311-2	> 250 / 170 N/50mm	> 29 / 19 lb/in
Elongation MD/CD	EN 12311-2	5 / 5 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 100 / 130 N	> 22 / 29 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Indirect exposure to UV rays	-	2 weeks	-
Thermal conductivity (λ)	-	0,13 W/(m·K)	0.08 BTU/h·ft·°F
Specific heat	-	1000 J/(kg·K)	-
Density	-	approx. 570 kg/m ³	approx. 0.33 oz/in ³
Water vapour resistance factor (µ)	-	approx. 20000	approx. 35 MNs/g
VOC content	-	0 %	-

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
VVG200	VAPOR IN GREEN 200	-	1,5	50	75	5	164	807	30

RECOMMENDATIONS FOR INSTALLATION: BARRIER, VAPOR AND CLIMA CONTROL

APPLICATION ON WALL - INTERNAL SIDE

















- BARRIER NET SD40, BARRIER SD150, BARRIER ALU NET SD150, BARRIER ALU NET SD1500, BARRIER ALU FIRE A2 SD2500, VAPOR IN 120, VAPOR IN NET 140, VAPOR IN GREEN 200, VAPOR NET 110, VAPOR 140, CLIMA CONTROL 80, CLIMA CONTROL NET 145 HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES
- MEMBRANE GLUE, ECO GLUE, SUPERB GLUE
- **3a** DOUBLE BAND, SUPRA BAND, BUTYL BAND ROLLER, FLY FOAM, FOAM CLEANER
- 3b ALU BAND, SEAL BAND, EASY BAND, SPEEDY BAND, FLEXI BAND, SOLID BAND, PLASTER BAND
- 4 PRIMER SPRAY, PRIMER
- 5 BYTUM BAND, PROTECT, FLEXI BAND, PLASTER BAND
- 6 NAIL PLASTER, GEMINI, NAIL BAND, BUTYL BAND

RECOMMENDATIONS FOR INSTALLATION: BARRIER, VAPOR AND **CLIMA CONTROL**


APPLICATION ON WINDOW - INTERNAL SIDE









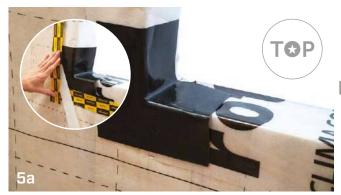







- BARRIER NET SD40, BARRIER SD150, BARRIER ALU NET SD150, BARRIER ALU NET SD1500, BARRIER ALU FIRE AZ SD2500, VAPOR IN 120, VAPOR IN NET 140, VAPOR IN GREEN 200, VAPOR NET 110, VAPOR 140, CLIMA CONTROL 80, CLIMA CONTROL NET 145 HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES
- 3 MARLIN, CUTTER
- **5a** ALPHA
- SEAL BAND, EASY BAND, FLEXI BAND, SOLID BAND, SMART BAND, PLASTER BAND, MANICA PLASTER

RECOMMENDATIONS FOR INSTALLATION: BARRIER, VAPOR AND **CLIMA CONTROL**



- 1a SUPRA BAND, BUTYL BAND
- 1b DOUBLE BAND, MEMBRANE GLU, ECO GLUE, SUPERB GLUE
- BARRIER NET SD40, BARRIER SD150, BARRIER ALU NET SD150, BARRIER ALU NET SD1500, BARRIER ALU FIRE AZ SD2500, VAPOR IN 120, VAPOR IN NET 140, VAPOR IN GREEN 200, CLIMA CONTROL 80, CLIMA CONTROL NET 145, CLIMA CONTROL NET 160, VAPOR NET 110, VAPOR 140, VAPOR NET 180
- MEMBRANE GLUE, ECO GLUE, SUPERB GLUE 3b DOUBLE BAND, SUPRA BAND, BUTYL BAND
- 3C SEAL BAND, EASY BAND, SPEEDY BAND, FLEXI BAND, SOLID BAND, PLASTER BAND, MANICA PLASTER

RECOMMENDATIONS FOR INSTALLATION: BARRIER, VAPOR AND CLIMA CONTROL

APPLICATION ON ROOF WINDOW - INTERNAL SIDE

















BARRIER NET SD40, BARRIER SD150, BARRIER ALU NET SD150, BARREIR ALU NET SD1500, BARRIER ALU FIRE A2 SD2500, VAPOR IN 120, VAPOR IN NET 140, VAPOR IN GREEN 200, CLIMA CONTROL 80, CLIMA CONTROL NET 145, CLIMA CONTROL NET 160, VAPOR NET 110, VAPOR 140, VAPOR NET 180 MARLIN, CUTTER

⁷a SEAL BAND, EASY BAND, FLEXI BAND, SOLID BAND, SMART BAND, PLASTER BAND, MANICA PLASTER 7b

I FLAT ROOF WITH CLIMA CONTROL




FLAT ROOF DESIGN

Verification of the thermo-hygrometric performance of a flat roof layer incorporating a variable vapour diffusion membrane (CLIMA CONTROL). In particular, the objective is to verify the drying of the layers, following a humidity accumulation phase.

The dimensions of construction panels used for the experimental phase were $1,2 \times 1,2$ m having the following characteristics:

- **BYTUM SLATE 3500** (Sd 280 m)
- **BYTUM BASE 2500** (Sd 200 m)
- **© OSB panel 20 mm** (Sd 5 m)
- (Sd 0,24 m)
- **© CLIMA CONTROL** (Sd 0,15-5 m)
- **12,5 mm fibre-gypsum board** (Sd 0,05 m)

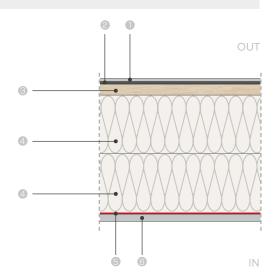


LABORATORY TEST

Given the innovative behaviour of the CLIMA CONTROL membrane, an initial measurement phase was carried out in the laboratory to verify the real behaviour of the proposed layers. After a conditioning phase in which the different layers were kept at high humidity (80%), the specimen was installed in the Multifunctional Façade Lab and the test phase was started under dynamic outdoor conditions in which the conditions of a central European summer climate (Munich) were reproduced. Already after 17 days, it was possible to notice the drying process and the decrease of moisture content within the layers.



SIMULATION WITH SOFTWARE

For the joint assessment of heat, moisture and matter transport in porous building materials With the data obtained from the laboratory test, it was possible to calibrate the model in order to extend the thermo-hygrometric study in various climates and for a long-term analysis (10 years).

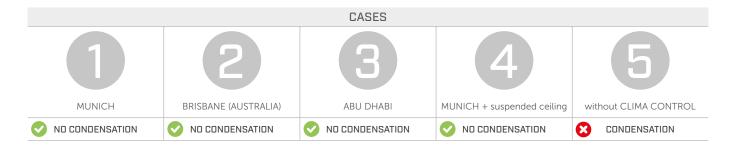

CONCLUSIONS

In all the cases simulated, the layers did not present any problems relating to the formation of condensation, suggesting that the application of the CLIMA CONTROL membrane is valid for preventing the excessive accumulation of humidity, also allowing the layers to dry in summer.

The presence of CLIMA CONTROL is decisive in periodically avoiding winter condensation phenomena towards the outermost layers, as demonstrated by the simulation of a Central European climate in the absence of the membrane.

The analysis of layers for a flat roof requires in-depth knowledge of technical physics and the ability to use specific software. A correct design and analysis of the layers is not easy and each situation requires a precise definition of the boundary conditions and the materials used.


WALL WITH CLIMA CONTROL



COLD AND HUMID OUTDOOR CLIMATE						
WINTER	INTERNAL	OUTDOOR				
CONDITIONS	T = 20°C U.R.= 40%	T = 0°C U.R.= 80%				

HOT AND HUMID OUTDOOR CLIMATE						
SUMMER	INTERNAL	OUTDOOR				
CONDITIONS	T = 26°C U.R.= 80%	T = 40°C U.R.= 70%				

SIMULATION WITH SOFTWARE

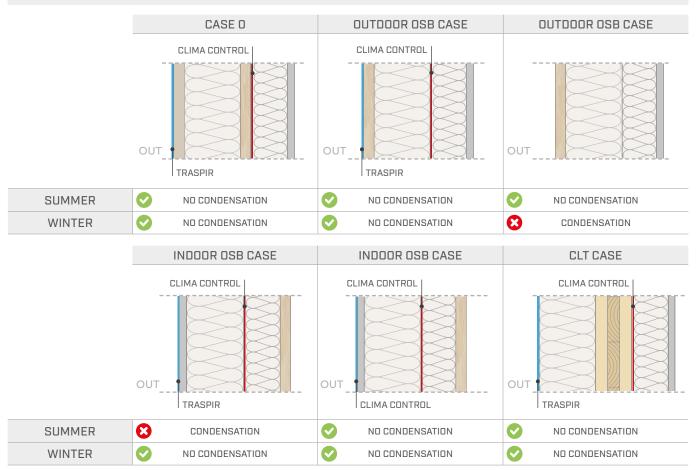

LABORATORY TEST

In order to recreate the desired boundary conditions, it was decided to use a fictitious climatic chamber built in the laboratory, which is very well insulated both thermally and in terms of vapour diffusion. The specimen formed one side of the craft chamber, which was placed inside a single-zone climatic chamber capable of generating the desired temperature and humidity conditions. Within the fictitious climatic chamber, the desired temperature and humidity conditions were created by means of a thermostat heater and the use of a specially mixed salt solution.



CONCLUSIONS

When comparing the various outputs, the importance of vapour control and breathable membranes to adequately regulate vapour flows through building packages becomes apparent.

It is also clear that the choice of location and type of membrane depends on the climatic conditions and the materials used.

In order to ensure optimal performance of the building casing, the processes of heat, vapour, air and wind transport that occur within the different components must be studied and controlled to avoid interstitial and surface condensation.

CLIMA CONTROL 80













MEMBRANE WITH VARIABLE VAPOUR DIFFUSION













VARIABLE DIFFUSION

Variable resistance to vapour diffusion: maximum protection for walls and excellent security in insulation.

TRANSPARENCY

Easy to install thanks to its transparent quality; controls the passage of water vapour based on climate and humidity.

SCIENTIFICALLY TESTED

The product has been researched and tested by external scientific bodies who have also simulated its behaviour in real conditions.

VARIABLE SD


COMPOSITION

top layer PA functional film

bottom layer non-woven PP fabric

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
CLIMA80	CLIMA CONTROL 80	-	1,5	50	75	5	164	807	81

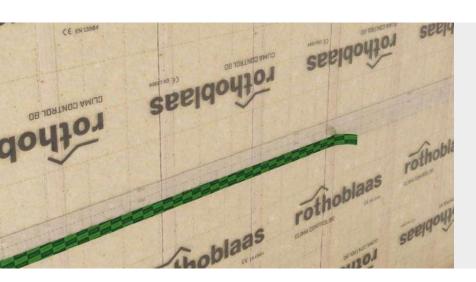

EASY INSTALLATION


Ideal for installation directly on the substructure (struts or joists), thanks to its slight transparency.

RETROFIT

Thanks to its ability to adapt vapour diffusion according to the hygrometric conditions of the materials it comes into contact with, it is ideal for energy refurbishment of existing buildings.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	80 g/m ²	0.26 oz/ft ²
Thickness	EN 1849-2	0,22 mm	9 mil
Variable water vapour transmission (Sd)	EN 1931	0,15 / 5 m	23 / 0.7 US perm
Dry/wet cup water vapour transmission	ASTM E96/ E96M	1.86/10.6 US perm	-
Dry/wet cup water vapour transmission	ASTM ESO, ESOM	106/605 ng/(s·m ² ·Pa)	-
Maximum tensile force MD/CD	EN 12311-2	> 120 / 90 N/50mm	> 14 / 10 lb/in
Elongation MD/CD	EN 12311-2	50 / 50 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 40 / 40 N	9 / 9 lbf
Watertightness	EN 1928	conforming	-
Indirect exposure to UV rays	-	2 weeks	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0 cfm/ft ² at 50Pa
Vapour barrier	ASTM E 2178-13	conforming	-
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,2 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	1700 J/(kg·K)	-
Density	-	approx. 400 kg/m ³	approx. 0.23 oz/in ³
Variable water vapour resistance factor (μ)	-	approx. 1000 / 25000	approx. 0,75/25 MNs/g
VOC content	-	0 %	-

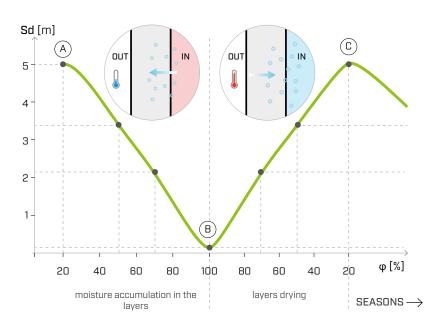

(A) DRY LAYERS : Sd 5 m

maximum protection - vapour control layer to limit the passage of vapour in view of the season when moisture accumulates within the layers

(B) HUMID LAYERS : Sd 0,15 m

<u>maximum breathability</u> - breathable membrane

to allow drying during the reverse steam diffusion phenomenon

C DRY LAYERS : Sd 5 m

<u>maximum protection</u> for the start of a new year and a new cycle



HYGROMETRIC PROPERTIES

The special PA film gives the product the ability to adapt to the hygrometric conditions of the building. If the membrane comes into contact with high humidity levels, it transforms from a vapour barrier into a breathable product, guaranteeing that the structure remains dry.

I CLIMA CONTROL NET 145



















ENERGY RECONDITIONING

Ideal to increase energy performance for packages and solutions for reconditioning of existing structures.

VARIABLE DIFFUSION

Variable resistance to vapour diffusion: maximum protection for walls and excellent security in insulation.

BLOWING

The reinforcement grid offers great resistance to the membrane, even in the event of pressure caused by the insulating material being blown.

VARIABLE SD

COMPOSITION

top layer PA functional film

reinforcing layer PE reinforcing grid

bottom layer non-woven PP fabric

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
CLIMA145	CLIMA CONTROL NET 145	-	1,5	50	75	5	164	807	36



REINFORCING GRID


The reinforcement grid ensures excellent dimensional stability even when laid on a soft, non-continuous support and therefore with possible mechanical stresses.

SAFETY

During installation of the insulation layer by means of blowing, mechanical stresses are created which the reinforcement grid can compensate for.

■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	145 g/m ²	0.48 oz/ft ²
Thickness	EN 1849-2	0,6 mm	24 mil
Variable water vapour transmission (Sd)	EN 1931	0,15 / 5 m	23 / 0.7 US perm
Maximum tensile force MD/CD	EN 12311-2	> 440 / 400 N/50mm	50 / 46 lb/in
Elongation MD/CD	EN 12311-2	> 15 / 15 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 300 / 250 N	67 / 56 lbf
Watertightness	EN 1928	conforming	-
Indirect exposure to UV rays	-	2 weeks	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	approx. 0,2 W/(m K)	0.12 BTU/h·ft·°F
Specific heat	-	approx. 1700 J/(kg·K)	-
Density	-	approx. 245 kg/m ³	approx. 0.14 oz/in ³
Variable water vapour resistance factor (μ)	-	approx. 250 / 8333	approx. 0.75/25 MNs/g
VOC content	-	0 %	-

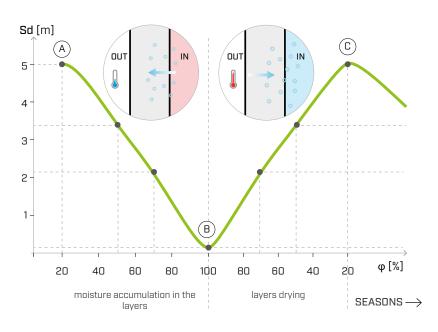

A DRY LAYERS : Sd 5 m

maximum protection - vapour control layer to limit the passage of vapour in view of the season when moisture accumulates within the layers

(B) HUMID LAYERS : Sd 0,15 m

maximum breathability - breathable mem-

to allow drying during the reverse steam diffusion phenomenon

C DRY LAYERS : Sd 5 m

maximum protection for the start of a new year and a new cycle



TRANSPARENCY

Easy to install thanks to the slightly transparent structure, it allows the interception of the underlying structure.

CLIMA CONTROL NET 160

























ENERGY RECONDITIONING

and excellent security in insulation.

Ideal to increase energy performance for packages and solutions for reconditioning of existing structures.

Variable resistance to vapour diffusion: maximum protection for walls

REINFORCING GRID

Thanks to its composition, the membrane is not affected by mechanical stresses caused by staples, nails or wear caused by walking.

VARIABLE SD

COMPOSITION

top layer non-woven PP fabric reinforcing layer PE reinforcing grid

middle layer PA functional film

bottom layer non-woven PP fabric

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
CLIMATT160	CLIMA CONTROL NET 160 TT	TT	1,5	50	75	5	164	807	25



WEAR RESISTANCE

During installation on the roof, mechanical stresses are created due to wear from walking, which the reinforcement grid can compensate for.

SMART


Is breathable when internal relative humidity is too high, and serves as a vapour control layer when internal humidity is at suitable levels.

TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	160 g/m ²	0.52 oz/ft ²
Thickness	EN 1849-2	0,5 mm	20 mil
Variable water vapour transmission (Sd)	EN 1931	0,5 / 5 m	7 / 0.7 US perm
Dry/wet cup water vapour transmission	ASTM E96/ E96M	2.86/7.91 US perm 153/452 ng/(s·m ² ·Pa)	- -
Maximum tensile force MD/CD ⁽¹⁾	EN 12311-2	400 / 270 N/50mm	46 / 31 lb/in
Elongation MD/CD ⁽¹⁾	EN 12311-2	20 / 20 %	-
Resistance to nail tearing MD/CD ⁽¹⁾	EN 12310-1	240 / 250 N	54 / 56 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 320 kg/m ³	approx. 0.18 oz/in ³
Variable water vapour resistance factor (μ)	-	approx. 1000 / 10000	approx. 2.5/25 MNs/g
VOC content	-	0 %	-
UV stability ⁽²⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽²⁾	-	4 weeks	-
Water column	ISO 811	> 250 cm	> 98 in

⁽¹⁾ Average values obtained from laboratory tests. Consult the Declaration of Performance for the minimum values.

⁽²⁾ For the correlation between laboratory tests and actual conditions, see page 199.

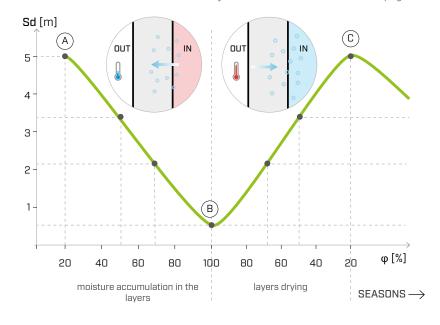

(A) DRY LAYERS : Sd 5 m


maximum protection - vapour control layer to limit the passage of vapour in view of the season when moisture accumulates within the layers

(B) HUMID LAYERS : Sd 0,5 m

maximum breathability - breathable memto allow drying during the reverse steam diffusion phenomenon

(C) DRY LAYERS : Sd 5 m

maximum protection for the start of a new year and a new cycle

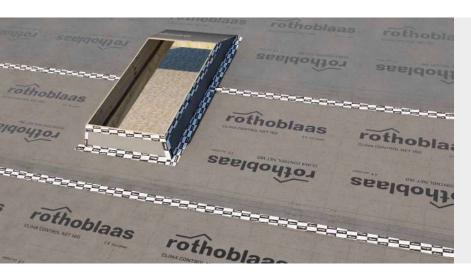

HYGROMETRIC PROPERTIES

The special PA film gives the product the ability to adapt to the hygrometric conditions of the building. If the membrane comes into contact with high humidity levels, it transforms from a vapour control layer into a breathable product, guaranteeing that the structure remains dry.

VAPOR NET 110





















COMPOSITION

top layer PE vapour control film

reinforcing layer PE reinforcing grid

bottom layer non-woven PP fabric



TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	110 g/m ²	0.36 oz/ft ²
Thickness	EN 1849-2	0,3 mm	12 mil
Water vapour transmission (Sd)	EN 1931	5 m	0.7 US perm
Maximum tensile force MD/CD	EN 12311-2	> 200 / 250 N/50mm	23 / 29 lb/in
Elongation MD/CD	EN 12311-2	> 25 / 25 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 170 / 170 N	38 / 38 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance		-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 370 kg/m ³	approx. 0.21 oz/in ³
Water vapour resistance factor (μ)	-	approx. 16700	approx. 25 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	2 weeks	-
Water column	ISO 811	> 250 cm	> 98 in

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
V110	VAPOR NET 110	-	1,5	50	75	5	164	807	36

VAPOR 140

(EN 19094

VAPOUR CONTROL MEMBRANE

















COMPOSITION

top layer non-woven PP fabric

middle layer vapour control PP film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Para Maria		.1	.1
Properties	standard	value	value
Mass per unit area	EN 1849-2	140 g/m ²	0.46 oz/ft ²
Thickness	EN 1849-2	0,45 mm	18 mil
Water vapour transmission (Sd)	EN 1931	10 m	0.35 US perm
Maximum tensile force MD/CD	EN 12311-2	> 230 / 180 N/50mm	26 / 21 lb/in
Elongation MD/CD	EN 12311-2	> 35 / 40 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 125 / 145 N	28 / 33 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class F	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 300 kg/m ³	approx. 0.17 oz/in ³
Water vapour resistance factor (μ)	-	approx. 25000	approx. 50 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
Water column	ISO 811	> 250 cm	> 98 in

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
V140	VAPOR 140	-	1,5	50	75	5	164	807	30

I VAPOR 150

CE

VAPOUR CONTROL MEMBRANE

















COMPOSITION

top layer non-woven PP fabric

middle layer vapour control PP film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

B			,
Properties	standard	value	value
Mass per unit area	EN 1849-2	150 g/m ²	0.49 oz/ft ²
Thickness	EN 1849-2	0,5 mm	20 mil
Water vapour transmission (Sd)	EN 1931	13 m	0.269 US perm
Maximum tensile force MD/CD	EN 12311-2	> 250 / 200 N/50mm	29 / 23 lb/in
Elongation MD/CD	EN 12311-2	> 35 / 40 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 130 / 150 N	29 / 34 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 300 kg/m ³	approx. 0.17 oz/in ³
Water vapour resistance factor (µ)	-	approx. 26000	approx. 65 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
Water column	ISO 811	> 250 cm	> 98 in

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
V150	VAPOR 150	-	1,5	50	75	5	164	807	30
VTT150	VAPOR 150 TT	TT	1,5	50	75	5	164	807	30

VAPOR NET 180





















COMPOSITION

top layer non-woven PP fabric

reinforcing layer reinforcing PP grid

middle layer

PE vapour control film

bottom layer

non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	180 g/m ²	0.59 oz/ft ²
Thickness	EN 1849-2	0,5 mm	20 mil
Water vapour transmission (Sd) ⁽¹⁾	EN 1931	10 m	0.35 US perm
Maximum tensile force MD/CD ⁽¹⁾	EN 12311-2	320 / 300 N/50mm	37 / 34 lb/inch
Elongation MD/CD ⁽¹⁾	EN 12311-2	10 / 10 %	-
Resistance to nail tearing MD/CD ⁽¹⁾	EN 12310-1	250 / 290 N	56 / 65 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,4 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1700 J/(kg·K)	-
Density	-	approx. 360 kg/m ³	approx. 0.2 oz/in ³
Water vapour resistance factor (μ)	-	approx. 20000	approx. 50 MNs/g
VOC content	-	0 %	-
UV stability ⁽²⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽²⁾	-	3 weeks	-

⁽¹⁾ Average values obtained from laboratory tests. Consult the Declaration of Performance for the minimum values.

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
V180	VAPOR NET 180	-	1,5	50	75	5	164	807	25
VTT180	VAPOR NET 180 TT	TT	1,5	50	75	5	164	807	25

⁽²⁾ For the correlation between laboratory tests and actual conditions, see page 199.

I VAPOR EVO 190





















NEW GENERATION

MEMBRANE

It is part of the EVO membrane family because it contains a special film that ensures durability and high UV stability.

HIGH PERFORMANCE VAPOUR CONTROL

UV STABILITY

Its formulation achieves UV stability for up to 6 months, offering maximum protection to the roof and underlying structure.

HIGH THERMAL RESISTANCE

The special mix of the functional film allows the product to guarantee its performance even when subjected to high thermal stress in extreme climatic conditions.

COMPOSITION

top layer


non-woven PP fabric

middle layer

EVO PE functional film


bottom layer

non-woven PP fabric

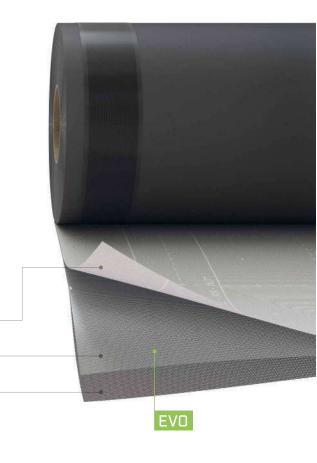

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
VEVO190	VAPOR EVO 190	-	1,5	50	75	5	164	807	25
VTTEVO190	VAPOR EVO 190 TT	TT	1,5	50	75	5	164	807	25

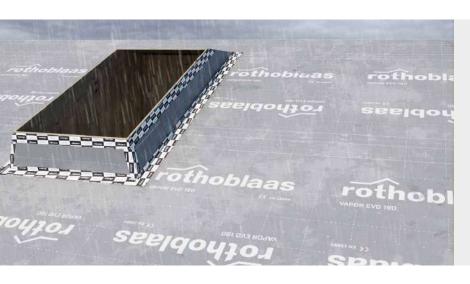

PROTECTION

Maximum protection against wear and hard rain during installation/construction.

The monolithic film ensures impermeability even under high mechanical wear and tear and contact with aggressive chemicals.

SECURE SEALING

Installation and sealant can be done perfectly, thanks to integrated double tape and the adherence offered by the lower support fabric.

■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	190 g/m ²	0.62 oz/ft ²
Thickness	EN 1849-2	0,6 mm	24 mil
Water vapour transmission (Sd)	EN 1931	5 m	0.699 US perm
Maximum tensile force MD/CD ⁽¹⁾	EN 12311-2	480 / 500 N/50mm	55 / 57 lb/in
Elongation MD/CD ⁽¹⁾	EN 12311-2	65 / 65 %	-
Resistance to nail tearing MD/CD ⁽¹⁾	EN 12310-1	265 / 320 N	60 / 72 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	40 / 100 °C	104 / 212 F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1700 J/(kg·K)	-
Density	-	approx. 316 kg/m ³	approx. 0.18 oz/in ³
Water vapour resistance factor (μ)	-	approx. 8300	approx. 25 MNs/g
VOC content	-	0 %	-
UV stability ⁽²⁾	EN 13859-1/2	6 months	-
Exposure to weather ⁽²⁾	-	10 weeks	-
Water column	ISO 811	600 cm	236 in

 $^{^{(1)}}$ Average values obtained from laboratory tests. Consult the Declaration of Performance for the minimum values. $^{(2)}$ For the correlation between laboratory tests and actual conditions, see page 199.

RELATED PRODUCTS



SMART BAND page 80



NAIL PLASTER page 126



LIZARD page 325



THERMAL AND CHEMICAL STABILITY

Resistant up to 100°C, it is not affected by chemicals that it may come into contact with during roof work or through pollution in the air.

VAPOR 225







VAPOUR CONTROL MEMBRANE

















RELIABLE


The mass per unit area of the membrane provides mechanical strength and protection during construction.

PROTECTION

It is also suitable for applications on uneven and rough supports, which could damage lighter vapour control layers.

COST/PERFORMANCE

Cost-effective membrane, ensuring high performance and protection against weathering.

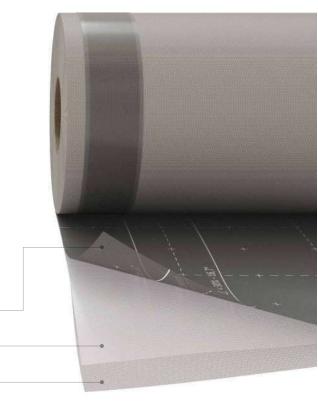

COMPOSITION

top layer non-woven PP fabric

middle layer vapour control PP film

bottom layer non-woven PP fabric

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
V225	VAPOR 225	-	1,5	50	75	5	164	807	20
VTT225	VAPOR 225 TT	TT	1,5	50	75	5	164	807	20



SECURE SEALING

The TT version offers fast installation and professional sealing thanks to the integrated double tape.

FLEXIBILITY

Although the membrane is very thick and resistant, its composition ensures great flexibility in processing without the risk of material wear.

■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	225 g/m ²	0.74 oz/ft ²
Thickness	EN 1849-2	0,8 mm	31 mil
Water vapour transmission (Sd)	EN 1931	4 m	0.874 US perm
Maximum tensile force MD/CD	EN 12311-2	> 380 / 300 N/50mm	> 43 / 34 lb/in
Elongation MD/CD	EN 12311-2	60 / 80 %	-
Resistance to nail tearing MD/CD	EN 12310-1	> 225 / 300 N	> 51 / 67 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft² at 50Pa
Water vapour resistance:			
- after artificial ageing	EN 1296 / EN 1931	conforming	-
- in the presence of alkalis	EN 1847 / EN 12311-2	npd	-
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 250 kg/m ³	approx. 0.14 oz/in ³
Water vapour resistance factor (μ)	-	approx. 5000	approx. 20 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
Water column	ISO 811	> 500 cm	> 197 in

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

■ RELATED PRODUCTS






NAIL PLASTER page 126



page 325

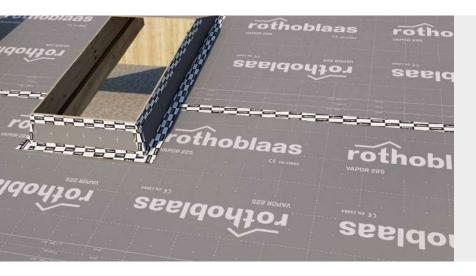

WEAR RESISTANCE

Thanks to its high mass per unit area, it ranks among the most massive vapour control layers on the market, providing protection for common construction phases.

VAPOR ADHESIVE 260

SELF-ADHESIVE VAPOUR CONTROL **MEMBRANE**



V.v.u. V.v.o.>90mm

ZVDH Dh

pare-va-peur E1 Sd3 TR1









SELF-ADHESIVE

Thanks to the innovative formula of the new generation glue, the membrane ensures good adhesion even on rough OSB.

SECURE SEALING

The adhesive surface prevents the formation of airflow behind the membrane in case of accidental breakage or failure to seal.

VERSATILE


It offers a solution both as protection during construction and as an effective and safe vapour control membrane.

COMPOSITION

top layer non-woven PP fabric middle layer vapour control PP film bottom layer non-woven PP fabric acrylate dispersion without solvents release liner precut removable plastic film

CODES AND DIMENSIONS

CODE	description	liner	Н	L	Α	Н	L	Α	
		[mm]	[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
VA260	VAPOR ADHESIVE 260	725 / 725	1,45	50	72,5	4,8	164	780	16
VAS260	VAPOR ADHESIVE 260 STRIPE	180 / 180	0,36	50	18	1.18	164	194	-

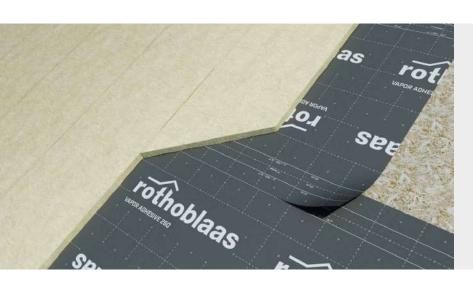

RAPIDITY

The fully self-adhesive surface allows fast and safe installation and does not compromise the performance of the product.

CONSTRUCTION SITE

During construction, it is essential to protect the structure, especially if it remains visible once the building is completed: VAPOR ADHESIVE 260 offers excellent protection.

■ TECHNICAL DATA

Properties	standard	value	value
Mass per unit area	EN 1849-2	260 g/m ²	0.85 oz/ft ²
Thickness	EN 1849-2	approx. 0,6 mm	approx. 24 mil
Water vapour transmission (Sd)	EN 1931	19 m	0.184 US perm
Water vapour transmission (dry cup)	ASTM E96/ E96M	0.2 US perm	-
Maximum tensile force MD/CD	EN 12311-2	> 250 / 200 N/50mm	43 / 34 lb/in
Resistance to nail tearing MD/CD	EN 12310-1	> 130 / 150 N	29 / 34 lbf
Watertightness	EN 1928	conforming	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	approx. 0,3 W/(m K)	0.17 BTU/h·ft·°F
Specific heat	-	approx. 1800 J/(kg·K)	-
Density	-	approx. 300 kg/m ³	approx. 0.17 oz/in ³
Water vapour resistance factor (μ)	-	approx. 31600	approx. 95 MNs/g
Joint strength	EN 12317-2	112 N/50mm	13 lb/in
UV stability ⁽¹⁾	EN 13859-1/2	2 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
Adhesion strength on steel at 180°	EN 12316-2	12 N/cm	7 lb/in
Storage temperature	-	5 / 25 °C	41/77 °F
Application temperature	-	-5 / 35 °C	23 / 95 °F

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

Available in different configurations on request. It is possible to customise the mass per unit area of the membrane, the amount of acrylic glue, the size and the pre-cut of the liner.

■ RELATED PRODUCTS



BARRIER NET ADHESIVE 200 page 210



TRASPIR ADHESIVE 260 page 276



SPECIAL GLUE

The acrylic dispersion glue has a specific formulation to prevent altering the vapour control membrane functions of the functional film inside the membrane.

■ RECOMMENDATIONS FOR INSTALLATION

APPLICATION ON CEILING













SEALING FASTENING SYSTEMS






- 1 SPEEDY BAND 300, FLEXI BAND, PLASTER BAND
- 2 PROTECT, BYTUM BAND PRIMER SPRAY, PRIMER

I RECOMMENDATIONS FOR INSTALLATION: CLIMA CONTROL 160 AND **VAPOR**

APPLICATION ON ROOF - EXTERNAL SIDE

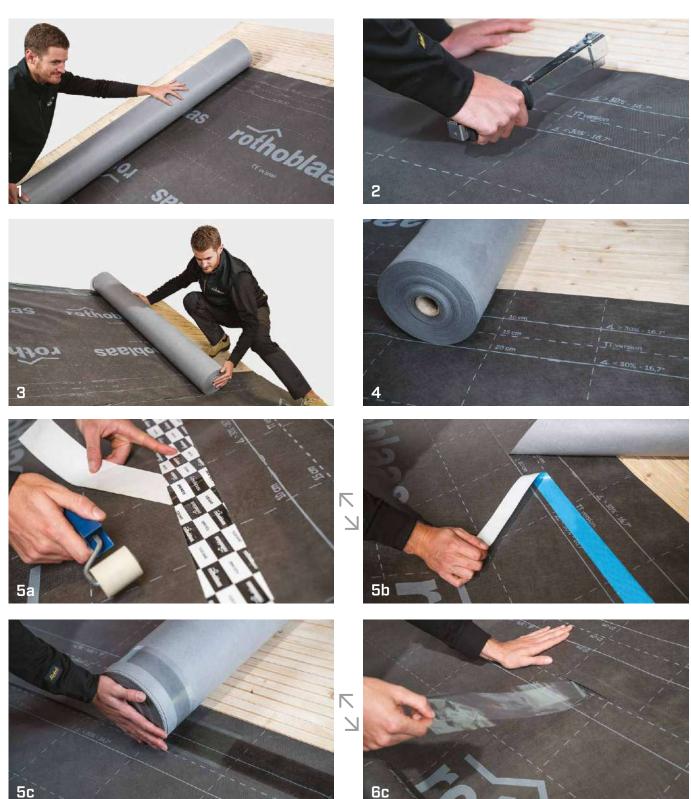

- 1 CLIMA CONTROL 160, VAPOR NET 110, VAPOR 140, VAPOR 150, VAPOR 150, VAVAPOR NET 180, VAPOR EVO 190, VAPOR 225
- 2 HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES
- $\mathbf{5a}$ $\overset{\mathsf{EASY}}{\mathsf{BAND}}, \mathsf{SPEEDY}$ $\mathsf{BAND}, \mathsf{FLEXI}$ $\mathsf{BAND}, \mathsf{FLEXI}$ BAND UV, SOLID $\mathsf{BAND}, \mathsf{PLASTER}$ BAND ROLLER
- **5b** DOUBLE BAND, SUPRA BAND, BUTYL BAND OUTSIDE GLUE

BREATHABLE


BREATHABLE

TRASPIR 95 HIGHLY BREATHABLE MEMBRANE FOR WALLS	TRASPIR EVO UV 210 HIGHLY BREATHABLE MONOLITHIC MEMBRANE RESISTANT TO UV RAYS
TRASPIR 110 HIGHLY BREATHABLE MEMBRANE253	TRASPIR EVO 220 HIGHLY BREATHABLE MONOLITHIC MEMBRANE274
TRASPIR EVO UV 115 HIGHLY BREATHABLE MONOLITHIC MEMBRANE RESISTANT TO UV RAYS	TRASPIR ADHESIVE 260 HIGHLY BREATHABLE SELF-ADHESIVE MEMBRANE
TRASPIR ALU 120 HIGHLY BREATHABLE MEMBRANE	TRASPIR DOUBLE NET 270 HIGHLY BREATHABLE MEMBRANE
TRASPIR 135 HIGHLY BREATHABLE MEMBRANE257	TRASPIR EVO 300 HIGHLY BREATHABLE MONOLITHIC MEMBRANE282
TRASPIR 150 HIGHLY BREATHABLE MEMBRANE	TRASPIR DOUBLE EVO 340 MONOLITHIC AND MICROPOROUS BREATHABLE MEMBRANE
TRASPIR NET 160 HIGHLY BREATHABLE MEMBRANE	TRASPIR WELD EVO 360 WELDABLE MONOLITHIC BREATHABLE MEMBRANE288
TRASPIR EVO 160 HIGHLY BREATHABLE MONOLITHIC MEMBRANE262	TRASPIR ALU FIRE A2 430 REFLECTIVE HIGHLY BREATHABLE MEMBRANE
TRASPIR 200 HIGHLY BREATHABLE MEMBRANE	TRASPIR METAL 3D MATS FOR METAL ROOFS
TRASPIR ALU 200 REFLECTIVE HIGHLY BREATHABLE MEMBRANE	3D MATS FOR METAL ROOFS294
TRASPIR EVO SEAL 200 HIGHLY BREATHABLE MONOLITHIC MEMBRANE, PERFORATION-PROOF	
TRASPIR FELT EVO UV 210 BREATHABLE MONOLITHIC MEMBRANE RESISTANT TO UV RAYS	

I MONOLITHIC AND MICROPOROUS

The family of synthetic breathable membranes and vapour control layers and barriers (that is, membranes made of materials deriving from polymers) offer different properties as a function of the production technologies and raw materials used in processing.

MICROPOROUS MEMBRANES

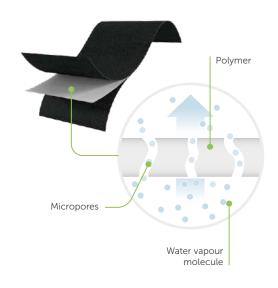


CHARACTERISTICS

Thermal stability	•00
Durability and stability with ageing	$\bullet \bullet \bigcirc$
UV stability	$\bullet \bullet \bigcirc$
Chemical stability	•00
Low reaction to fire	•00
Breathability (water vapour)	•••
Watertightness	$\bullet \bullet \bigcirc$
Airtightness	$\bullet \bullet \bigcirc$
Resistance to heavy rain	$\bullet \bullet \bigcirc$
Mechanical resistance	•••
Slipping resistance	•••
Resistance to pollutants	000

Membrane with functional microporous layer, obtained through mechanical processing during the production. Permeability to water vapour is entrusted to the capillary principle: the water molecule passes through the micropores in the functional film, enclosed in one or two protective layers.

Rothoblaas offers:TRASPIR 110, TRASPIR 150, TRASPIR 200.

MONOLITHIC MEMBRANES

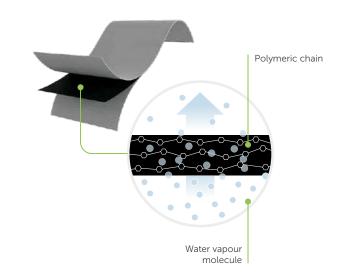

CHARACTERISTICS


Thermal stability	•••
Durability and stability with ageing	•••
UV stability	•••
Chemical stability	•••
Low reaction to fire	$\bullet \bullet \bigcirc$
Breathability (water vapour)	•••
Watertightness	•••
Airtightness	•••
Resistance to heavy rain	•••
Mechanical resistance	•••
Slipping resistance	$\bullet \bullet \bigcirc$
Resistance to pollutants	•••

Membranes with a homogeneous and continuous functional layer. The permeance of monolithic membranes is provided by the ability of the polymer of which they are composed to make a chemical interaction with water molecules. Some polymers, in fact, are able to activate a chemical interaction with water molecules and therefore to be crossed through, thus becoming breathable.

Rothoblaas offers: TRASPIR EVO 160, TRASPIR EVO 220, TRASPIR EVO 300.


Microscope image of a microporous membrane section.

Upper part: microporous film. Lower part: support and protection fibre filaments.



Microscope image of a monolithic membrane section. Upper part: monolithic film.

Lower part: support and protection fibre filaments.





Microporous films are made from hydrophobic polymers, which are themselves incapable of interacting with water and are generally more rigid. They require special processing to allow water to pass through them. This makes them more susceptible to pollutants.

Monolithic films are made from hydrophilic polymers, which are able to interact chemically with water and are generally more elastic.


MICROPOROUS MEMBRANES


LABORATORY TEST

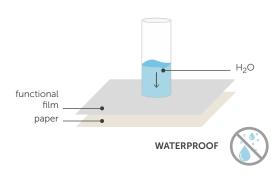

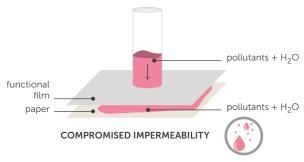


CASE ON SITE

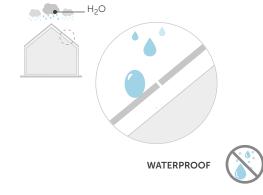


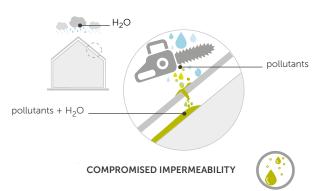


MONOLITHIC MEMBRANES


LABORATORY TEST

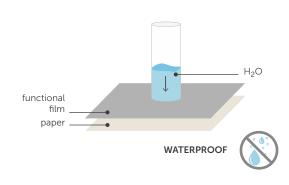

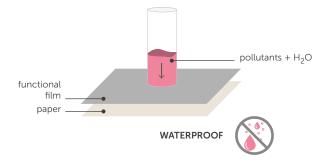

CASE ON SITE

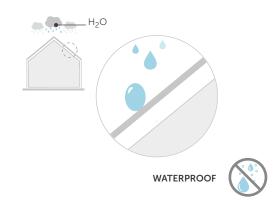

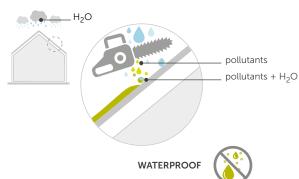



MICROPOROUS MEMBRANES

MONOLITHIC MEMBRANES

RESISTANCE TO ULTRAVIOLET RADIATION

RESISTANCE TO ULTRAVIOLET RADIATION

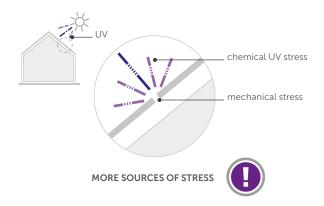

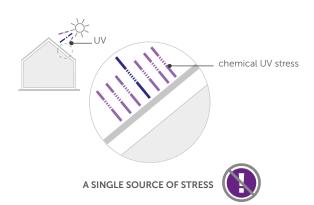

The more sources of stress act simultaneously, the greater the degradation of polymers. In the production process microporous films are subjected to mechanical stress. If a microporous membrane is exposed to ultraviolet radiation, chemical stress is added to the mechanical stress. Respecting the maximum UV exposure of the membrane is important in order not to compromise the durability of the functional film.


No mechanical or thermal stresses are created in the production process of monolithic films. Therefore, when a monolithic membrane is exposed to ultraviolet radiation, this is the only source of stress for the functional film and degradation is less than it would be for a microporous film. The UV resistance of monolithic membranes is generally higher. However, it is important to respect the maximum UV exposure of the membrane in order not to compromise the durability of the functional film.


WATER REPELLENCY

All membrane surfaces are designed to be water-repellent. Water repellency can be provided through the choice of materials or by exploiting the texture of the surface. This is an important feature because it helps to keep the membrane dry.

HYDROFOBICITY

In some cases (TRASPIR EVO 300), the surfaces are made hydrophobic with a special treatment to further reduce interaction with water (the mechanism of non-interaction with water is similar to that of water repellency but is even more pronounced).

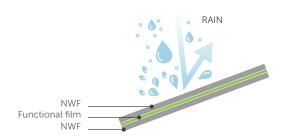

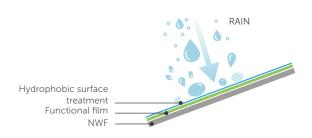

■ MATERIALS, PROPERTIES AND TECHNOLOGIES

The different characteristics of the products depend on production technology and raw materials used, which are generally VOC and solvent-free. Below is a list of polymers used in Rothoblaas products, and their relative specifications:

RAW MATERIAL USED FOR FUNCTIONAL FILM	STRENGTHS	FINISHED PRODUCT TECHNOLOGY	ROTHOBLAAS PRODUCTS USED IN
Acrylic	Thermal stabilityUV stabilityLow reaction to fire	Monolithic, spread in 2 layers	Breathable and highly breathable membranes (TRASPIR EVO 300)
Thermoplastic polyurethane (TPU or PU)	Thermal stabilityChemical stabilityFlexibility and workabilityUV	Monolithic, spread in 2 or 3 layers	Breathable and highly breathable membranes (TRASPIR WELD EVO 360)
Polyamide (PA)	 Variable resistance to penetration of water vapour Resistance to high temperatures 	Monolithic, spread in 2 or 3 layers	Membrane with variable vapour diffusion (CLIMA CONTROL 80)
Thermoplastic polyester (TPE)	 UV stability Thermal stability Mechanical resistance	Monolithic, 3 layers	Breathable and highly breathable membranes (TRASPIR EVO 220)
Polyethylene (PE)	Dimensional stabilityChemical stability	Monolithic, 2 or 3 layers	Vapour control membranes (BARRIER SD40), sheaths for foundation waterproofing (FLOOR RADON)
Polypropylene (PP)	Mechanical resistanceFlexibility and workabilityThermal stability	Microporous Monolithic, 2 or 3 layers	Highly breathable membranes (TRASPIR 150) Vapour control layers (VAPOR 150)

RAW MATERIAL USED FOR SUPPORT OR REINFORCING LAYER	STRENGTHS	FUNCTION
Aluminium	 Reflective Increases resistance to penetration of water vapour 	Coating and additive for aluminized products (BARRIER ALU FIRE A2 SD2500)
Polypropylene (PP)	Mechanical resistanceSlipping resistanceHigh flexibility and workability	Support or protective layers for microporous or monolithic membranes
Polyester (PL)	Thermal stabilityUV stabilityMechanical resistanceElasticity	Support for spread monolithic products (TRASPIR EVO UV 210)

TRASPIR 95











HIGHLY BREATHABLE MEMBRANE FOR WALLS

COMPOSITION

top layer non-woven PP fabric

middle layer PP breathable film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Barrier Co.		.1	1100		
Properties	standard	value	USC conversion		
Mass per unit area	EN 1849-2	95 g/m ²	0.31 oz/ft ²		
Thickness	EN 1849-2	0.4 mm	16 mil		
Water vapour transmission (Sd)	EN 1931	0,02 m	174.825 US perm		
Maximum tensile force MD/CD	EN 12311-1	210 / 120 N/50mm	24 / 14 lb/in		
Elongation MD/CD	EN 12311-1	50 / 90 %	-		
Resistance to nail tearing MD/CD	EN 12310-1	90 / 100 N	20 / 22 lbf		
Watertightness	EN 1928	class W1	-		
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F		
Reaction to fire	EN 13501-1	class E	-		
Resistance to penetration of air	EN 12114	$< 0.05 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.003 cfm/ft ² at 50Pa		
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft:°F		
Specific heat	-	1800 J/(kg·K)	-		
Density	-	approx. 238 kg/m ³	approx. 0.14 oz/in ³		
Water vapour resistance factor (μ)	-	approx. 50	approx. 0.1 MNs/g		
VOC content	-	0 %	-		
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-		
Exposure to weather ⁽¹⁾	-	2 weeks	-		
After ageing:					
- watertightness	EN 1297 / EN 1928	class W1	-		
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	150 / 90 N/50mm	22 / 22 lb/in		
- elongation	EN 1297 / EN 12311-1	40 / 45 %	-		
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F		

 $^{^{(\!1\!)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
T95	TRASPIR 95	-	1,5	50	75	5	164	807	42

I TRASPIR 110































COMPOSITION

top layer non-woven PP fabric

middle layer PP breathable film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
<u>'</u>			
Mass per unit area	EN 1849-2	112 g/m ²	0.37 oz/ft ²
Thickness	EN 1849-2	0.4 mm	16 mil
Water vapour transmission (Sd)	EN 1931	0,03 m	-
Water vapour transmission (dry cup)	ASTM E96/ E96M	101 US perm	-
water vapour transmission (dry cup)	ASTM L90/ L90M	5810 ng/(s·m ² ·Pa)	-
Maximum tensile force MD/CD	EN 12311-1	250 / 165 N/50mm	29 / 19 lb/in
Elongation MD/CD	EN 12311-1	50 / 70 %	-
Resistance to nail tearing MD/CD	EN 12310-1	115 / 135 N	26 / 30 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 264 kg/m ³	approx. 0.15 oz/in ³
Water vapour resistance factor (μ)	-	approx. 50	approx. 0.15 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	2 weeks	-
Water column	ISO 811	> 280 cm	> 110 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	220 / 145 N/50mm	25 / 17 lb/in
- elongation	EN 1297 / EN 12311-1	40 / 60 %	-
Flexibility at low temperatures	EN 1109	-30 °C	-22 °F
Driving rain test	TU Berlin	passed	-

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
T110	TRASPIR 110	_	1,5	50	75	5	164	807	36
T11030	TRASPIR 110 3,0 m	-	3	50	150	10	164	1615	36

TRASPIR EVO UV 115

HIGHLY BREATHABLE MONOLITHIC















MEMBRANE RESISTANT TO UV RAYS

SAFETY

High watertightness and excellent weather resistance thanks to the special extruded mix.

B-s1.d0

Flame retardant certification, Euroclass reaction to fire B-s1, d0 based on EN 13501-1.


PERMANENT UV STABILITY

Permanent resistance to UV rays with exposure with open joints up to 30 mm wide, and with up to 20% of the surface uncovered.

COMPOSITION

top layer highly UV-stable PP non-woven fabric

bottom layer breathable monolithic PU film

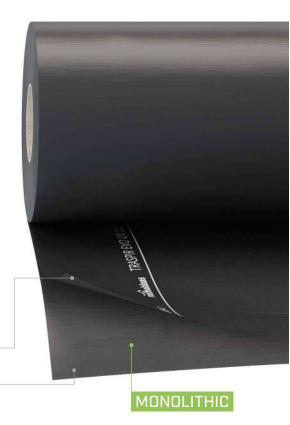

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TUV115	TRASPIR EVO UV 115	-	1,5	50	75	5	164	807	36



UV STABILITY

The special monolithic compound ensures high UV stability even with open-joint façades.

NON-FLAMMABLE

Thanks to the special chemical composition that is flame retardant, it is suitable for applications on facades in direct contact with the ventilation chamber, or in cases in which the product is visible in internal environments.

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	115 g/m ²	0.38 oz/ft ²
Thickness	EN 1849-2	0,3 mm	12 mil
Water vapour transmission (Sd)	EN 1931	0,08 m	43.706 US perm
Maximum tensile force MD/CD	EN 12311-1	150 / 110 N/50mm	17 / 13 lb/in
Elongation MD/CD	EN 12311-1	90 / 90 %	-
Resistance to nail tearing MD/CD	EN 12310-1	130 / 170 N	29 / 38 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class B-s1,d0	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 300 kg/m ³	approx. 0.17 oz/in ³
Water vapour resistance factor (µ)	-	approx. 270	approx. 0.4 MNs/g
VOC content	-	0 %	-
UV resistance without final coating ⁽¹⁾	EN 13859-1/2	4 months	-
Weathering without final cladding (1)	-	8 weeks	-
UV stability with joints up to 30 mm wide exposing no more than 20% of the surface	EN 13859-2	permanent	-
Water column	ISO 811	> 500 cm	> 197 in
After ageing:			
- watertightness at 100°C	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	> 98 / 72 N/50mm	> 11 / 8 lb/in
- elongation	EN 1297 / EN 12311-1	> 59 / 59 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F
Driving rain test	TU Berlin	passed	-

⁽¹⁾ Membrane subjected to artificial ageing test for 5000h (standard 336h). For correlation between laboratory tests and actual conditions, see page 199.

■ FIRE PROTECTION



FIRE SEALING page 122 -124



FIRE FOAM page 118



FIRE STRIPE page 130



FRONT BAND UV 210 page 98



INNOVATION

The membrane features an innovative technology that allows it to be used even on metal façades with high temperature fluctuations, without compromising its performance.

I TRASPIR ALU 120

















COMPOSITION

top layer aluminium film

bottom layer PP breathable film



■ TECHNICAL DATA

Properties	standard	value	value
<u>'</u>			
Mass per unit area	EN 1849-2	120 g/m ²	0.39 oz/ft ²
Thickness	EN 1849-2	0,6 mm	24 mil
Water vapour transmission (Sd)	EN 1931	0,1 m	34.965 US perm
Maximum tensile force MD/CD	EN 12311-1	239 / 204 N/50mm	27 / 23 lb/in
Elongation MD/CD	EN 12311-1	94 / 126 %	-
Resistance to nail tearing MD/CD	EN 12310-1	187 / 232 N	42 / 52 lbf
Watertightness	EN 1928	class W2	-
Temperature resistance	-	-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.05 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.003 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 200 kg/m ³	approx. 0.11 oz/in³
Water vapour resistance factor (μ)	-	approx. 166	approx. 0,5 MNs/g
VOC content	-	0 %	-
Reflectivity	EN 15976	81 %	-
Equivalent thermal resistance with 50 mm air gap		$R_{q,0,025}$: 0,804 (m ² K)/W	4.57 h·ft²·°F/BTU
$(\epsilon_{\text{other surface}} 0.025 - 0.88)$	ISO 6946	$R_{g,0,88}$: 0,502 (m ² K)/W	2.85 h·ft²·°F/BTU
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	2 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W2	_
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	167 / 155 N/50mm	19 / 18 lb/in
- elongation	EN 1297 / EN 12311-1	56 / 75 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TALU120	TRASPIR ALU 120	-	1,5	50	75	5	164	807	26
TALU12030	TRASPIR ALU 120 3,0 m	-	3	100	300	10	328	3230	12

I TRASPIR 135

HIGHLY BREATHABLE MEMBRANE





















COMPOSITION

top layer non-woven PP fabric

middle layer PP breathable film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	135 g/m ²	0.44 oz/ft ²
Thickness	EN 1849-2	0,6 mm	24 mil
Water vapour transmission (Sd)	EN 1931	0,02 m	174.825 US perm
Maximum tensile force MD/CD	EN 12311-1	280 / 190 N/50mm	32 / 22 lb/in
Elongation MD/CD	EN 12311-1	70 / 110 %	-
Resistance to nail tearing MD/CD	EN 12310-1	135 / 170 N	30 / 38 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Surface combustion characteristic	ASTM E84	class 1 or class A	
Resistance to penetration of air	EN 12114	$< 0.05 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.003 cfm/ft ² at 50Pa
Thermal conductivity (λ)	·	0,3 W/(m·K)	0.17 BTU/h·ft:°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 225 kg/m ³	approx. 0.13 oz/in ³
Water vapour resistance factor (μ)	-	approx. 33	approx. 0.1 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	2 weeks	-
Water column	ISO 811	> 250 cm	> 98 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	250 / 160 N/50mm	29 / 18 lb/in
- elongation	EN 1297 / EN 12311-1	50 / 50 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F


 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
T135	TRASPIR 135	-	1,5	50	75	5	164	807	28
TTT135	TRASPIR 135 TT	TT	1,5	50	75	5	164	807	28

■ RECOMMENDATIONS FOR INSTALLATION: TRASPIR

APPLICATION ON WALL - EXTERNAL SIDE

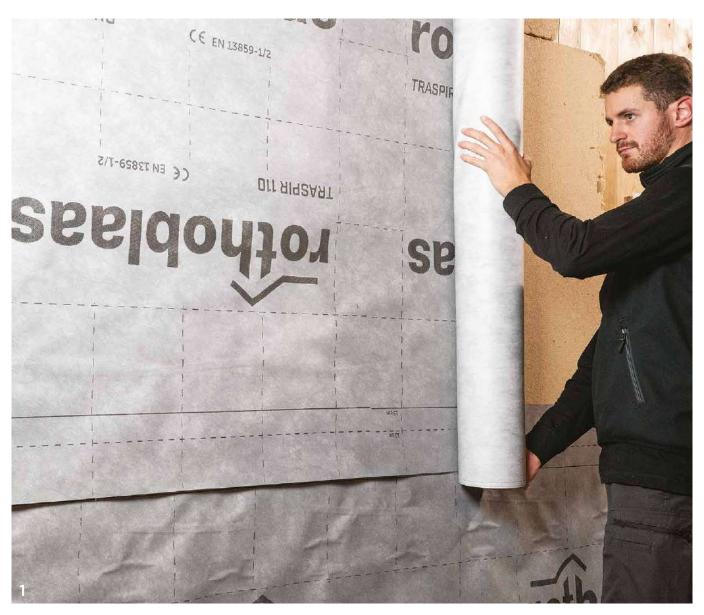





2b ALU BAND, EASY BAND, SPEEDY BAND, FLEXI BAND, FLEXI BAND UV, FACADE BAND, SOLID BAND, PLASTER BAND

TRASPIR 95, TRASPIR 110, TRASPIR ALU 120, TRASPIR 135, TRASPIR 150, TRASPIR EVO 160, TRASPIR ALU FIRE A2 430

DOUBLE BAND, SUPRA BAND, BUTYL BAND 2a OUTSIDE GLUE

■ RECOMMENDATIONS FOR INSTALLATION: TRASPIR

APPLICATION ON WINDOW - EXTERNAL SIDE














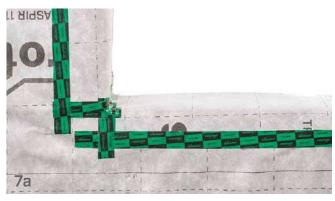



- 1 TRASPIR 95, TRASPIR 110, TRASPIR SUNTEX 120, TRASPIR 135, TRASPIR 150, TRASPIR EVO 160, TRASPIR ALU FIRE A2 430
- 2 MARLIN, CUTTER
- **5** HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES
- EASY BAND, SPEEDY BAND, FLEXI BAND, FLEXI BAND UV, FACADE BAND, SOLID BAND, SMART BAND, PLASTER BAND

I TRASPIR 150

HIGHLY BREATHABLE MEMBRANE



























COMPOSITION

top layer non-woven PP fabric

middle layer PP breathable film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	150 g/m ²	0.49 oz/ft ²
Thickness	EN 1849-2	0,7 mm	28 mil
Water vapour transmission (Sd)	EN 1931	0,02 m	-
Water vapour transmission (dry cup)	ASTM E96/ E96M	125 US perm	-
water vapour transmission (dry cup)	A31M E90/ E90M	7115 ng/(s·m ² ·Pa)	-
Maximum tensile force MD/CD	EN 12311-1	350 / 210 N/50mm	40 / 24 lb/in
Elongation MD/CD	EN 12311-1	100 / 125 %	-
Resistance to nail tearing MD/CD	EN 12310-1	190 / 225 N	43 / 51 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance		-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.04 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.002 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 215 kg/m ³	approx. 0.12 oz/in ³
Water vapour resistance factor (μ)	-	approx. 40	approx. 0.1 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	2 weeks	-
Water column	ISO 811	> 250 cm	> 98 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	310 / 180 N/50mm	35 / 21 lb/in
- elongation	EN 1297 / EN 12311-1	45 / 60 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
T150	TRASPIR 150	-	1,5	50	75	5	164	807	25
TTT150	TRASPIR 150 TT	TT	1,5	50	75	5	164	807	25
T15030	TRASPIR 150 3,0 m	-	3	50	150	10	164	1615	25

I TRASPIR NET 160

HIGHLY BREATHABLE MEMBRANE

























COMPOSITION

top layer

non-woven PP fabric

reinforcing layer reinforcing PP grid

middle layer PP breathable film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	160 g/m ²	0.52 oz/ft ²
Thickness	EN 1849-2	0,7 mm	28 mil
Water vapour transmission (Sd)	EN 1931	0,02 m	174.825 US perm
Maximum tensile force MD/CD	EN 12311-1	420 / 420 N/50mm	48 / 48 lb/in
Elongation MD/CD	EN 12311-1	25 / 20 %	-
Resistance to nail tearing MD/CD	EN 12310-1	390 / 360 N	88 / 81 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.035 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.002 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,04 W/(m·K)	0.02 BTU/h·ft·°F
Specific heat	-	1568 J/(kg·K)	-
Density	-	approx. 230 kg/m ³	approx. 0.13 oz/in ³
Water vapour resistance factor (μ)	-	approx 28	approx. 0.1 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
Water column	ISO 811	> 500 cm	> 197 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	385 / 390 N/50mm	44 / 45 lb/in
- elongation	EN 1297 / EN 12311-1	20 / 15 %	-
Flexibility at low temperatures	EN 1109	-20 °C	-4 °F
Driving rain test	TU Berlin	passed	-

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
T160	TRASPIR NET 160	-	1,5	50	75	5	164	807	25
TTT160	TRASPIR NET 160 TT	TT	1,5	50	75	5	164	807	25

I TRASPIR EVO 160

HIGHLY BREATHABLE MONOLITHIC



























MONOLITHIC

MEMBRANE

The monolithic structure of the membrane guarantees excellent durability over time, thanks to the special polymers used.

REACTION TO FIRE B-s1,d2

Self-extinguishing membrane which does not spread the flame in case of fire, contributing to the protection of the structure.

HIGH UV STABILITY

It passed the artificial ageing test involving exposure to UV light for 1000 hours.

COMPOSITION

top layer


non-woven PP fabric

middle layer

breathable monolithic TPE film

bottom layer

non-woven PP fabric

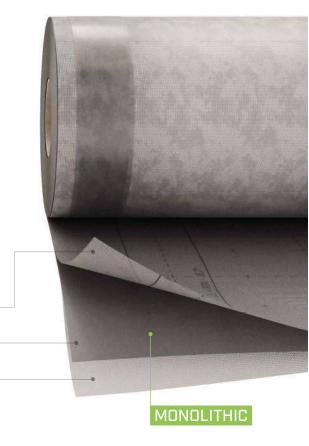

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TEVO160	TRASPIR EVO 160	-	1,5	50	75	5	164	807	30
TTTEVO160	TRASPIR EVO 160 TT	TT	1,5	50	75	5	164	807	30



SECURE SEALING

The TT version offers fast installation and professional sealing thanks to the integrated double tape.

HEAVY RAIN

High protection against heavy rain during temporary exposure to weather during construction.

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	160 g/m ²	0.52 oz/ft ²
Thickness	EN 1849-2	0,5 mm	20 mil
Water vapour transmission (Sd)	EN 1931	0,1 m	-
Water vapour transmission (dry cup)	ASTM E96/ E96M	12.3 US perm 702 ng/(s·m²·Pa)	-
Maximum tensile force MD/CD	EN 12311-1	280 / 220 N/50mm	32 / 25 lb/in
Elongation MD/CD	EN 12311-1	50 / 60 %	-
Resistance to nail tearing MD/CD	EN 12310-1	180 / 200 N	40 / 45 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class B-s1,d2	-
Flammability index	AS 1530.2	1	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,4 W/(m·K)	0.23 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 370 kg/m ³	approx. 0.21 oz/in ³
Water vapour resistance factor (μ)	-	approx. 160	approx. 0,5 MNs/g
Joint strength	EN 12317-2	> 200 N/50mm	> 22.840589 lb/in
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	6 months	-
Exposure to weather ⁽¹⁾	-	6 weeks	-
Water column	ISO 811	> 500 cm	> 197 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	260 / 200 N/50mm	30 / 23 lb/in
- elongation	EN 1297 / EN 12311-1	40 / 50 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F
Driving rain test	TU Berlin	passed	-

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

■ FIRE PROTECTION



FIRE SEALING page 122 -124



FIRE FOAM page 118



FIRE STRIPE page 130



FRONT BAND UV 210 page 98



MONOLITHIC FILM

The monolithic functional membrane guarantees breathability, thanks to a chemical reaction, rather than a micro perforation process as seen in microporous products. Therefore the continuous and homogeneous layer offers a complete barrier against the passage of water.

I TRASPIR 200



HIGHLY BREATHABLE MEMBRANE

















COMPOSITION

top layer non-woven PP fabric

middle layer PP breathable film

bottom layer non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	200 g/m ²	0.66 oz/ft ²
Thickness	EN 1849-2	0,8 mm	31 mil
Water vapour transmission (Sd)	EN 1931	0,02 m	174.825 US perm
Maximum tensile force MD/CD	EN 12311-1	360 / 270 N/50mm	41 / 31 lb/in
Elongation MD/CD	EN 12311-1	45 / 85 %	-
Resistance to nail tearing MD/CD	EN 12310-1	230 / 270 N	52 / 61 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,04 W/(m·K)	0.02 BTU/h·ft·°F
Specific heat	-	1568 J/(kg·K)	-
Density	-	approx. 250 kg/m ³	approx. 0.14 oz/in ³
Water vapour resistance factor (μ)	-	approx. 25	approx. 0.1 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	4 weeks	-
Water column	ISO 811	> 280 cm	> 110.236224 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	330 / 250 N/50mm	38 / 29 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 70 %	-
Flexibility at low temperatures	EN 1109	-20 °C	-4 °F
Driving rain test	TU Berlin	passed	-

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
T200	TRASPIR 200	-	1,5	50	75	5	164	807	25
TTT200	TRASPIR 200 TT	TT	1,5	50	75	5	164	807	25

I TRASPIR ALU 200



REFLECTIVE HIGHLY BREATHABLE MEMBRANE

















COMPOSITION

cladding
perforated aluminium film

reinforcing layer
PL reinforcing grid

top layer
non-woven PP fabric

middle layer
PL breathable film

bottom layer
non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	200 g/m ²	0.66 oz/ft ²
Thickness	EN 1849-2	0,8 mm	31 mil
Water vapour transmission (Sd)	EN 1931	0,045 m	77.7 US perm
Maximum tensile force MD/CD	EN 12311-1	350 / 225 N/50mm	40 / 26 lb/in
Elongation MD/CD	EN 12311-1	30 / 70 %	-
Resistance to nail tearing MD/CD	EN 12310-1	200 / 200 N	45 / 45 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 300 kg/m ³	approx. 0.17 oz/in ³
Water vapour resistance factor (μ)	-	approx. 60	approx. 0.22 MNs/g
VOC content	-	0 %	-
Reflectivity	EN 15976	95 %	-
Equivalent thermal resistance with 50mm air gap (ϵ_{other} surface 0,025-0,88)	ISO 6946	$R_{g,0,025}$: 0,821 (m ² K)/W $R_{g,0,88}$: 0,731 (m ² K)/W	4.66 h·ft²·°F/BTU 4.15 h·ft²·°F/BTU
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	4 weeks	-
Water column	ISO 811	> 300 cm	> 118 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	330 / 175 N/50mm	38 / 20 lb/in
- elongation	EN 1297 / EN 12311-1	25 / 50 %	-
Flexibility at low temperatures	EN 1109	-30 °C	-22 °F
Driving rain test	TU Berlin	passed	-

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	А	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TTTALU200	TRASPIR ALU 200 TT	TT	1,5	50	75	5	164	807	25

I TRASPIR EVO SEAL 200

HIGHLY BREATHABLE MONOLITHIC

MEMBRANE, PERFORATION-PROOF

























CERTIFIED

It has passed stringent tests to be classified as a screw, staple or nail puncture resistant membrane.

TIME AND COST SAVING

The oversized TPU film ensures that the membrane remains waterproof even in the event of a screw or nail puncture without the need for additional products. This means that installation is quick and time-saving.

AGEING RESISTANCE

The special functional film guarantees high durability and unaltered mechanical performance, ensuring protection and reliability.

COMPOSITION

top layer


non-woven PP fabric

middle layer

breathable monolithic PU film

bottom layer

non-woven PP fabric

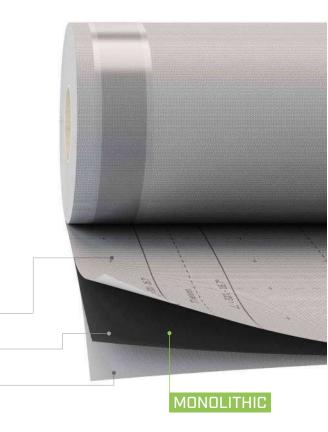

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
TEVO200	TRASPIR EVO SEAL 200	-	1,5	50	75	5	164	807	25
TTTEVO200	TRASPIR EVO SEAL 200 TT	TT	1,5	50	75	5	164	807	25



MONOLITHIC FILM TPU


The modified TPU film oversized in thickness compared to market standards resists drilling screws and nails and provides the superior performance of a monolithic product.

SECURE

Tested to fulfil the function of a temporary roof for up to 12 weeks with full exposure to weather.

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	200 g/m ²	0.66 oz/ft ²
Thickness	EN 1849-2	0,7 mm	28 mil
Water vapour transmission (Sd)	EN 1931	0,08 m	4.371 US perm
Maximum tensile force MD/CD	EN 12311-1	300 / 220 N/50mm	34 / 25 lb/in
Elongation MD/CD	EN 12311-1	50 / 70 %	-
Resistance to nail tearing MD/CD	EN 12310-1	260 / 340 N	58 / 76 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	0 m ³ /(m ² h50Pa)	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,04 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 285 kg/m ³	approx. 0.16 oz/in ³
Water vapour resistance factor (μ)	-	approx. 114	0.4 MNs/g
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	6 months	-
Exposure to weather ⁽¹⁾	-	12 weeks	-
Water column	ISO 811	600 cm	236 in
After ageing:			
- watertightness at 100°C	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	270 / 200 N/50mm	31 / 23 lb/in
- elongation	EN 1297 / EN 12311-1	25 / 35 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F
Driving rain test	TU Berlin	passed	-
Nail puncture test	ÖNORM B3647	passed	-

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

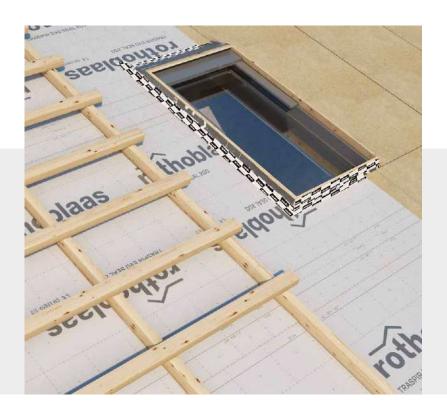

ABRASION RESISTANT AND DURABLE

The special compound guarantees high weather resistance and excellent durability in all weather conditions, also thanks to the special protective layer.


I VENTILATED FAÇADES AND FIRE

Fire safety issues affect all building types, as described in the introduction "Structures and fire behaviour" (p. 12). In order to minimise this type of risk, it is essential to rely on the right components and to carefully design them. Our ventilated façade solutions minimise risks by limiting the spread of flames in the event of an internal or external fire.

FIRE SPREAD PHASES IN A VENTILATED FAÇADE

1.

In the event of a fire starting inside the building, the flames initially spread to the room where they started. Modern buildings with ventilated façades are designed to take full advantage of the chimney effect of the ventilated façade, to reap the benefits of the upward movement of air in the gap between the cladding and the insulating layer. It is precisely this phenomenon that can give rise to problems in the event of a fire.

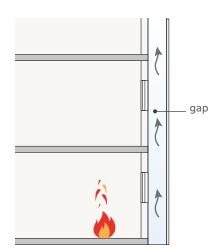


CHIMNEY EFFECT

The chimney effect is a physical phenomenon, at the basis of how traditional chimneys work, taken up by the world of architecture to ensure that, by exploiting the upward movement of hot air generated inside ventilated façades, a continuous cycle is created and the housing comfort of the building is increased.


2.

In the event of a fire, the chimney effect of the ventilated façade could cause problems as it could direct the flames into the ventilation space, pushing them towards the upper floors of the building.

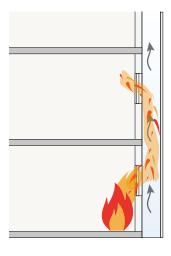

3.

Careful fire protection design includes active or passive protection devices within the design with the purpose to prevent the spread of any flames. Rothoblaas proposes the use of self-extinguishing membranes and tapes as a passive façade solution. If no preventive measures are taken, the combustion of materials could lead to flames on the upper floors. The same concepts also apply in the case of a fire developed outside the building.

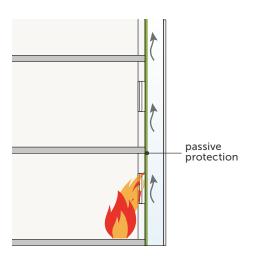

I TRASPIR FELT EVO UV 210



BREATHABLE MONOLITHIC MEMBRANE RESISTANT TO UV RAYS





















COMPOSITION

top layer breathable monolithic PU film

reinforcing layer PL fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	210 g/m ²	0.69 oz/ft ²
Thickness	EN 1849-2	1 mm	39 mil
Water vapour transmission (Sd)	EN 1931	0,1 m	34.965 US perm
Maximum tensile force MD/CD	EN 12311-1	380 / 420 N/50mm	43 / 48 lb/in
Elongation MD/CD	EN 12311-1	40 / 55 %	-
Resistance to nail tearing MD/CD	EN 12310-1	220 / 210 N	49 / 47 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class B-s1,d2	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,2 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	1300 J/(kg·K)	-
Density	-	approx. 210 kg/m ³	approx. 0.12 oz/in ³
Water vapour resistance factor (µ)	-	approx. 150	approx. 0,5 MNs/g
VOC content	-	0 %	-
UV resistance without final coating ⁽¹⁾	EN 13859-1/2	4 months	-
UV stability with joints up to 30 mm wide exposing no more than 30% of the surface ⁽²⁾	EN 13859-1/2	permanent	-
Weathering without final cladding (1)	-	10 weeks	-
Water column	ISO 811	> 300 cm	> 118.11024 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	340 / 380 N/50mm	39 / 43 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 50 %	-
Flexibility at low temperatures	EN 1109	-30 °C	-22 °F
Driving rain test	TU Berlin	passed	-

⁽¹⁾ Membrane subjected to artificial ageing test for 5000h (standard 336h). For correlation between laboratory tests and actual conditions, see page 199.

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TUV210	TRASPIR FELT UV 210	-	1,5	50	75	5	164	807	16
TUV21030	TRASPIR FELT UV 210 3,0 m	-	3	50	150	10	164	1615	16

⁽²⁾The membrane is not suitable for standing water for long periods.

I TRASPIR EVO UV 210

HIGHLY BREATHABLE MONOLITHIC

MEMBRANE RESISTANT TO UV RAYS





















MONOLITHIC

The monolithic structure of the membrane guarantees excellent durability over time, thanks to the special polymers used.

B-s1.d0

Flame retardant certification, Euroclass reaction to fire B-s1,d0 based on EN 13501-1.

PERMANENT UV STABILITY

Permanent resistance to UV rays with exposure with open joints up to 50 mm wide, and with up to 40% of the surface uncovered.




top layer monolithic breathable film

reinforcing layer PL fabric



CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	656
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TTTUV210	TRASPIR EVO UV 210 TT	TT	1,5	50	75	5	164	807	24

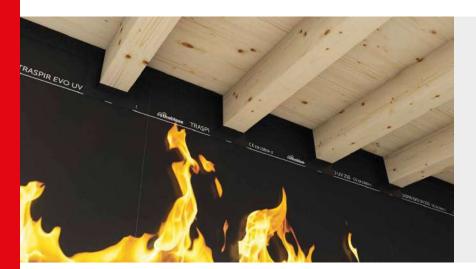

OPEN JOINTS FAÇADE

Discontinuous coating of ventilated façades can be created, with grouting up to 5 cm wide.

EASY INSTALLATION

The polyethylene reinforcing layer gives a solid structure to the membrane, avoiding swelling during installation, and making the placing easier.

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	210 g/m ²	0.69 oz/ft ²
Thickness	EN 1849-2	0,3 mm	12 mil
Water vapour transmission (Sd)	EN 1931	0,04 m	-
Water vapour transmission (dry cup)	ASTM E96/ E96M	41.7 US perm 2380 ng/(s·m²·Pa)	-
Maximum tensile force MD/CD	EN 12311-1	300 / 200 N/50mm	34 / 23 lb/in
Elongation MD/CD	EN 12311-1	25 / 25 %	-
Resistance to nail tearing MD/CD	EN 12310-1	120 / 120 N	27 / 27 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 120 °C	-4 / 248 °F
Reaction to fire	EN 13501-1	class B-s1,d0	-
Surface combustion characteristic	ASTM E84	class 1 or class A	-
Resistance to penetration of air	EN 12114	$< 0.03 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.002 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 600 kg/m ³	approx. 0.35 oz/in ³
Water vapour resistance factor (µ)	-	approx. 130	approx. 0.2 MNs/g
VOC content	-	0 %	-
UV resistance without final coating ⁽¹⁾	EN 13859-1/2	6 months	-
UV stability with joints up to 50 mm wide exposing no more than 40% of the surface ⁽²⁾	EN 13859-1/2	permanent	-
Weathering without final cladding (1)	-	12 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	290 / 190 N/50mm	33 / 22 lb/in
- elongation	EN 1297 / EN 12311-1	20 / 20 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F

⁽¹⁾ Membrane subjected to artificial ageing test for 5000h (standard 336h). For correlation between laboratory tests and actual conditions, see page 199.

■ FIRE PROTECTION



FIRE SEALING page 122 -124



FIRE FOAM page 118



FIRE STRIPE page 130



FRONT BAND UV 210 page 98



EXCELLENT AESTHETIC PERFORMANCE

Thanks to the mass per unit area and the polyacrylate mix, the product gurantees high thermal and dimensional stability, features that prevent swelling during installation. Finish appearance is guaranteed by the use of FRONT BAND UV 210, made with the same support, to blend in with the membrane.

⁽²⁾The membrane is not suitable for standing water for long periods.

RECOMMENDATIONS FOR INSTALLATION: TRASPIR UV

APPLICATION ON WALL - MEMBRANE WITH DOUBLE TAPE







APPLICATION ON WALL - MEMBRANE WITHOUT DOUBLE TAPE







■ RECOMMENDATIONS FOR INSTALLATION: TRASPIR UV

APPLICATION ON WINDOW - EXTERNAL SIDE

















- 1 HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES
- 2 MARLIN, CUTTER
- 6 FACADE BAND, FRONT BAND UV
- **7a** ALPHA
- 7a PLASTER BAND OUT

TRASPIR EVO 220

























MONOLITHIC

The monolithic structure of the membrane guarantees excellent durability over time, thanks to the special polymers used.

SUPER TAPE

Greater tape width to guarantee excellent resistance to heavy rain, approved by ÖNORM B 4119.

ANTISLIP

Rough surface for excellent sliding resistance thanks to the double polypropylene coating.



top layer


non-woven PP fabric

middle layer

breathable monolithic TPE film

bottom layer

non-woven PP fabric

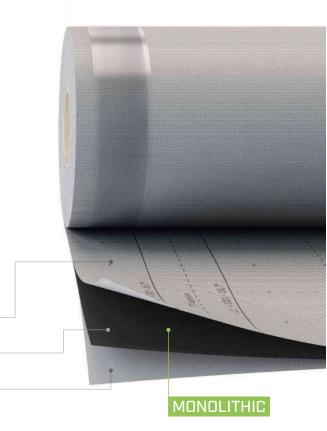

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
TEVO220	TRASPIR EVO 220	-	1,5	50	75	5	164	807	20
TTTEVO220	TRASPIR EVO 220 TT	TT	1,5	50	75	5	164	807	20



RELIABILITY

The wider width integrated double tape offers the highest possible protection against heavy rain.

SAFETY

During construction, the monolithic film of the membrane guarantees excellent durability, even when exposed to UV rays

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	220 g/m ²	0.72 oz/ft ²
Thickness	EN 1849-2	1 mm	39 mil
Water vapour transmission (Sd)	EN 1931	0,2 m	17.483 US perm
Maximum tensile force MD/CD	EN 12311-1	385 / 315 N/50mm	44 / 36 lb/in
Elongation MD/CD	EN 12311-1	65 / 80 %	-
Resistance to nail tearing MD/CD	EN 12310-1	345 / 425 N	78 / 96 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	0 m ³ /(m ² h50Pa)	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 220 kg/m ³	approx. 0.13 oz/in ³
Water vapour resistance factor (μ)	-	approx. 80	approx. 1 MNs/g
Joint strength	EN 12317-2	> 250 N/50mm	> 28.5 lb/in
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	4 months	-
Exposure to weather ⁽¹⁾	-	8 weeks	-
Water column	ISO 811	> 500 cm	> 197 in
After ageing:			
- watertightness at 100°C	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	365 / 270 N/50mm	42 / 31 lb/in
- elongation	EN 1297 / EN 12311-1	47 / 51 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F
Driving rain test	TU Berlin	passed	-

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.



HIGH MASS PER UNIT AREA

The performance and mass per unit area of this monolithic membrane allow it to meet even the most severe national standards - classified as one of the highest performing membranes.

I TRASPIR ADHESIVE 260

HIGHLY BREATHABLE SELF-ADHESIVE **MEMBRANE**

















SELF-ADHESIVE

Thanks to the new generation glue, the membrane ensures good adhesion even on rough OSB.

SECURE SEALING

The adhesive surface prevents the formation of airflow behind the membrane in case of accidental breakage or failure to seal.

BREATHABLE

Thanks to the patented glue, the membrane remains perfectly breathable even when fully bonded.

COMPOSITION

top layer

non-woven PP fabric

middle layer

PP breathable film

bottom layer

non-woven PP fabric


acrylate dispersion without solvents

release liner

removable plastic film

CODES AND DIMENSIONS

CODE	description	liner	Н	L	Α	Н	L	Α	
		[mm]	[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TA260	TRASPIR ADHESIVE 260	725 / 725	1,45	50	72,5	5	164	780	16
TAS260	TRASPIR ADHESIVE 260 STRIPE	180 / 180	0,36	50	18	1.18	164	194	-

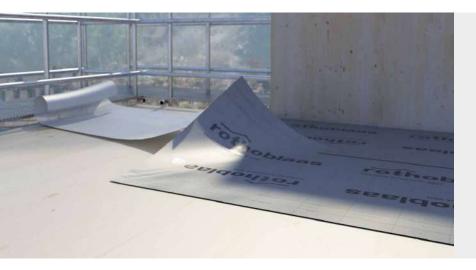

FAST INSTALLATION

The fully self-adhesive surface of the membrane allows fast and safe installation without compromising performance.

CONSTRUCTION SITE

During construction, it is essential to protect the structure, especially if it remains visible once the building is completed: TRASPIR ADHESIVE 260 offers excellent protection.

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	260 g/m ²	0.85 oz/ft ²
Thickness	EN 1849-2	approx. 0,6 mm	approx. 24 mil
Water vapour transmission (Sd)	EN 1931	0,22 m	-
Water vapour transmission (dry cup)	ASTM E96/ E96M	-	16.5 US perm
Maximum tensile force MD/CD	EN 12311-1	315 / 250 N/50mm	36 / 29 lb/in
Elongation MD/CD	EN 12311-1	61 / 66 %	-
Resistance to nail tearing MD/CD	EN 12310-1	255 / 260 N	57 / 58 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-30 / 80 °C	-22 / 176 °F
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	433 kg/m ³	approx. 0.25 oz/in ³
Water vapour resistance factor (μ)	-	approx. 366	approx. 1.1 MNs/g
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	4 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	295 / 225 N/50mm	34 / 26 lb/in
- elongation	EN 1297 / EN 12311-1	45 / 47 %	-
Adhesion strength on steel at 180°	EN 12316-2	12,5 N/cm	7.1 lb/in
180° adhesion force on proper support	EN 12316-2	8,5 N/cm	5 lb/in
Joint strength	EN 12317-2	132 N/50mm	15 lb/in
Solvents	-	no	-
Storage temperature	-	5 / 25 °C	41/77 °F
Application temperature	-	-5 / 35 °C	23 / 95 °F

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

Available in different configurations on request. It is possible to customise the mass per unit area of the membrane, the amount of acrylic glue, the size and the pre-cut of the liner.



SPECIAL GLUE

The acrylic dispersion glue has a specific formulation to ensure breathability and does not alter the functions of the functional film inside the membrane.

■ RECOMMENDATIONS FOR INSTALLATION

APPLICATION ON CEILING













SEALING FASTENING SYSTEMS






- 1 SPEEDY BAND 300, FLEXI BAND, PLASTER BAND
- PROTECT, BYTUM BAND PRIMER SPRAY, PRIMER

■ RECOMMENDATIONS FOR INSTALLATION

APPLICATION AT A HOLE



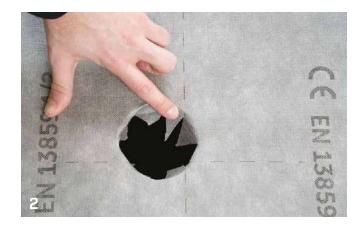

1 MARLIN, CUTTER

APPLICATION ON WALL













I TRASPIR DOUBLE NET 270



HIGHLY BREATHABLE MEMBRANE

















DOUBLE REINFORCEMENT GRIDS

Thanks to its composition, the membrane is not affected by mechanical stress or by staples and nails.

ANTISLIP


Rough surface for excellent sliding resistance thanks to the double polypropylene coating.

SAFETY

The high mass per unit offers good water resistance even during construction.

COMPOSITION

top layer non-woven PP fabric reinforcing layer reinforcing PP grid middle layer PP breathable film reinforcing layer reinforcing PP grid bottom layer non-woven PP fabric

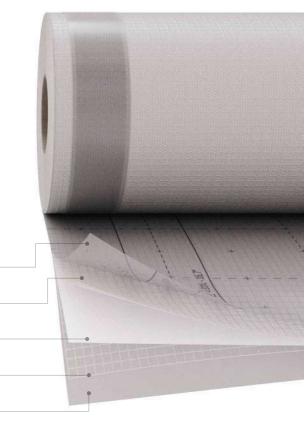

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
T270	TRASPIR DOUBLE NET 270	-	1,5	50	75	5	164	807	16
TTT270	TRASPIR DOUBLE NET 270 TT	TT	1,5	50	75	5	164	807	16



OUICK SEALING

The TT version offers fast installation and professional sealing thanks to the integrated double tape.

FLEXIBILITY

Although the membrane is very thick and resistant, its composition ensures great flexibility in processing without the risk of material wear.

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	270 g/m ²	0.88 oz/ft ²
Thickness	EN 1849-2	1 mm	39 mil
Water vapour transmission (Sd)	EN 1931	0,035 m	99.9 US perm
Maximum tensile force MD/CD	EN 12311-1	650 / 800 N/50mm	74 / 91 lb/in
Elongation MD/CD	EN 12311-1	40 / 60 %	-
Resistance to nail tearing MD/CD	EN 12310-1	750 / 550 N	169 / 124 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 260 kg/m ³	approx. 0.16 oz/in ³
Water vapour resistance factor (μ)	-	approx. 35	approx. 0.175 MNs/g
Joint strength	EN 12317-2	> 550 N/50mm	> 63 lb/in
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	4 weeks	-
Water column	ISO 811	> 500 cm	> 197 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	620 / 770 N/50mm	71 / 88 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 55 %	-
Flexibility at low temperatures	EN 1109	-20 °C	-4 °F
Driving rain test	TU Berlin	passed	-

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.



MECHANICAL STRENGTH

The double reinforcing grid ensures maximum safety even during construction and in the event of high mechanical stresses.

I TRASPIR EVO 300

HIGHLY BREATHABLE MONOLITHIC

























MONOLITHIC

MEMBRANE

The monolithic structure of the membrane guarantees excellent durability over time, thanks to the special polymers used.

9 MONTHS UV STABILITY

9 months resistance to UV rays with full exposure to radiation and no protection. Heat-resistant up to 120 °C.


EXCEPTIONAL TEMPERATURE RESISTANCE

It passed the artificial ageing test involving exposure to UV light for 5000 hours. Heat-resistant up to 120 °C.

COMPOSITION

top layer breathable monolithic acrylate film

middle layer PL fabric

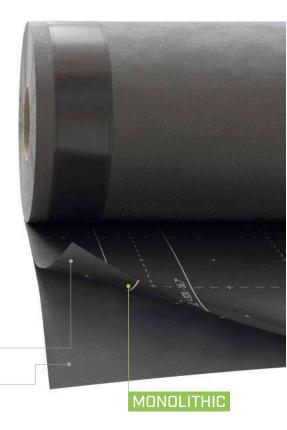

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
TEVO300	TRASPIR EVO 300	-	1,5	50	75	5	164	807	24
TTTEVO300	TRASPIR EVO 300 TT	TT	1,5	50	75	5	164	807	24



RELIABLE

Waterproofing and mechanical strength guaranteed even near areas permanently exposed to the sun.

SELF-EXTINGUISHING B-s1,d0

The special modified acrylic compound coupled with the polyester fabric makes the product self-extinguishing with fire reaction class B-s1,d0.

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	300 g/m ²	0.98 oz/ft ²
Thickness	EN 1849-2	0,5 mm	20 mil
Water vapour transmission (Sd)	EN 1931	0,04 m	87.413 US perm
Maximum tensile force MD/CD	EN 12311-1	380 / 250 N/50mm	43 / 29 lb/in
Elongation MD/CD	EN 12311-1	25 / 25 %	-
Resistance to nail tearing MD/CD	EN 12310-1	160 / 190 N	36 / 43 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 120 °C	-40 / 248 °F
Reaction to fire	EN 13501-1	class B-s1,d0	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0.17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 600 kg/m ³	approx. 0.35 oz/in ³
Water vapour resistance factor (µ)	-	approx. 80	approx. 0.2 MNs/g
Joint strength	EN 12317-2	> 280 N/50mm	> 32 lb/in
VOC content	-	0 %	-
UV resistance without final coating ⁽¹⁾	EN 13859-1/2	9 months	-
UV stability with joints up to 50 mm wide exposing no more than 40% of the surface ⁽²⁾	EN 13859-1/2	permanent	-
Weathering without final cladding (1)	-	16 weeks	-
Water column	ISO 811	> 500 cm	> 197 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	370 / 240 N/50mm	42 / 27 lb/in
- elongation	EN 1297 / EN 12311-1	23 / 23 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F
Driving rain test	TU Berlin	passed	-

⁽¹⁾ Membrane subjected to artificial ageing test for 5000h (standard 336h). For correlation between laboratory tests and actual conditions, see page 199.

■ FIRE PROTECTION



FIRE SEALING page 122 -124



FIRE FOAM page 118



FIRE STRIPE page 130



FRONT BAND UV 210 page 98



THERMAL STABILITY

The functional polyacrylate film offers thermal resistance up to +120°C.

This allows the product to also be used under solar and photovoltaic panels, or in areas where operating temperatures exceed the standards, without compromising performance.

⁽²⁾The membrane is not suitable for standing water for long periods.

I TRASPIR DOUBLE EVO 340







MONOLITHIC AND MICROPOROUS BREATHABLE MEMBRANE

















MONOLITHIC

The monolithic structure of the membrane guarantees excellent durability over time, thanks to the special polymers used.

LOW PITCHES

Thanks to its mass per unit area, it can also be effectively installed on roofs with pitches down to 5°.

DOUBLE PROTECTION

Double functional membrane for double watertightness and weather protection.

COMPOSITION

top layer

non-woven PP fabric

middle layer

breathable monolithic TPE film

middle layer

non-woven PP fabric

middle layer


non-woven PP fabric

middle layer

PP breathable film

bottom layer

non-woven PP fabric

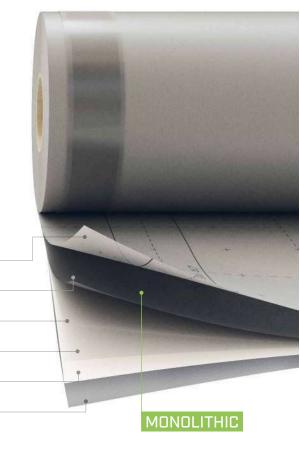

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
TEVO340	TRASPIR DOUBLE EVO 340	-	1,5	25	37,5	5	82	404	20
TTTEVO340	TRASPIR DOUBLE EVO 340 TT	TT	1,5	25	37,5	5	82	404	20



RELIABLE

High mass per unit area guarantees excellent protection even during construction.

SAFETY

The double protection provided by the two functional films ensures superior watertightness.

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	340 g/m ²	1.11 oz/ft ²
Thickness	EN 1849-2	1,2 mm	47 mil
Water vapour transmission (Sd)	EN 1931	0,19 m	18.403 US perm
Maximum tensile force MD/CD	EN 12311-1	605 / 455 N/50mm	69 / 52 lb/in
Elongation MD/CD	EN 12311-1	65 / 80 %	-
Resistance to nail tearing MD/CD	EN 12310-1	415 / 500 N	93 / 112 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,04 W/(m·K)	0.02 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 284 kg/m ³	approx. 0.16 oz/in ³
Water vapour resistance factor (μ)	-	approx. 160	approx. 0.95 MNs/g
Joint strength	EN 12317-2	> 250 N/50mm	> 28.5 lb/in
VOC content	-	0 %	-
UV stability ⁽¹⁾	EN 13859-1/2	4 months	-
Exposure to weather ⁽¹⁾	-	8 weeks	-
Water column	ISO 811	> 600 cm	> 236 in
After ageing:			
- watertightness at 100°C	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	550 / 400 N/50mm	63 / 46 lb/in
- elongation	EN 1297 / EN 12311-1	37 / 51 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

■ RELATED PRODUCTS










HIGH PERFORMANCE

The high mass per unit area and the double functional layer guarantee high protection and abrasion resistance. The monolithic membrane meets the most strict requirements of the various national regulations, classifying it as a very high performance product.


■ RECOMMENDATIONS FOR INSTALLATION: TRASPIR


APPLICATION ON ROOF - EXTERNAL SIDE



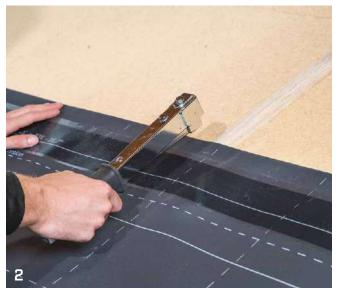



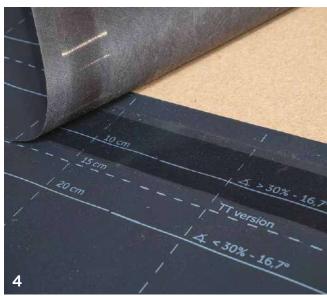







- TRASPIR 150, TRASPIR NET 160, TRASPIR EVO 160, TRASPIR 200, TRASPIR ALU 200, TRASPIR FELT UV 210, TRASPIR EVO 220, TRASPIR DOUBLE NET 270, TRASPIR EVO 300, TRASPIR DOUBLE EVO 340, TRASPIR ALU FIRE A2 430
- 2 HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES
- ${f 5b}$ RASY BAND, SPEEDY BAND ,FLEXI BAND, FLEXI BAND UV, SOLID BAND, PLASTER BAND ROLLER
- DOUBLE BAND, SUPRA BAND, BUTYL BAND 5c OUTSIDE GLUE

■ RECOMMENDATIONS FOR INSTALLATION: ROOF

TRANSVERSAL HEAD OVERLAPPING SEALING









4 EASY BAND, SPEEDY BAND, FLEXI BAND, FLEXI BAND UV, SOLID BAND, PLASTER BAND

SEALING FASTENING SYSTEMS





GEMINI





NAIL PLASTER, NAIL BAND

I TRASPIR WELD EVO 360

WELDABLE MONOLITHIC BREATHABLE

























MONOLITHIC

MEMBRANE

The monolithic structure of the membrane guarantees excellent durability over time, thanks to the special polymers used.

DOUBLE PROTECTION

Excellent watertightness; the double external PU layer ensures the highest safety levels.

LOW PITCHES

Thanks to its mass per unit area, the membrane can also be effectively installed on roofs with pitches down to 5°.


COMPOSITION

top layer breathable monolithic PU film

middle layer PL fabric


bottom layer

breathable monolithic PU film

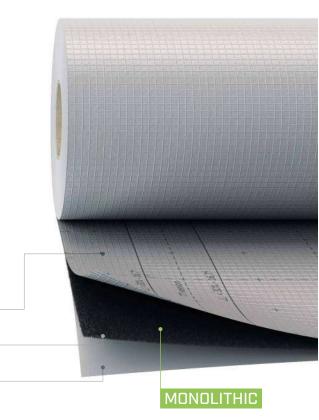

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	656
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TEVO360	TRASPIR WELD EVO 360	-	1,5	25	37,5	5	82	404	24
TEVO36030	TRASPIR WELD EVO 360 3,0 m	-	3	25	75	10	82	807	24

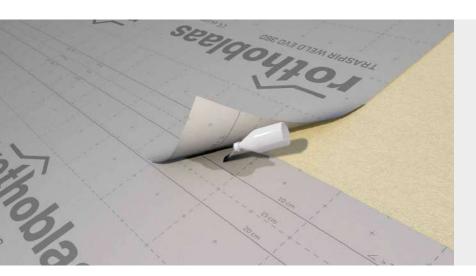

COMPLETE SYSTEM

Waterproofing with TRASPIR WELD EVO 360 means creating a safe, effective and complete system with sleeves and sealing of the battens by sealing.

FUNCTIONAL FILM SEALING

The membrane allows the two functional TPU films to be sealed together on the outer edges to prevent humidity absorption.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	360 g/m ²	1.18 oz/ft ²
Thickness	EN 1849-2	1 mm	39 mil
Water vapour transmission (Sd)	EN 1931	0,2 m	17.483 US perm
Maximum tensile force MD/CD	EN 12311-1	420 / 490 N/50mm	48 / 56 lb/in
Elongation MD/CD	EN 12311-1	50 / 65 %	-
Resistance to nail tearing MD/CD	EN 12310-1	310 / 280 N	70 / 63 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,4 W/(m·K)	0.23 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 360 kg/m ³	approx. 0.21 oz/in ³
Water vapour resistance factor (μ)	-	approx. 200	approx. 1 MNs/g
Joint strength	EN 12317-2	> 490 N/50mm	> 56 lb/in
UV stability $^{(1)}$	EN 13859-1/2	6 months	-
Exposure to weather ⁽¹⁾	-	12 weeks	-
Water column	ISO 811	> 300 cm	> 118 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	400 / 470 N/50mm	46 / 54 lb/in
- elongation	EN 1297 / EN 12311-1	50 / 65 %	-
Flexibility at low temperatures	EN 1109	-30 °C	-22 °F
Driving rain test	TU Berlin	passed	-
WELD LIQUID application temperature	-	10 / 25 °C	-
WELD LIQUID yield	-	approx. 150/180 m ² /	L -

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

■ RELATED PRODUCTS



WELDING BOTTLE BRUSH WELDBOTBRUSH content: 0,5 L pcs/pckg 1





WELDING BRUSH WELDBRUSH sizes: 4 cm pcs/pckg 1

MANICA FLEX - TPU MANFTPU300 MANFTPU430



WELDING LIQUID WELDLIQUID content: 1,0 L pcs/pckg 1



WELDING STRIPE WELDSTRIPE300 sizes: 0,30 x 20 m pcs/pckg 5



WELDING PIPE SLEEVE WELDPIPE diameter: 80 -125 mm pcs/pckg 4



HOT WELDING AND CHEMICAL WELDING

The double polyurethane membrane offers perfect welding on all overlapping and joints. With the possibility of both hot and chemical welding, the product makes it possible to create a single solid protective layer that is highly reliable, returning continuity to the various layers.

■ RECOMMENDATIONS FOR INSTALLATION

SEALING OF MEMBRANE










1 WELDBOTHBRUSH, WELDBRUSH, WELDLIQUID

SOLUTION A: SEALING BATTEN WITH WELD STRIPE



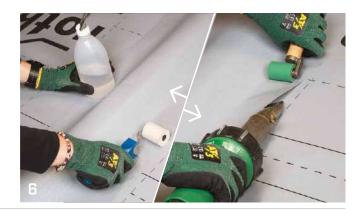

- **5** WELDSTRIPE300
- 6 WELDBOTHBRUSH, WELDBRUSH, WELDLIQUID


SOLUTION B: SEALING BATTEN WITH NAIL POINT TAPE






7 NAIL PLASTER

SLEEVE SEALING

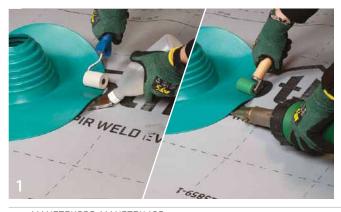


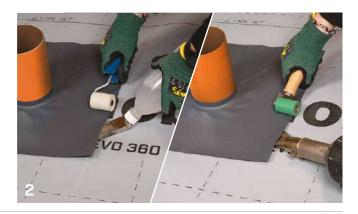

2 MANFTPU300, MANFTPU430 WELDBOTHBRUSH, WELDBRUSH, WELDLIQUID


CHIMNEY SEALING



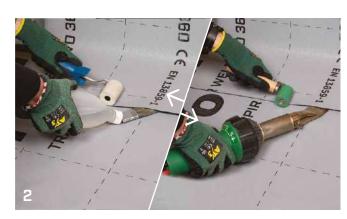





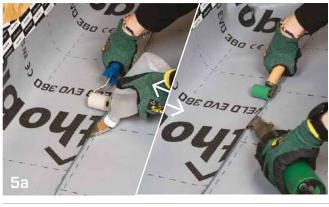

5b

- 2 WELDBOTHBRUSH, WELDBRUSH, WELDLIQUID
- 3 EASY BAND, SPEEDY BAND, FLEXI BAND, FLEXI BAND UV, SOLID BAND, PLASTER BAND
- **5a** WELDBOTHBRUSH, WELDBRUSH, WELDLIQUID
- **5b** EASY BAND, FLEXI BAND, FLEXI BAND UV, SOLID BAND, PLASTER BAND

TRASPIR ALU FIRE A2 430



REFLECTIVE HIGHLY BREATHABLE **MEMBRANE**



















NON-COMBUSTIBLE A2-s1,d0

Membrane tested according to EN 13501-1 and classified as non-combustible material.

REFLECTIVE

Thanks to its ability to reflect up to 95% of the heat, it improves the thermal performance of the construction panels.

HIGH MASS PER UNIT

With a value of 430 g/m², it is an extremely robust, thermally stable and stress-resistant product during installation.

COMPOSITION

protection layer perforated aluminium film

middle layer PE functional film

bottom layer fibreglass fabric



CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
TALUFIRE430	TRASPIR AUL FIRE A2 430	-	1,2	50	60	4	164	646	24



UV STABILITY

The special modified mix ensures high UV stability even if left exposed on site or if there are cracks or open joints in the claddings.

SAFETY

As it is a non-combustible membrane, it can also be applied in combination with photovoltaic systems or at electrical voltage points.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	430 g/m ²	1.41 oz/ft ²
Thickness	EN 1849-2	0,43 mm	17 mil
Water vapour transmission (Sd)	EN 1931	0,08 m	43.706 US perm
Maximum tensile force MD/CD	EN 12311-1	3000 / 3200 N/50mm	343 / 365 lb/in
Elongation MD/CD	EN 12311-1	6 / 5 %	-
Resistance to nail tearing MD/CD	EN 12310-1	580 / 450 N	130 / 101 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class A2-s1,d0	-
Resistance to penetration of air	EN 12114	$> 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	> 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,0007 W/(m·K)	0 BTU/h·ft·°F
Specific heat	-	800 J/(kg·K)	-
Density	-	1000 kg/m^3	approx. 0.58 oz/in ³
Water vapour resistance factor (µ)	-	approx. 185	approx. 0.4 MNs/g
VOC content	-	0 %	-
Reflectivity	EN 15976	95 %	-
Equivalent thermal resistance with 50mm air gap $(\epsilon_{other\ surface}\ 0.025-0.88)$	ISO 6946	$R_{g,0,025}$: 0,821 (m ² K)/W $R_{g,0,88}$: 0,731 (m ² K)/W	
UV resistance without final coating ⁽¹⁾	EN 13859-1/2	9 months	-
UV stability with joints up to 60 mm wide exposing no more than 60 % of the surface	EN 13859-1/2	permanent	-
Weathering without final cladding (1)	-	16 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	3000 / 3200 N/50mm	343 / 365 lb/in
- elongation	EN 1297 / EN 12311-1	6 / 5 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

■ FIRE PROTECTION



FIRE SEALING page 122 -124



FIRE FOAM page 118



FIRE STRIPE page 130



FRONT BAND UV 210 page 98



MECHANICAL STRENGTH

The combination of aluminium cladding and glass fibre reinforcement ensures high mechanical performance.

I TRASPIR METAL

3D MATS FOR METAL ROOFS

ISTITUTO GIORDANO



















CERTIFIED NOISE REDUCTION


The 3D mats guarantee reduction of airborne and heavy rain noises. Values tested and certified.

PROTECTIVE FELT

The breathable membrane with 3D grid includes a fifth layer that blocks impurities and improves ventilation.

HIGH DENSITY 3D GRID

The 3D mat has high mechanical strength and is also appropriate for aluminium sheet metal.

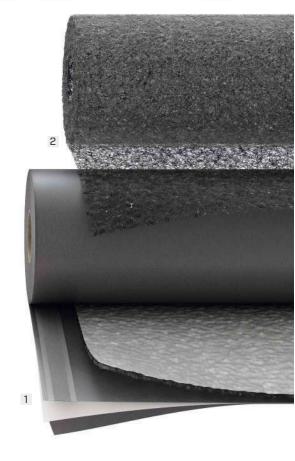

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	656
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
1 TTTMET610	TRASPIR 3D COAT TT	TT	1,35	33	44,55	4.43	108.27	479.54	4
2 NET350	NET 350	-	1,25	50	62,5	4.11	164	672.75	4



SAFE VENTILATION

The breathable membrane TRASPIR 3D COAT comes with a 3D grid and a protective felt on the surface, that prevents the entry of impurities and improves ventilation.

VERSATILE

Also ideal in combination with BYTUM or TRASPIR to create a micro-ventilation layer in both wall and roof installations.

■ RECOMMENDATIONS FOR INSTALLATION

TRASPIR 3D COAT





HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES

3D NET





CHIMNEY DETAIL WITH TRASPIR 3D COAT









- MARLIN, CUTTER
- TRASPIR NET 160, TRASPIR EVO 160, TRASPIR 200, TRASPIR EVO SEAL 200, TRASPIR EVO 220, TRASPIR ADHESIVE 260, TRASPIR DOUBLE NET 260, TRASPIR EVO 300, TRASPIR DOUBLE EVO 340
- 3
- 4 EASY BAND, FLEXI BAND, FLEXI BAND UV, FACADE BAND, PLASTER BAND

TRASPIR 3D COAT TT

COMPOSITION

protection layer non-woven PP fabric

middle layer

3-dimensional PP mat

protection layer

non-woven PP fabric

middle layer

PP breathable film

bottom layer

non-woven PP fabric



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	610 g/m ²	1.2 oz/ft ²
Thickness	EN 1849-2	8 mm	315 mil
Water vapour transmission (Sd)	EN 1931	0,02 m	174.825 US perm
Maximum tensile force MD/CD	EN 12311-1	325 / 225 N/50mm	37 / 26 lb/in
Elongation MD/CD	EN 12311-1	45 / 70 %	-
Resistance to nail tearing MD/CD	EN 12310-1	185 / 195 N	42 / 44 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-30 / 80 °C	-22 / 176 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$< 0.02 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	< 0.001 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,3 W/(m·K)	0,17 BTU/h·ft·°F
Specific heat	-	1800 J/(kg·K)	-
Density	-	approx. 65 kg/m ³	approx. 0.04 oz/in ³
Water vapour resistance factor (µ)	-	approx. 33	approx. 0.1 MNs/g
VOC content	-	< 0,02 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	2 weeks	-
Water column	ISO 811	> 250 cm	> 98.4252 in
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	285 / 195 N/50mm	33 / 22 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 30 %	-
Flexibility at low temperatures	EN 1109	-30 °C	-22 °F
Void ratio	-	95 %	-
Variation of the sound reduction index ΔR_{w}	ISO 10140-2 / ISO 717-1	1 dB	-
Variation in overall A-weighted sound intensity level from heavy rain noise $\Delta L_{i\text{A}}$	ISO 140-18	approx. 4 dB	-
Impact sound attenuation index ΔL_w	ISO 140-8	28 dB	-

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

3D NET




COMPOSITION

3D grid 3-dimensional PP mat

■ TECHNICAL DATA

Properties	standard		
Mass per unit area	EN 1849-2	350 g/m ²	1.15 oz/ft ²
Thickness	EN 1849-2	7.5 mm	295 mil
Maximum tensile force MD/CD NET	EN 12311-1	1,3 / 0,5 N/50mm	0.15 / 0.06 lb/in
Elongation MD/CD NET	EN 12311-1	95 / 65 %	-
Temperature resistance	-	-40 / 80 °C	-40 / 176 °F
Reaction to fire	EN 13501-1	class F	-
Density	-	approx. 35 kg/m ³	approx. 0.02 oz/in ³
VOC emissions	-	< 0,02 %	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	4 weeks	-
Void ratio	-	95 %	-
Variation of the sound reduction index ΔR_{w}	ISO 10140-2 / ISO 717-1	1 dB	-
Variation in overall A-weighted sound intensity level from heavy rain noise $\Delta L_{i\text{A}}$	ISO 140-18	4 dB	-
Impact sound attenuation index $\Delta L_{\rm w}$	ISO 140-8	28 dB	-

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

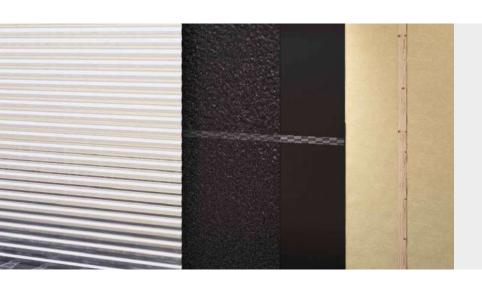

DURABILITY

When installed on a continuous support, it promotes micro-ventilation of metal roofs, preventing corrosion.

LABORATORY MEASUREMENTS



AIRBORNE ACOUSTIC INSULATION AND NOISE GENERATED BY HEAVY RAIN

The test sample is identified by a 5,60 x 3,65 m timber roof positioned between an emitting room (PHOTO 1) and a receiving room, able to emit and record the sound stress applied during the tests.

Shown below are the layers tested in the two versions: the first with the TRASPIR METAL and the second with the sheet metal directly on the plank.

- 1 0,6 mm thick zinc plated steel metal sheet
- 2 8 mm thick TRASPIR METAL membrane
- 3 20 mm thick pine beads
- 4 60 mm thick pine battens
- 5 Rothoblaas breathable membrane
- 6 22 mm thick 200 kg/m³ timber fibre
- 7 180 mm thick 110 kg/m³ timber fibre
- B Rothoblaas vapour control layer
- 9 20 mm thick pine beads
- 10 200 mm thick laminated pine beam



TESTS PERFORMED

The following measuring tests have been performed on both layers, with and without TRASPIR METAL:

- 1. Airborne acoustic insulation according to EN ISO 10140-2:2010 and EN ISO 717-1:2013 on roof. The result is a soundproofing power index of $R_{\rm W}$ for the layer. Accordingly, the higher the value the better the acoustic insulation.
- 2. Noise generated by heavy rain according to EN ISO 140-18:2007: in this test you obtain a value indicating the sound pressure level L_{IA} recorded in the receiving room during the pounding of water, simulated by a tank placed over the sample.

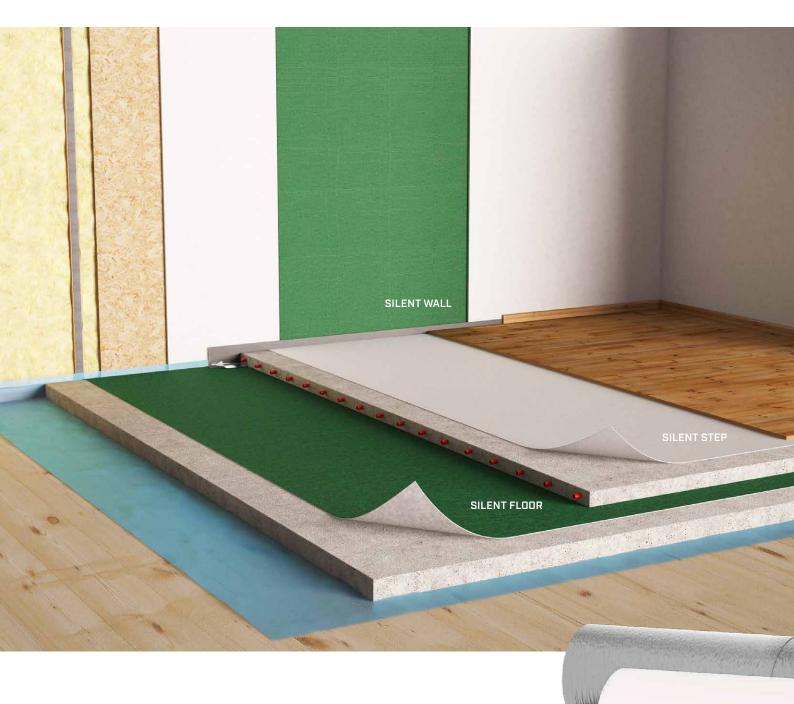


PHOTO 1: Photo of sample, emitting room side

	RES	SULTS		WITHOUT MEM	WITH MEMBRANE		
1.	×	AIRBORNE NOISE	2//	Increase of sound insulation by 1 dB R _W = 43 dB			
2.	Ť	HEAVY RAIN	***//	L _{IA} = 36,9 dB	Reduction of noise from rain up to 4.2 dB	111 Mg	

NOTE: The full test report is available from the Rothoblaas technical department.

SILENT, IN NAME AND IN FACT



In our "Acoustic Solutions" catalogue you can find all our soundproofing membranes: from the SILENT FLOOR underscreed range to the SILENT STEP underfloor solutions and the SILENT WALL family for wall noise reduction. Discover how good life is at home with the right acoustic comfort!

Scan the QR code and download our "Acoustic Solutions" catalogue.







SILENT

STEP

BITUMINOUS

I BITUMINOUS

BYTUM 400 BITUMINOUS UNDERLAY CONTROL LAYER
BITUMINOUS UNDERLAY CONTROL LAYER
BYTUM 750 BITUMINOUS UNDERLAY CONTROL LAYER
BYTUM 1100 BITUMINOUS UNDERLAY CONTROL LAYER
BYTUM 1500 BITUMINOUS UNDERLAY CONTROL LAYER
BYTUM 2000 BITUMINOUS UNDERLAY CONTROL LAYER
BYTUM BASE 2500 SELF-ADHESIVE BITUMINOUS MEMBRANE
BYTUM SLATE 3500 SELF-ADHESIVE SLATED BITUMINOUS MEMBRANE
SHINGLE BITUMINOUS TILE

BYTUM 400



BITUMINOUS UNDERLAY CONTROL LAYER



















COMPOSITION





■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-1	400 g/m ²	1.31 oz/ft ²
Thickness	EN 1849-2	0,6 mm	24 mil
Water vapour transmission (Sd)	EN 1931	22 m	0.159 US perm
Maximum tensile force MD/CD	EN 12311-1	500 / 400 N/50mm	57 / 46 lb/in
Elongation MD/CD	EN 12311-1	45 / 50 %	-
Resistance to nail tearing MD/CD	EN 12310-1	200 / 200 N	45 / 45 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,2 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	120 J/(kg·K)	-
Density	-	approx. 600 kg/m ³	approx. 0.35 oz/in ³
Water vapour resistance factor (μ)	-	approx. 36000	approx. 110 MNs/g
UV stability ⁽¹⁾	EN 13859-1/2	4 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	450 / 350 N/50mm	51 / 40 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 40 %	-
Flexibility at low temperatures	EN 1109	-40 °C	-40 °F

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

Store the product in a dry, covered location. The rolls must be transported and stored in a vertical position.

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
BYT400	BYTUM 400	-	1	50	50	3.3	164	538	20

I BYTUM 750



BITUMINOUS UNDERLAY CONTROL LAYER




















COMPOSITION



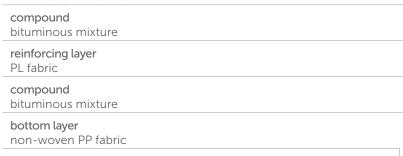



■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-2	750 g/m ²	2.46 oz/ft ²
Thickness	EN 1849-2	0,8 mm	31 mil
Water vapour transmission (Sd)	EN 1931	38 m	0.092 US perm
Maximum tensile force MD/CD	EN 12311-1	500 / 400 N/50mm	57 / 46 lb/in
Elongation MD/CD	EN 12311-1	45 / 50 %	-
Resistance to nail tearing MD/CD	EN 12310-1	200 / 200 N	45 / 45 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,2 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	120 J/(kg·K)	-
Density	-	approx. 935 kg/m ³	approx. 0.35 oz/in ³
Water vapour resistance factor (µ)	-	approx. 47500	approx. 190 MNs/g
UV stability ⁽¹⁾	EN 13859-1/2	4 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	450 / 350 N/50mm	51 / 40 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 40 %	-
Flexibility at low temperatures	EN 1109	-45 °C	-49 °F

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

Store the product in a dry, covered location. The rolls must be transported and stored in a vertical position.

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
BYTTT750	BYTUM 750 TT	TT	1	40	40	3.3	131	431	20

BYTUM 1100



BITUMINOUS UNDERLAY CONTROL LAYER



















COMPOSITION





■ TECHNICAL DATA

Properties	standard	value	USC conversion
·			
Mass per unit area	EN 1849-2	1100 g/m ²	3.6 oz/ft ²
Thickness	EN 1849-2	1,1 mm	43 mil
Water vapour transmission (Sd)	EN 1931	55 m	0.064 US perm
Maximum tensile force MD/CD	EN 12311-1	650 / 500 N/50mm	74 / 57 lb/in
Elongation MD/CD	EN 12311-1	45 / 50 %	-
Resistance to nail tearing MD/CD	EN 12310-1	230 / 230 N	52 / 52 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,2 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	120 J/(kg·K)	-
Density	-	approx. 1000 kg/m ³	approx. 0.58 oz/in ³
Water vapour resistance factor (μ)	-	approx. 50000	approx. 275 MNs/g
UV stability ⁽¹⁾	EN 13859-1/2	4 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	600 / 450 N/50mm	69 / 51 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 40 %	-
Flexibility at low temperatures	EN 1109	-45 °C	-49 °F

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

Store the product in a dry, covered location. The rolls must be transported and stored in a vertical position.

CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
BYT1100	BYTUM 1100	-	1	25	25	3.3	82	270	24

I BYTUM 1500



BITUMINOUS UNDERLAY CONTROL LAYER



















COMPOSITION





■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-1	1500 g/m ²	4.92 oz/ft ²
Thickness	EN 1849-2	1,3 mm	51 mil
Water vapour transmission (Sd)	EN 1931	120 m	0.029 US perm
Maximum tensile force MD/CD	EN 12311-1	600 / 400 N/50mm	69 / 46 lb/in
Elongation MD/CD	EN 12311-1	40 / 40 %	-
Resistance to nail tearing MD/CD	EN 12310-1	220 / 230 N	49 / 52 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,2 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	175 J/(kg·K)	-
Density	-	approx. 1150 kg/m ³	approx. 0.66 oz/in ³
Water vapour resistance factor (μ)	-	approx. 20000	approx. 600 MNs/g
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	500 / 300 N/50mm	57 / 34 lb/in
- elongation	EN 1297 / EN 12311-1	40 / 40 %	-
Flexibility at low temperatures	EN 1109	-20 °C	-4 °F

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

Store the product in a dry, covered location. The rolls must be transported and stored in a vertical position.

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
BYT1500	BYTUM 1500	-	1	25	25	3.3	82	270	30
BYTTT1500	BYTUM 1500 TT	TT	1	25	25	3.3	82	270	30

I BYTUM 2000



BITUMINOUS UNDERLAY CONTROL LAYER



















COMPOSITION





■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-1	2000 g/m ²	6.55 oz/ft ²
Thickness	EN 1849-2	1,8 mm	71 mil
Water vapour transmission (Sd)	EN 1931	120 m	0.029 US perm
Maximum tensile force MD/CD	EN 12311-1	600 / 400 N/50mm	69 / 46 lb/in
Elongation MD/CD	EN 12311-1	40 / 40 %	-
Resistance to nail tearing MD/CD	EN 12310-1	220 / 230 N	49 / 52 lbf
Watertightness	EN 1928	class W1	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class E	-
Resistance to penetration of air	EN 12114	$0 \text{ m}^3/(\text{m}^2\text{h}50\text{Pa})$	0 cfm/ft ² at 50Pa
Thermal conductivity (λ)	-	0,2 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	175 J/(kg·K)	-
Density	-	approx. 1100 kg/m ³	approx. 0.64 oz/in ³
Water vapour resistance factor (µ)	-	approx. 20000	approx. 600 MNs/g
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	500 / 300 N/50mm	57 / 34 lb/in
- elongation	EN 1297 / EN 12311-1	40 / 40 %	
Flexibility at low temperatures	EN 1109	-20 °C	-4 °F

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

Store the product in a dry, covered location. The rolls must be transported and stored in a vertical position.

■ CODES AND DIMENSIONS

CODE	description	tape	Н	L	Α	Н	L	Α	
			[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
BYT2000	BYTUM 2000	-	1	15	15	3.3	50	161	33

■ RECOMMENDATIONS FOR INSTALLATION: BYTUM


APPLICATION ON ROOF - EXTERNAL SIDE









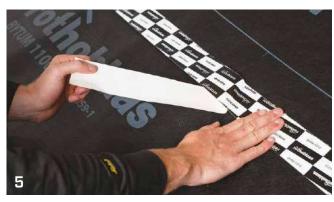



- **1** BYTUM400, BYT750, BYT110, BYT1500, BYT2000
- 2 HAMMER STAPLER 47, HAMMER STAPLER 22, HAND STAPLER, STAPLES
- **5** EASY BAND, SPEEDY BAND, FLEXI BAND, FLEXI BAND UV, SOLID BAND, PLASTER BAND
- 6 ROLLER

BYTUM BASE 2500



SELF-ADHESIVE BITUMINOUS MEMBRANE



















FLAT ROOF

Ideal for flat roofs as a final visible layer in combination with BYTUM SLATE 3500.

WORKABILITY

Flexibility and workability are guaranteed even at low temperatures thanks to the polymer-modified bituminous compound.

SELF-ADHESIVE AND SELF-SEALING

The adhesive compound and polyester surface finish allow the membrane to be self-sealed quickly and conveniently.

COMPOSITION

top layer

PL film

compound

elastoplastic polymeric distilled bitumen

reinforcing layer

PL stabilised with fibreglass

compound

elastoplastic polymeric distilled bitumen

bottom layer


distilled bitumen modified with self-adhesive polymer

release liner

removable plastic film

CODES AND DIMENSIONS

CODE	description	liner	Н	L	Α	Н	L	Α	
		[mm]	[m]	[m]	$[m^2]$	[ft]	[ft]	[ft ²]	
BYTBASE2500	BYTUM BASE 2500	500 / 500	1	10	10	3.3	33	108	29

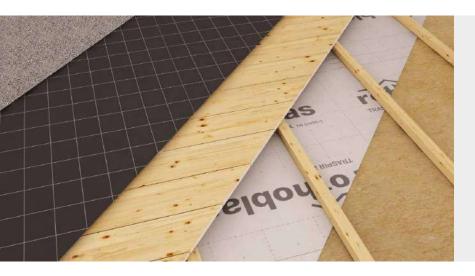

WITHOUT FLAME

Thanks to the modified self-adhesive bitumen compound, the product can be installed without the use of naked flames or heat.

EASY INSTALLATION

Pre-cut removable monosilicone films and a precise alignment of the liners make the work safe, pleasant and aesthetically perfect.

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-1	approx. 2550 g/m ²	approx. 8.36 oz/ft²
Thickness	EN 1849-1	2 mm	79 mil
Water vapour transmission (Sd)	EN 1931	approx. 200 m	approx. 0.017 US perm
Maximum tensile force MD/CD	EN 12311-1	400 / 300 N/50mm	46 / 34 lb/in
Elongation MD/CD	EN 12311-1	35 / 35 %	-
Resistance to nail tearing MD/CD	EN 12310-1	120 / 120 N	27 / 27 lbf
Watertightness	EN 1928	60 kPa	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class E	-
Thermal conductivity (λ)	-	0,17 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	170 J/(kg·K)	-
Density	-	approx. 1250 kg/m ³	approx. 0.72 oz/in ³
Water vapour resistance factor (μ)	-	approx. 100000	approx. 1000 MNs/g
Joint strength	EN 12317-2	300 / 200 N/50mm	34 / 23 lb/in
Joint detachment resistance	EN 12316-1	-	-
UV stability ⁽¹⁾	EN 13859-1/2	3 months	-
Exposure to weather ⁽¹⁾	-	3 weeks	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	300 / 200 N/50mm	34 / 23 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 35 %	-
Flexibility at low temperatures	EN 1109	-20 °C	-4 °F
Hot sliding	EN 1110	100 °C	212 °F
Application temperature	-	10 / 30 °C	50 / 86 °F
Adhesion strength on proper support at 180°	EN 12316-1	50 N	11.24 lbf
Adhesion strength on steel	ASTM D 1000	50 N/50mm	6 lb/in

 $^{^{(1)}}$ For the correlation between laboratory tests and actual conditions, see page 199.

Store the product in a dry, covered location. The rolls must be transported and stored in a vertical position.

It is recommended to store the product at room temperature until application, as it is sensitive to temperature changes. We recommend applying it during the cooler hours in summer and the warmer hours in winter, possibly with the help of a hot air gun.

RELATED PRODUCTS



BYTUM LIQUID page 42




BYTUM SPRAY page 46



GROUND BAND page 34



BLACK BAND page 136

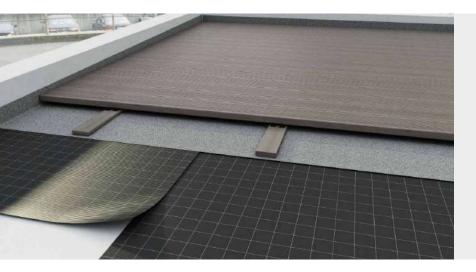

LOW PITCHES

Used on slopes of up to 5° as an under-tile, it guarantees excellent waterproofing even in the event of punching.

BYTUM SLATE 3500























EASY INSTALLATION

The slate finish makes BYTUM SLATE 3500 usable on slopes up to 5° as an under-tile and compatible with mortar and foam.

WIDE RANGE

Available in 4 colours to meet different application areas and aesthetic requirements.

FLEXIBILITY

Flexibility and workability are guaranteed even at low temperatures thanks to the polymer-modified bituminous compound.



CODES AND DIMENSIONS

CODE	description	liner	colour	Н	L	Α	Н	L	А	
		[mm]		[m]	[m]	[m ²]	[ft]	[ft]	[ft ²]	
BYTSWHI3500	BYTUM SLATE 3500 WHITE	500 / 500	white	1	10	10	3.29	33	107.64	20
BYTSGRE3500	BYTUM SLATE 3500 GREEN	500 / 500	green	1	10	10	3.29	33	107.64	20
BYTSRED3500	BYTUM SLATE 3500 RED	500 / 500	red	1	10	10	3.29	33	107.64	20
BYTSGRA3500	BYTUM SLATE 3500 GRAY	500 / 500	grey	1	10	10	3.29	33	107.64	20



SELF-ADHESIVE AND SELF-SEALING

The lateral adhesive strip guarantees waterproofing even at the points where membranes overlap.

FLAT ROOF

Ideal for creating a flat roof as a final visible layer in combination with BYTUM BASE 2500.

COMPOSITION

top layer

slate chips

compound

elastoplastic polymeric distilled bitumen

reinforcing layer

PL stabilised with fibreglass

compound


elastoplastic polymeric distilled bitumen

bottom layer

distilled bitumen modified with self-adhesive polymer

release liner

removable plastic film

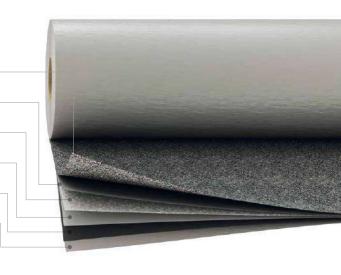

■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area	EN 1849-1	3500 g/m ²	11.47 oz/ft ²
Thickness	EN 1849-1	ca. 2.8 mm	approx. 110 mil
Water vapour transmission (Sd)	EN 1931	280 m	0.012 US perm
Maximum tensile force MD/CD	EN 12311-1	400 / 300 N/50mm	46 / 34 lb/in
Elongation MD/CD	EN 12311-1	35 / 35 %	-
Resistance to nail tearing MD/CD	EN 12310-1	120 / 120 N	27 / 27 lbf
Watertightness	EN 1928	60 kPa	-
Temperature resistance	-	-40 / 100 °C	-40 / 212 °F
Reaction to fire	EN 13501-1	class E	-
Thermal conductivity (λ)	-	0,17 W/(m·K)	0.12 BTU/h·ft·°F
Specific heat	-	170 J/(kg·K)	
Density	-	approx. 1250 kg/m ³	approx. 0.72 oz/in3
Water vapour resistance factor (μ)	-	approx. 100000	approx. 1400 MNs/g
Joint strength	EN 12317-2	300 / 200 N/50mm	34 / 23 lb/in
UV stability ⁽¹⁾	EN 13859-1/2	permanent	-
After ageing:			
- watertightness	EN 1297 / EN 1928	class W1	-
- maximum tensile force MD/CD	EN 1297 / EN 12311-1	300 / 200 N/50mm	34 / 23 lb/in
- elongation	EN 1297 / EN 12311-1	35 / 35 %	-
Flexibility at low temperatures	EN 1109	-15 °C	5 °F
Hot sliding	EN 1110	100 °C	212 °F
Application temperature	-	10 °C	50 °F
Adhesion strength on selvedge at 180°	EN 12316-1	50 N	11.240451 lbf
Adhesion strength on steel	ASTM D 1000	50 N/50mm	6 lb/in

⁽¹⁾ For the correlation between laboratory tests and actual conditions, see page 199.

Store the product in a dry, covered location. The rolls must be transported and stored in a vertical position.

It is recommended to store the product at room temperature until application, as it is sensitive to temperature changes. We recommend applying it during the cooler hours in summer and the warmer hours in winter, possibly with the help of a hot air gun.



PERMANENT UV STABILITY

The exposed slated top layer provides long-lasting weather resistance by protecting the bitumen waterproofing layer.

■ RECOMMENDATIONS FOR INSTALLATION


BYTUM SLATE 3500










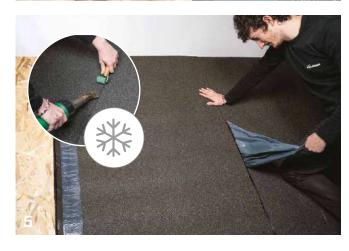



BYTUM BASE 2500 | BYTUM SLATE 3500



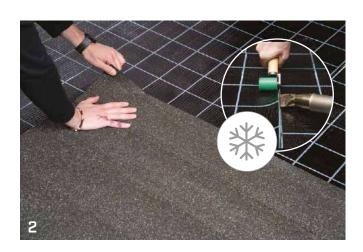

I RECOMMENDATIONS FOR INSTALLATION

INTERNAL CORNER









- 3 MARLIN, CUTTER
- 4 ROLLER

EXTERNAL CORNER









SHINGLE

BITUMINOUS TILE







Final waterproof covering layer CE marked according to ETA. Weatherproof and acoustically insulated against heavy rain.

PERMANENT UV STABILITY


Unlimited UV resistance thanks to the basalt grit top layer.

SELF-SEALING

Easy to install thanks to pre-installed thermo-adhesive dots that ensure sealing during installation.









CODES AND DIMENSIONS

CODE		В	L	В	L	colour	A/co.	co. / b	A / b	
		[mm]	[mm]	[in]	[in]		[m ²]		[m ²]	
SHIREDR	R	777	336	30.6	13.23	red	2,0	39	66,0	18
SHIBROR	R	777	336	30.6	13.23	brown	2,0	39	66,0	18
SHIGRER	R	777	336	30.6	13.23	green	2,0	39	66,0	18
SHIBLAR	R	777	336	30.6	13.23	black	2,0	39	66,0	18
SHIREDB	В	808	336	31.82	13.23	red	2,0	39	66,0	18
SHIBROB	В	808	336	31.82	13.23	brown	2,0	39	66,0	18
SHIGREB	В	808	336	31.82	13.23	green	2,0	39	66,0	18
SHIBLAB	В	808	336	31.82	13.23	black	2,0	39	66,0	18

B tile width

 ${\bf L}\,$ tile height

A / co. area of tiles per package A / b area of tiles per pallet

co./b packages per pallet

R rectangular

B biber



TRANSPORTATION

Easy to transport thanks to the small size of the package (80 cm x 34 cm) and the low weight of the package (approx. 20 kg).

BYTUM 400


Ideal in combination with a bituminous under-tile shield (BYTUM 400) for effective waterproofing even on low roof slopes.


■ TECHNICAL DATA

Properties	standard	value	USC conversion
Mass per unit area (RECTANGULAR)	ETA 07/0266	9,6 kg/m ²	0.03 oz/ft ²
Mass per unit area (BIBER)	ETA 07/0266	9 kg/m ²	0.029 oz/ft ²
Thickness	-	3 mm	118 mil
Maximum tensile force MD/CD	EN 544	> 600 / 400 N/50mm	> 69 / 46 lb/in
Elongation MD/CD	EN 544	3,5 / 3,5 %	
Resistance to nail tearing MD/CD	EN 544	> 100 N	> 22 lbf
Water impermeability (bitumen mass)	ETA-07/0266	896 g/m ²	2.936242 oz/ft ²
Temperature resistance		-20 / 80 °C	-4 / 176 °F
Reaction to fire	EN 13501-1	class E	
External fire performance	EN 13501-5	BROOF class (t1)	
After artificial ageing			
- maximum tensile force MD/CD	EN 544	> 600 / 400 N/50mm	69 / 46 lb/in
- resistance to nail tearing MD/CD	EN 544	> 100 N	22 lbf
- hot slipping	EN 544	< 2 mm	< 0.07874 in
- grit adhesion	EN 544	< 2,5 g	< 0.088185 oz
Flexibility at low temperatures	EN 1109	-20 °C	-4 °F
Bitumen density	ETA-07/0266	1,2 kg/L	
Application temperature	ETA-07/0266	0 / 40 °C	32 / 104 °F
Water absorption	EN 544	2 %	
UV stability	-	permanent	-

It is recommended to store the product at room temperature until application, as it is sensitive to temperature changes. We recommend applying it during the cooler hours in summer and the warmer hours in winter, possibly with the help of a hot air gun.

GEOMETRY





■ RELATED PRODUCTS

SHINGLE STICK

CODES	mL	pcs
00057008	310	12

Yield of 1 cartridge equal to about 3 linear metres for metal sheet work.



PERGOLAS AND PORCHES


Ideal solution for roofing small structures such as canopies, pergolas or porches.

■ RECOMMENDATIONS FOR INSTALLATION







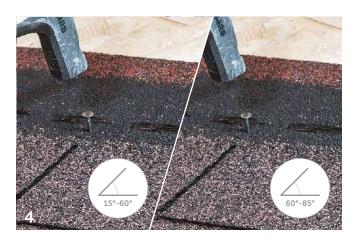









■ RECOMMENDATIONS FOR INSTALLATION

















I TOOLS

CAP SUPER ROOFING SYSTEM FOR CONSTRUCTION SITES
CAP TOP TARPAULIN FOR ROOFS
LIZARD UNWINDER FOR NAIL POINT
SEALING TAPE325 ROLLER
ROLL FOR BELTS
SPEEDY ROLL SPEEDY BAND UNWINDER WITH LONG HANDLE
WINGBAG INFLATABLE AIR CUSHION WITH HAND PUMP MADE
OF FIBRE-REINFORCED SYNTHETIC MATERIAL
BRUSH BRUSHES AND ROLLERS327
NITRAN
NYLON-ELASTAN/NITRILE FOAM GLOVES
GLASS 1 GLASSES WITH TEMPLES
MARLIN CUTTER ALLROUND
CUTTER FOR PROFESSIONAL CUTTING
LAMA KNIFE FOR INSULATION MATERIAL
KOMPRI CLAMP EXPANDING TAPE STAPLE
HAMMER STAPLER 47
HAMMER STAPLER330 HAMMER STAPLER 22
HAMMER STAPLER
HAND STAPLER MANUAL STAPLER
STAPLES CHISEL TIP
FLY SOFT SEALANT GUN FOR 600 mL SOFT CARTRIDGES
FLY PROFESSIONAL GUN FOR 310 mL CARTRIDGES332
FLY FOAM AUTOMATIC LONG TUBE GUN FOR FOAMS
FOAM CLEANER
DETERGENT FOR CARTRIDGE GUNS

CAP SUPER

VIDEO

ROOFING SYSTEM FOR CONSTRUCTION SITES

- With this solution you can reduce or increase the size of the roofing system to adapt it to the floors
- Thanks to the reinforced metal eyelets on the edge and underside, the tarpaulin can be fixed every metre on the roof
- The large mass per unit area and the type of material guarantee better mechanical resistance and durability over time

Tribations.

■ CODES AND DIMENSIONS

CODE	description	pcs
1 CAPSUPER88	tarpaulin for roof 8 x 8 m	1
2 CAPSUPER48	1/2 tarpaulin for roof 8 x 4 m	1
3 CAPSUPERCOL	sealing element	1
4 CAPSUPERPAD	inflatable element	1
5 CAPSUPERPIL	element for columns	1

■ COMPLEMENTARY PRODUCTS

CODE	description	pcs
6 CAPPUMP	adapter for pneumatic compressor	1
7 CAPLOOP	fastening carabiner	25
8 CAPGLUE	50 mL repair adhesive	1



Scan the QR Code and watch the video on our YouTube channel





MATERIAL

Sturdy, slightly transparent polyester fabric for immediate identification of openings and elements under the tarpaulin.

PROTECTION

Durable protection against moisture and dust penetration in the event of delays and work stoppages, or if the floor remains uncovered for extended periods.



■ TECHNICAL DATA

Properties	standard	values
Mass per unit area	ISO 2286-2	670 g/m ²
Thickness	ISO 2286-3	0,5 mm
Tensile strength (transverse and longitudinal)	EN ISO 1421	3000 / 3000 N/50 mm
Tear resistance (transverse and longitudinal)	DIN 53363	300 / 300 N
Cold resistance	EN 1876-1 ASTM D2136	-30°C
Temperature resistance	IVK/Pkt.5	+70°C
UV colour resistance	ISO 107-B02	7/8 (on a scale from 1 to 8)
Bending strength	DIN 53359 shape A	100,000 x - no cracks



COLUMNS

Thanks to the adjustable element for columns, it is also possible to hermetically seal chimney or pillar crossing points.

I CAP TOP

TARPAULIN FOR ROOFS

- Each size is equipped with a reinforced lifting hook for easier installation
- Thanks to metal eyelets, the tarpaulin can be fixed every metre on the roof
- The large mass per unit area and the type of material guarantee better mechanical resistance and durability over time
- When fixing the tarpaulin to the roof it is important that all eyelets are always anchored so that the wind load is spread over as many eyelets as possible




CODES AND DIMENSIONS

CODE	sizes [m]	weight [kg]	pcs
CAPTOP1012	10 x 12	72,0	1
CAPTOP1214	12 x 14	100,8	1
CAPTOP1416	14 x 16	134,4	1

Other sizes and/or personalised sheets can be supplied on request.

■ TECHNICAL DATA

Properties	standard	values
Mass per unit area	ISO 2286-2	600 g/m ²
Thickness	ISO 2286-3	0,5 mm
Tensile strength (transverse and longitudinal)	ISO 1421-1	2200 / 2000 N/50 mm
Tear resistance (transverse and longitudinal)	ISO 1421-1	280 / 250 N/50 mm
UV colour resistance	ISO 105 B02	7/8 (on a scale from 1 to 8)
Eyelet tear resistance	-	100 kg

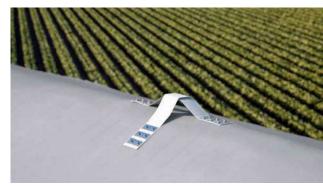

MATERIAL

Truck tarpaulin in polyester covered in matt lacquered PVC.

PROTECTION

During construction, it offers temporary protection against rain and avoids infiltration of dust and construction remains into the cracks between the panels.

LIZARD

VIDEO

UNWINDER FOR NAIL POINT SEALING TAPE

TIME SAVING

Thanks to the fast and precise application of the nail tip tape, application costs can be considerably reduced.

WATERPROOF

The correct application of the nail point tape guarantees the membrane impermeability in case of perforation by means of fastening.



CODES AND DIMENSIONS

CODE	description	pcs
LIZARD	unwinder	1



VIDEO

Scan the QR Code and watch the video on our YouTube channel





RECOMMENDED PRODUCT

Optimal with NAIL PLASTER single-sided nail point tape.

FIELDS OF USE

For nail point tape from 50 to 80 mm wide and timbers from 40×40 mm to 80×80 mm.

ROLLER

ROLL FOR BELTS



CODES AND DIMENSIONS

	CODE	description	size	pcs
			[mm]	
1	RLL40	silicone roller	40	1
2	RLL45	PUR roll	45	1



SPEEDY ROLL

SPEEDY BAND UNWINDER WITH LONG HANDLE

CODES AND DIMENSIONS

CODE	description	length	pcs
		[cm]	
SPEEDYROLL	SPEEDY BAND unwinder	120 - 200	1

OPTIONAL ITEMS

CODE	В	L	pcs
	[mm]	[m]	
SPEEDY60	60	25	10



WINGBAG

INFLATABLE AIR CUSHION WITH HAND PUMP MADE OF FIBRE-REINFORCED SYNTHETIC MATERIAL



CODE	pcs
WINBAG	4



BRUSH

BRUSHES AND ROLLERS



CODE	sizes	pcs
	[mm]	
1 BRS560	5 x 60	1
2 BRS414	40 x 140	1
3 BRS625	Ø60 x 250	1



I NITRAN

NYLON-ELASTAN/NITRILE FOAM GLOVES





CODE	size	pcs
NIT8	8	1
NIT9	9	1
NIT10	10	1



GLASS 1

GLASSES WITH TEMPLES



CODE	description	pcs
GLASS1	side protection	1



MARLIN

CUTTER ALLROUND

- Provided with triple-sharpened blades
- Extremely robust 100% rust proof spare blade compartment not







CODE	description	pcs
MARLIN	cutter	1
MARBLA	spare blades	10



CUTTER

FOR PROFESSIONAL CUTTING

- The safety lever allows the blade to be changed quickly and easily
- Thanks to the soft support, it is even easier to use the thumb to generate maximum pressure



	CODE	description	pcs
1	CUTTER	cutter with 5 spare blades	1
	CUT60	spare trapezoidal blade	10
2	CUTSET	cutter in a practical nylon case with: 10 pcs. trapezoidal blades 5 pcs. hook blades 2 pcs. linoleum blades 2 pcs. precision cut blades	1



LAMA

KNIFE FOR INSULATION MATERIAL

- It can be used on both sides, 2 mm thick stainless steel blade
- Ergonomic handle shape for optimal processing of insulation material



■ CODES AND DIMENSIONS

CODE	blade length	weight	pcs
	[mm]	[g]	
LAMA	280	175	1



KOMPRI CLAMP

EXPANDING TAPE STAPLE



CODE	opening dimensions	
	[mm]	
KOMPRICLAMPS	0-30	5
KOMPRICLAMPL	40-95	5



HAMMER STAPLER 47

HAMMER STAPLER

Weight: 0,87 kgBack width: 10,6 mm



■ CODES AND DIMENSIONS

CODE	pcs
HH735347	1



HAMMER STAPLER 22

HAMMER STAPLER

Weight: 1,04 kgBack width: 10,6 mm



CODE	pcs
HH735322	1



I HAND STAPLER

MANUAL STAPLER

Weight: **0,6 kg**Back width: **10,6 mm**



■ CODES AND DIMENSIONS


CODE	pcs
RTHH14B	1



STAPLES

CHISEL TIP

• Wire 0,5 mm







CODE	L	cladding	со	mpatible machi	ine	pcs	kg	pcs/
	[mm]		HH735347	HH735322	RTHH14B			
HH10005121	6	zinc plated	•		•	5000	0,5	6000000
HH10005122	8	zinc plated	•	•	•	5000	0,6	6000000
HH10005123	10	zinc plated	•	•	•	5000	0,7	6000000
HH10005124	12	zinc plated		•	•	5000	0,7	6000000
HH10005125	14	zinc plated		•	•	5000	0,8	6000000

| FLY SOFT

SEALANT GUN FOR 600 mL SOFT CARTRIDGES

• For all soft cartridges up to 600 mL, robust body





■ CODES AND DIMENSIONS

CODE	description	pcs
FLYSOFT	for 600 mL soft cartridges	1
FLYSOFT2	5 spare plungers, 1 nozzle, 1 angled nozzle, 1 grout nozzle	1
FLYSOFT3	spare plungers	5



I FLY

PROFESSIONAL GUN FOR 310 mL CARTRIDGES

• High stability gun for standard 310 mL cartridges





CODE	description	pcs
FLY	for cartridges of 310 mL	1



FLY FOAM

AUTOMATIC LONG TUBE GUN FOR FOAMS

- For all common bayonet lock foam cartridges
- With screw for flow regulation





CODES AND DIMENSIONS

CODE	description	pcs
FLYFOAM	foam gun	1



I FOAM CLEANER

DETERGENT FOR CARTRIDGE GUNS

• It allows the internal cleaning of cartridge guns, preventing foam residues from impairing their operation



■ CODES AND DIMENSIONS

CODE	content	pcs
	[mL]	
FLYCLEAN	500	12

Aerosol 1. Eye Irrit. 2. STOT SE 3.





I PRODUCTS LIST

CODE	description	page
ALPHA	preshaped profile for sealing corners	143
ALU BAND	reflective single-sided adhesive tape for indoor use	61
ALU BUTYL BAND	reflecting butyl adhesive tape	134
ALU FLASH CONNECT	aluminium and self-adhesive butyl version	178
BARRIER ALU FIRE A2 SD2500	reflective air vapour barrier fire reaction class A2-s1,d0	216
BARRIER ALU NET SD150	reflective vapour barrier Sd 150 m	213
BARRIER ALU NET SD1500	reflective vapour barrier Sd > 1500 m	214
BARRIER NET ADHESIVE 200	self-adhesive vapour barrier screen with reinforcement grid	210
BARRIER NET SD40	vapour barrier Sd 40 m	206
BARRIER SD150	vapour barrier Sd > 145 m	208
BIRD COMB	standard eaves bird comb	188
BIRD COMB EVO	twin row eaves bird comb	189
BIRD SPIKE	rigid bird spikes	187
BLACK BAND	universal single-sided butyl tape	136
BRUSH	brushes and rollers	327
BRUSH VENT	rigid under-ridge with side brushes	171
BUTYL BAND	double-sided universal butyl tape	129
BYTUM 1100	bituminous underlay control layer	304
BYTUM 1500	bituminous underlay control layer	305
BYTUM 2000	bituminous underlay control layer	306
BYTUM 400	bituminous underlay control layer	302
BYTUM 750	bituminous underlay control layer	303
BYTUM BAND	self-adhesive bituminous band, can be plastered	42
BYTUM BASE 2500	self-adhesive bituminous membrane	308
BYTUM LIQUID REINFORCEMENT		48
BYTUM SLATE 3500	self-adhesive slated bituminous membrane	310
BYTUM SPRAY	bituminous membrane sealant spray	46
CAP SUPER	roofing system for construction sites	322
CAPTOP	tarpaulin for roofs	324
CLIMA CONTROL 80	membrane with variable vapour diffusion	228
CLIMA CONTROL NET 145	membrane with variable vapour diffusion and reinforcement grid	230
CLIMA CONTROL NET 160	membrane with variable vapour diffusion and reinforcement grid	232
CONNECT BAND	sealing wall barrier for irregular substrates	32
CONSTRUCTION SEALING	compressible sealing gasket for regular joints	52
CUTTER	for professional cutting	328
DGZ	double threaded screw for insulation	144
DOUBLE BAND	universal double-sided tape	62
EASY BAND	universal single-sided tape	68
EASY FOAM		
	general purpose foam sealant	115
ECO GLUE	adhesive glue for sealing membranes on biological basis	149
EXPAND BAND	self-expanding sealing tape	108
FACADE BAND UV	universal single-sided tape, resistant to UV rays	76
FIRE FOAM	high fire-resistant sealing foam	118
FIRE SEALING ACRYLIC	high fire-resistant acrylic sealant	122
FIRE SEALING SILICONE	high fire-resistant silicone sealant	124
FIRE STRIPE	intumescent thermo-inflatable flexible gasket	130
FLEXI BAND	universal single-sided high-adhesive tape	72
FLEXI BAND UV	universal single-sided adhesive tape with high UV stability and heat resistance	74
FLUID MEMBRANE	synthetic sealing membrane for brush and spray application	50
FLY	professional gun for 310 mL cartridges	332
FLY FOAM	automatic long tube gun for foams	333
FLY SOFT	sealant gun for 600 mL soft cartridges	332
FOAM CLEANER	detergent for cartridge guns	333
FRAME BAND	self-expanding sealing tape for windows/doors	112
FRONT BAND UV 210	universal single-sided tape, highly resistant to UV rays	98
GASKET	gasket for valley	180
GLASS 1	glasses with temples	327
GROUND BAND	self-adhesive bituminous membrane	34
GUTTER	flashing	179
HAMMER STAPLER 22	hammer stapler	330
HAMMER STAPLER 47	hammer stapler	330
HAND STAPLER	manual stapler	331
HERMETIC FOAM	high performing soundproofing sealing foam	116
SULFIX	anchor for fastening insulation to brickwork	145
KOMPRI CLAMP	expanding tape staple	329
_AMA	knife for insulation material	329
EVEL BAND	sealing wall barrier for foundations	33
LITE BAND	acrylic single-sided adhesive tape	144
LIZARD	unwinder for nail point sealing tape	325
MANICA FLEX	sealing sleeve for conduit and cable passage	140
MANICA FLEX	lead profile with EPDM sleeve	142
MANICA LEAD MANICA PLASTER	adhesive sealing sleeve that can be plastered	138
MANICA PLASTER MANICA POST	adhesive sealing sleeve trial carrier plastered	142
MANUA FUST	self-adhesive lead and butyl version	142 178
MANICA POLI		1/8
	,	
MARLIN	cutter allround	328
MANICA ROLL MARLIN MEMBRANE GLUE METAL ROLL	,	

CODE	description	page
NAIL BAND	butyl nail point sealant tape	128
NAIL PLASTER GEMINI	high-adhesion nail point sealant tape	126
NET ROLL	flexible ventilated under-ridge	168
NITRAN	nylon-elastan/nitrile foam gloves	327
OUTSIDE GLUE	high elasticity universal adhesive glue for external use	154
PEAK EASY	ventilated rigid ridge roll	174
PEAK HOOK	ridge fastening hook for flat and shaped tiles	175
PEAK ONE	ventilated under-ridge for single pitch	173
PEAK VENT AISI 430	rigid under-ridge kit	172
PLASTER BAND PLASTER BAND LITE	special high-adhesion tape, can be also plastered	84
PRIMER	tape with adhesive mounting strip, can be plastered universal primer for acrylic adhesive tapes	92
PRIMER SPRAY	universal spray primer for acrylic adhesive tapes	103 102
PROTECT	self-adhesive butyl band, can be plastered	102
RADON FLOOR	waterproofing radon gas barrier for foundations	38
RAIN TUBE	temporary downpipe for construction site phases	191
ROLLER	roll for belts	326
SEAL BAND SEAL SQUARE	single-sided tape for indoor use	64
SHINGLE	bituminous tile	314
SMART BAND	universal single-sided tape with separable liner	80
SNOW STOP	snow stopper hook for ridge tiles and tiles	181
SOFT FLASH CONNECT	EPDM and butyl self-adhesive version	178
SOLID BAND	robust single-sided adhesive tape suitable for low temperatures	78
SPEEDY BAND	universal single-sided tape without release liner	70
SPEEDY ROLL	SPEEDY BAND unwinder with long handle	326
STANDARD ROLL	flexible ventilated under-ridge	169
STAPLES	chisel tip	331
START BAND	waterproofing profile with high mechanical resistance	30
SUPERB GLUE	high elasticity adhesive glue for sealing membranes	150
SUPPORT BATTEN	metal batten-holders	176
SUPRA BAND	universal double-sided butyl tape with high adhesiveness	132
TERMI FLOOR	waterproofing anti-termite barrier for foundations	40
TERRA BAND UV	butyl adhesive tape	100
THERMOWASHER	washer to fasten insulation to timber	145
TIE-BEAM STRIPE	tie beam sealing profile	54
TILE STOP L	L pre-shaped hooks for plain tiles	183
TILE STOP S	S pre-shaped hooks for plain tiles	182
TILE STOP WIND	pre-shaped bracing hooks for tiles	184
TILE STOP WIND COPPO	pre-shaped bracing hooks for ridge tiles	185
TRASPIR 110	highly breathable membrane	253
TRASPIR 135	highly breathable membrane	257
TRASPIR 150	highly breathable membrane	260
TRASPIR 200 TRASPIR 95	highly breathable membrane highly breathable membrane for walls	264
TRASPIR 45	3 7	252
TRASPIR ALU 120	highly breathable self-adhesive membrane highly breathable membrane	276
TRASPIR ALU 200	reflective highly breathable membrane	256 265
TRASPIR ALU FIRE A2 430	reflective highly breathable membrane	
TRASPIR DOUBLE EVO 340	monolithic and microporous breathable membrane	292 284
TRASPIR DOUBLE NET 270	highly breathable membrane	280
TRASPIR EVO 160	highly breathable monolithic membrane	262
TRASPIR EVO 220	highly breathable monolithic membrane	274
TRASPIR EVO 300	highly breathable monolithic membrane	282
TRASPIR EVO SEAL 200	highly breathable monolithic membrane, perforation-proof	266
TRASPIR EVO UV 115	highly breathable monolithic membrane resistant to UV rays	254
TRASPIR EVO UV 210	highly breathable monolithic membrane resistant to UV rays	270
TRASPIR FELT EVO UV 210	breathable monolithic membrane resistant to UV rays	269
TRASPIR METAL	3D mats for metal roofs	294
TRASPIR NET 160	highly breathable membrane	261
TRASPIR WELD EVO 360	weldable monolithic breathable membrane	288
TUBE STOPPER	cable sealing plugs	143
VALLEY ALU	strengthening element for valleys	180
VAPOR 140	vapour control membrane	235
VAPOR 150	vapour control membrane	236
VAPOR 225	vapour control membrane	240
VAPOR ADHESIVE 260	self-adhesive vapour control membrane	242
VAPOR EVO 190	high performance vapour control membrane	238
VAPOR IN 120	vapour control membrane	218
VAPOR IN GREEN 200	vapour control membrane based on natural cellulose	221
VAPOR IN NET 140	vapour control membrane with reinforcement grid	219
VAPOR NET 110	vapour control membrane with reinforcement grid	234
VAPOR NET 180	vapour control membrane with reinforcement grid	237
VENT FOLD	pre-bent grid for ventilation	187
VENT GRILLE	PVC ventilation grid	186
VENT MESH	flexible ventilation grid	186
VENT SHAPE	ventilation grid for roofs made of tiles of various shape	190
WINDOW BAND	self-expanding sealing tape for windows/doors	110
WINGBAG	inflatable air cushion with hand pump made of fibre-reinforced synthetic material	326

Rotho Blaas Srl does not guarantee the legal and/or design conformity of data and calculations, as Rotho Blass provides indicative tools such as technical-commercial service within the sales activity.

Rotho Blaas Srl follows a policy of continuous development of its products, thereby reserving the right to modify their characteristics, technical specifications and other documentation without notice.

The user or the designer are responsible to verify, at each use, the conformity of the data to the regulations in force and to the project. The ultimate responsibility for choosing the appropriate product for a specific application lies with the user/designer.

The values resulting from "experimental investigations" are based on the actual test results and valid only for the test conditions specified.

Rotho Blaas Srl does not guarantee and in no case can be held responsible for damages, losses and costs or other consequences, for any reason (warranty for defects, warranty for malfunction, product or legal responsibility, etc.) deriving from the use or inability to use the products for any purpose; from non-conforming use of the product;

Rotho Blaas Srl is not liable in any way for any errors in printing and/or typing. In the event of differences between the contents of the catalogue versions in the various languages, the Italian text is binding and takes precedence with respect to the translations.

Pictures are partially completed with accessories not included. Images are for illustration purposes only. Packaged quantities may vary.

This catalogue is private property of Rotho Blaas Srl and may not be copied, reproduced or published, totally or in part, without prior written consent. All violations will be prosecuted according to law.

The general purchase conditions of Rotho Blaas Srl are available on the website www.rothoblaas.com.

All rights reserved. Copyright © 2021 by Rotho Blaas Srl All renderings © Rotho Blaas Srl

TAPES AND SEALANTS 19 CONNECTION TO THE GROUND 28 **ACRYLIC TAPES** 56 **EXPANDING TAPES** 104 **SEALANTS** 114 **FASTENERS** 144 **GLUES** 146 ROOF AND VENTILATION **ELEMENTS** 163 RIDGE 168 CHIMNEY CONNECTION 178 **EAVES GUTTER** 180 SNOW PROTECTION 181 CLIPS 182 VENTILATION AND PROTECTION 186 MEMBRANES 197 BARRIERS AND STOPS 205 **BREATHABLE** 247 BITUMINOUS 301 TOOLS 321 TARPAULINS FOR ROOFS 322 INSTALLATION 325 **CUTTING TOOLS** 328

USC

STAPLERS

GUNS

United States Customary units

United States Customary Units

The United States Customary Units (USC) is a widely used system that evolved from the British imperial system. All customary units can be converted to International System (IS) units and vice versa.

330

332

The values are indicated in the International System and in the US Customary Unit to improve the catalogue usability and facilitate the decision-making process. Some values resulted from tests and have been converted to USC, so they are often rounded. To find the most accurate value, it is recommended to refer to the value expressed in the International System.

LEGEND

 $[m^2]$ Α area [ft²] [mm] В base [in] [mm] Н height [m] [ft] [mm] [in] L length [m][ft] [mm] Р depth [mm] thickness [mil] [mm] Ø through-element diameter

MD longitudinal values with respect to the direction of the membrane/tape rolls

CD transversal values with respect to the direction the membrane/tape rolls

TT integrated double tape

VOC Volatile Organic Compounds



pieces / package



rolls for pallet



rolls for pallet

















- FASTENING
- AIRTIGHTNESS AND WATERPROOFING
- SOUNDPROOFING
- FALL PROTECTION
- TOOLS AND MACHINES

Rothoblaas is the multinational Italian company that has made innovative technology its mission, making its way to the forefront for timber buildings and construction safety in just a few years. Thanks to its comprehensive product range and the technically-prepared and widespread sales network, the company promotes the transfer of its knowhow to the customers and aims to be a prominent and reliable partner for developing and innovating products and building methods. All of this contributes to a new culture of sustainable construction, focused on increasing comfortable living and reducing CO₂ emissions.

Rotho Blaas Srl

Via dell'Adige N.2/1 | 39040, Cortaccia (BZ) | Italia Tel: +39 0471 81 84 00 | Fax: +39 0471 81 84 84 info@rothoblaas.com | www.rothoblaas.com









